

Kingtronics®

SR320 THRU SR3100

SCHOTTKY BARRIER RECTIFIER

REVERSE VOLTAGE 20 to 100 Volts FORWARD CURRENT 3.0 Ampere

FEATURES

- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High reliability


MECHANICAL DATA

- Case: DO-27, Mold plastic
- Epoxy: UL94V-0 rate flame retardant
- Polarity: Indicated by cathode band
- Lead: MIL-STD-202E, Method 208 guaranteed
- Mounting position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified ,
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load derate current by 20%

DO-201AD (DO-27)

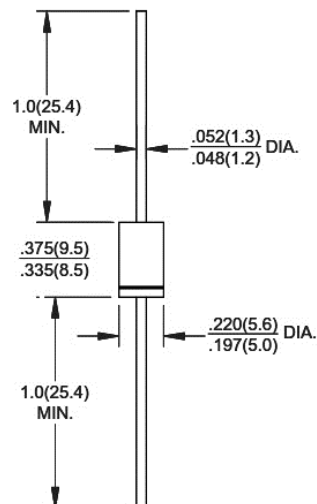

Dimensions in inches and (millimeters)

PARAMETER	SYMBOL	SR 320	SR 330	SR 340	SR 350	SR 360	SR 380	SR 3100	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	100	VOLTS
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	56	70	VOLTS
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	80	100	VOLTS
Maximum Average Forward Rectified Current	$I_{(AV)}$	3.0							Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	80							Amps
Maximum instantaneous forward voltage at 3.0A	V_F	0.55		0.70		0.85		VOLTS	
Maximum DC Reverse Current at Rated DC blocking voltage	I_R	$T_A = 25^\circ C$							mA
		$T_A = 100^\circ C$							
Typical Junction Capacitance (NOTE 1)	C_J	250							pF
Typical Thermal Resistance (NOTE 2)	$R_{\theta JA}$	20							$^\circ C/W$
Operating temperature range	T_J	-55 to +125							$^\circ C$
Storage temperature range	T_{STG}	-55 to +150							$^\circ C$

1- Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.

2-Thermal Resistance from Junction to Ambient at .375" (9.5mm)lead length, P.C. board mounted.

Kingtronics® International Company

Website: www.kingtronics.com Email: info@kingtronics.com Tel: (852) 8106 7033 Fax: (852) 8106 7099

Kingtronics®

SR320 THRU SR3100

RATINGS AND CHARACTERISTIC CURVES

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

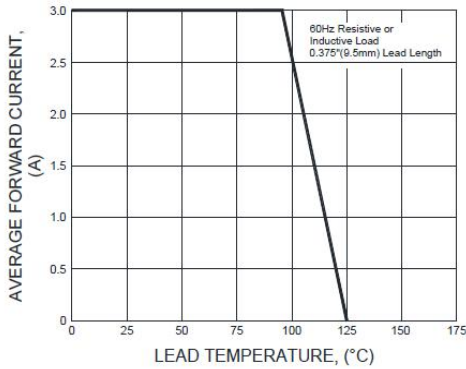


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

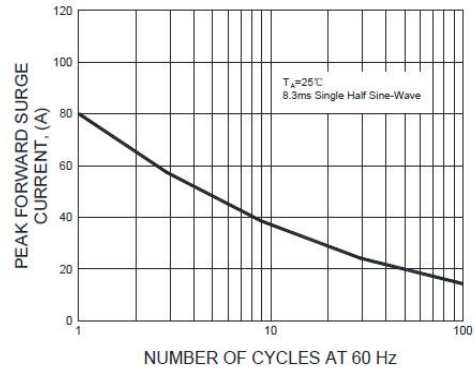


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

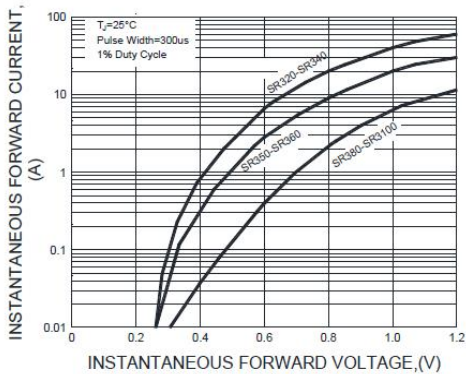


FIG.4-TYPICAL REVERSE CHARACTERISTICS


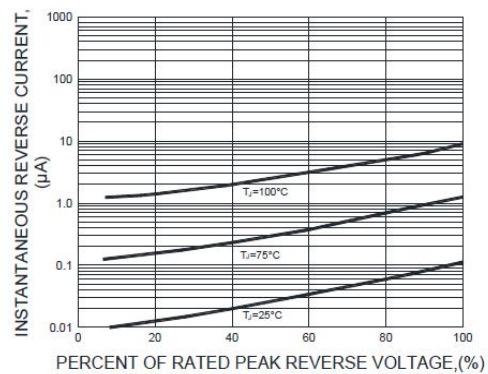


FIG.5-TYPICAL JUNCTION CAPACITANCE

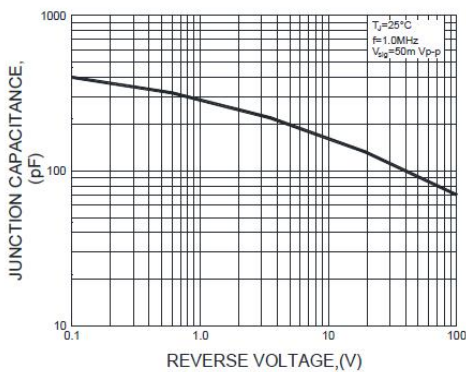

Note: Specifications are subject to change without notice.

Kingtronics® International Company