



SEP ELECTRONIC CORP.

SR320 thru SR3100

3.0 A Schottky Barrier Rectifier
Rectifier Reverse Voltage 20 to 100V



DO-27

Features

- Extremely low VF
- Epitaxial construction
- Low power loss, high efficiency
- Low stored charge, majority carrier construction
- Plastic material has UL flammability classification 94V-0

Mechanical Data


Case: Molded plastic

Terminals: Solder plated solderable per MIL-STD-202,
Method 208

Polarity: Cathode band

Mounting Position: Any

Weight: 1.10 grams (approx)

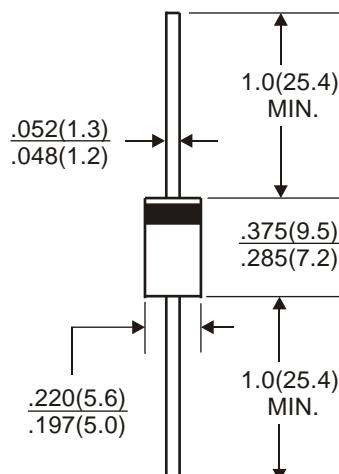

All dimensions inches and (millimeters)

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
For Capacitive load derate current by 20%.

Parameter	Symbol	SR320	SR330	SR340	SR350	SR360	SR380	SR3100	unit
Maximum recurrent peak reverse voltage	VRRM	20	30	40	50	60	80	100	V
Maximum RMS voltage	VRMS	14	21	28	35	42	56	70	V
Maximum DC blocking voltage	VDC	20	30	40	50	60	80	100	V
Maximum average forward rectified current 9.5 mm lead length (see fig.1)	IF(AV)					3.0			A
Peak forward surge current, single sine-wave superimposed on rated load (JEDEC Method)	IFSM					80			A
Typical thermal resistance	ReJA				30				°C/W
Typical junction capacitance	Cj				250				pF
Operating junction temperature range	TJ		-55 to + 125			-55 to + 150			°C
Storage temperature range	TSTG				55 to + 150				°C

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
For Capacitive load derate by 20 %.

Parameter	Symbol	SR320	SR330	SR340	SR350	SR360	SR380	SR3100	Unit
Maximum instantaneous forward voltage drop at 3.0A	VF		0.50		0.74		0.85		V
Maximum DC reverse current at rated TA = 25°C DC blocking voltage per element TA = 100°C	IR			3.0		30.0			mA

Rating and Characteristic Curves ($T_A = 25^\circ\text{C}$ Unless otherwise noted)
SR320 thru SR3100

Fig. 1 Forward Current Derating Curve

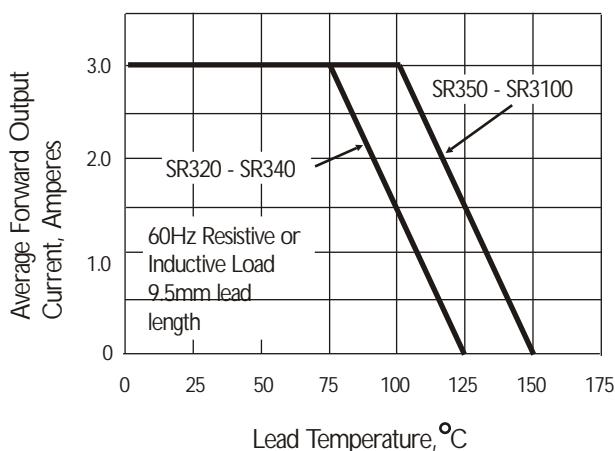


Fig. 3 Maximum Non-repetitive Forward Surge Current

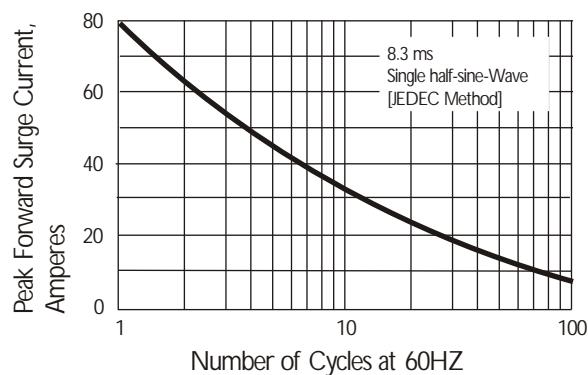


Fig. 4 Typical Junction Capacitance

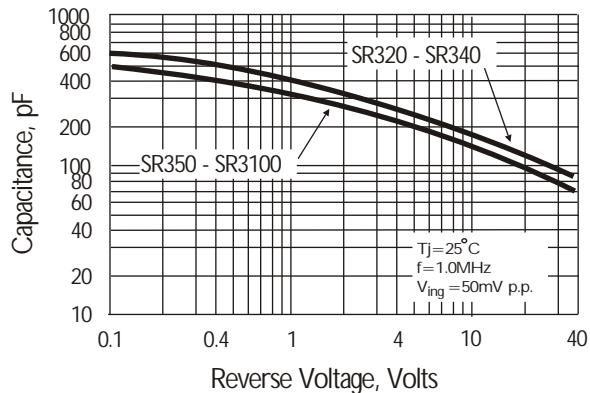


Fig. 2 Typical Instantaneous Forward Characteristics

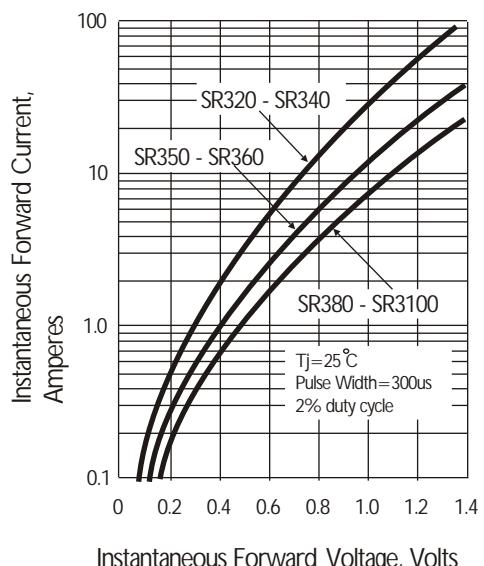


Fig. 5 Typical Reverse Characteristics

