


### DO-201AD

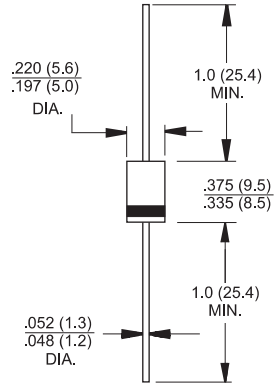

### Features

- ✧ Low power loss, high efficiency.
- ✧ High current capability, Low VF.
- ✧ High reliability
- ✧ High surge current capability.
- ✧ Epitaxial construction.
- ✧ Guard-ring for transient protection.
- ✧ For use in low voltage, high frequency inverter, free wheeling, and polarity protection application

### Mechanical Data

- ✧ Cases: DO-201AD molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Polarity: Color band denotes cathode
- ✧ High temperature soldering guaranteed: 260°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Weight: 1.2 grams

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

| Type Number  | Symbol          | SR 802      | SR 803 | SR 804 | SR 805 | SR 806      | SR 809 | SR 810 | SR 815 | Units |
|--|-----------------|-------------|--------|--------|--------|-------------|--------|--------|--------|-------|
| Maximum Recurrent Peak Reverse Voltage   | $V_{RRM}$       | 20          | 30     | 40     | 50     | 60          | 90     | 100    | 150    | V     |
| Maximum RMS Voltage  | $V_{RMS}$       | 14          | 21     | 28     | 35     | 42          | 63     | 70     | 105    | V     |
| Maximum DC Blocking Voltage  | $V_{DC}$        | 20          | 30     | 40     | 50     | 60          | 90     | 100    | 150    | V     |
| Maximum Average Forward Rectified Current See Fig. 1   | $I_{(AV)}$      | 8.0         |        |        |        |             |        |        |        | A     |
| Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )          | $I_{FSM}$       | 150         |        |        |        |             |        |        |        | A     |
| Maximum Instantaneous Forward Voltage @8.0A  | $V_F$           | 0.55        |        | 0.70   |        | 0.92        |        | 1.02   |        | V     |
| Maximum D.C. Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$ | $I_R$           | 0.5         |        |        |        | 0.1         |        |        |        | mA    |
|  |                 | 15          |        | 10     |        | 5.0         |        |        |        | mA    |
| Typical Junction Capacitance (Note 2)  | $C_j$           | 500         |        | 270    |        | 165         |        |        |        | pF    |
| Typical Thermal Resistance (Note 1)  | $R_{\theta JA}$ | 40          |        |        |        |             |        |        |        | °C/W  |
| Operating Junction Temperature Range   | $T_J$           | -65 to +125 |        |        |        | -65 to +150 |        |        |        | °C    |
| Storage Temperature Range  | $T_{STG}$       | -65 to +150 |        |        |        |             |        |        |        | °C    |

Notes: 1. Mount on Cu-Pad Size 16mm x 16mm on P.C.B.  
2. Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.

### RATINGS AND CHARACTERISTIC CURVES (SR802 THRU SR815)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

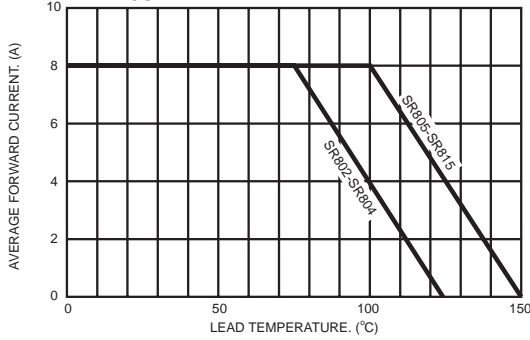


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

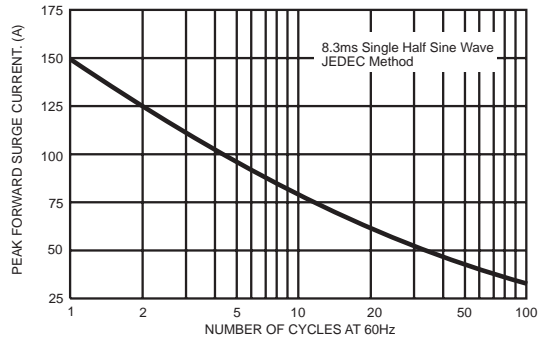


FIG.3- TYPICAL FORWARD CHARACTERISTICS

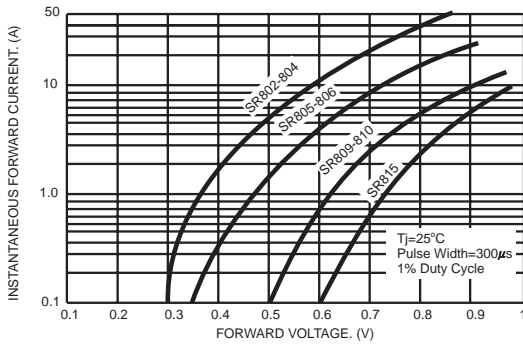


FIG.4- TYPICAL REVERSE CHARACTERISTICS

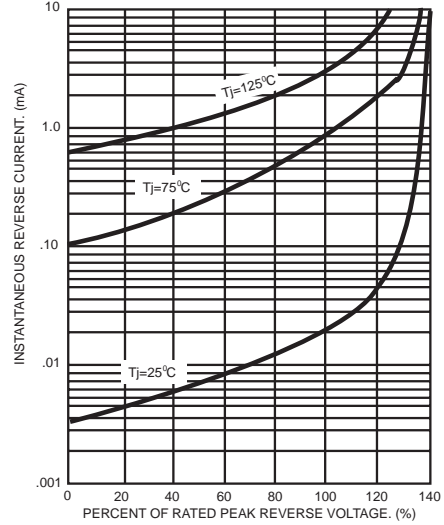


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

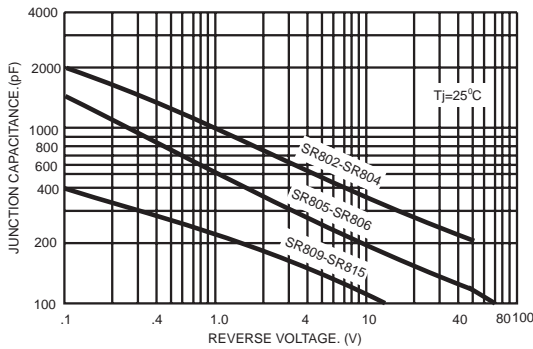


FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

