

SRGC10DH THRU SRGC10MH

FEATURES

- * Halogen-free type
- * Compliance to RoHS product
- * GPRC (Glass passivated rectifier chip) inside
- * Lead less chip form, no lead damage
- * Low power loss, High efficiency
- * High current capability
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0

APPLICATION

- * High frequency rectification
- * AC/DC Power Supply

MECHANICAL DATA

Case : Packed with FRP substrate and epoxy underfilled

Terminals : Pure Tin plated (Lead-Free),
solderable per MIL-STD-750, Method 2026.

Polarity : Laser Cathode band marking

Weight : 0.012 gram

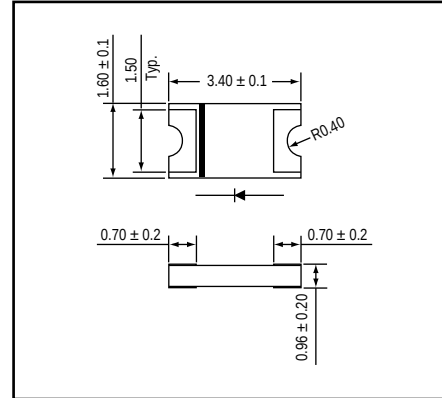
PACKING

- * 3,000 pieces per 7" (178mm ± 2mm) reel
- * 4 reels per box
- * 6 boxes per carton


OUTLINE DIMENSIONS

Case : 1206-S

Unit : mm



MARKING

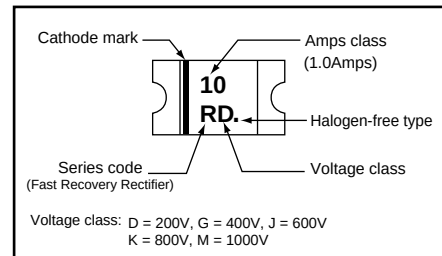






Absolute Maximum Ratings (Ta = 25 °C)

ITEM	Symbol	Conditions	SRGC10					Unit
			DH	GH	JH	KH	MH	
Repetitive peak reverse voltage	VRRM		200	400	600	800	1000	V
Average forward current	IF(AV)		1.0					A
Peak forward surge current	IFSM	8.3ms single half sine-wave	15					A
Rating for fusing (t<8.3ms)	I²t		0.9					A²sec
Reverse recovery time	Trr	IF = 0.5A, IR = 1.0A, Irr = 0.25A	150		250		300	nS
Operating storage temperature Range	Tj,TSTG		-65 to +175					°C

Electrical characteristics (Ta = 25 °C)

ITEM	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward voltage	VF	IF = 1.0A	-	1.05	1.30	V
Repetitive peak reverse current	IRRM	VR = Max. VRRM , Ta = 25 °C	-	0.10	5	uA
Junction capacitance	Cj	VR = 4V, f = 1.0 MHz	-	12	-	pF
Thermal resistance	Rth(JA)	Junction to ambient (NOTE)	-	130	-	°C/W
	Rth(JL)	Junction to lead (NOTE)	-	54	-	

NOTES : Thermal resistance from junction to ambient and from junction to lead P.C.B. mounted on 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas.

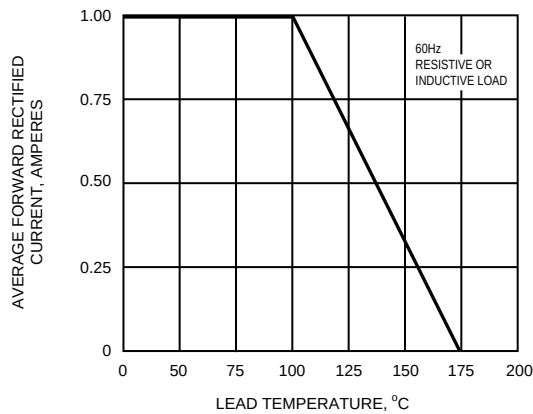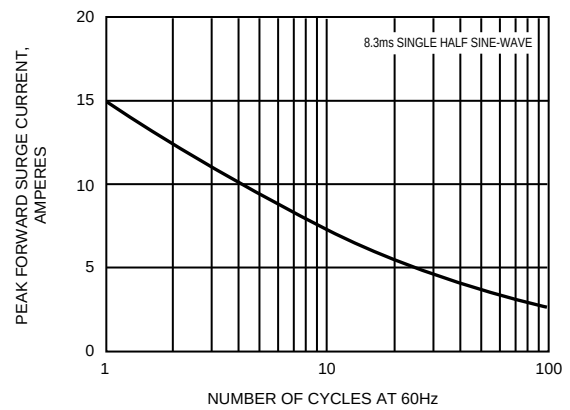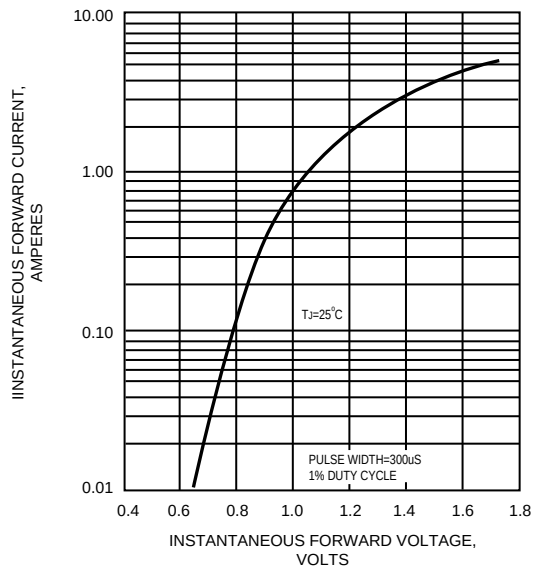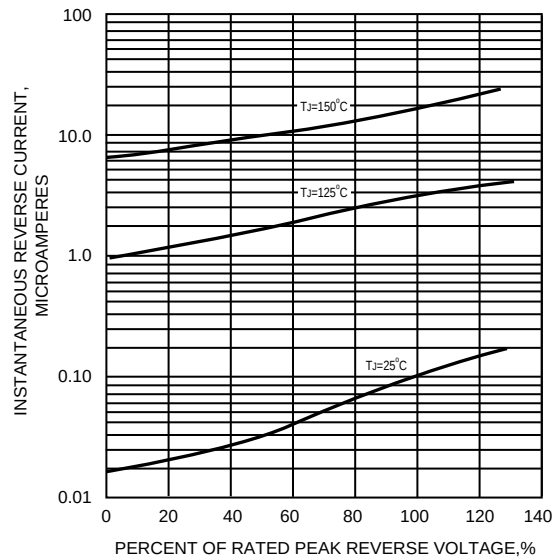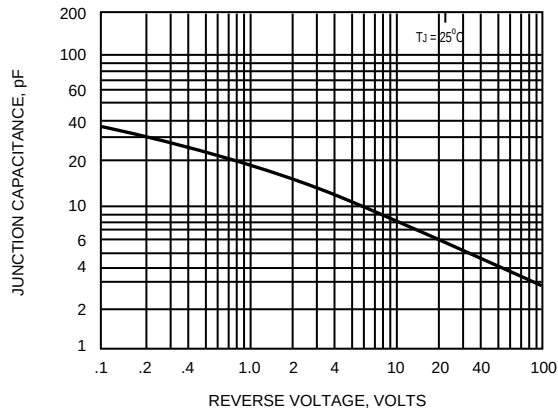FIG.1 - FORWARD CURRENT DERATING CURVE

FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

FIG.4 - TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

FIG.5 - TYPICAL JUNCTION CAPACITANCE

FIG.6 - TYPICAL TRANSIENT THERMAL IMPEDANCE
