

# ST - 1KA · ST - 1KB

The ST - 1KA and 1KB are high - sensitivity NPN silicon phototransistors mounted in durable, hermetically sealed TO - 18 metal cans, which provide years of reliable performance, even under demanding conditions such as use out - doors.

### FEATURES


- Wide angular response
- Durable
- High reliability in demanding environments
- Two leads (Collector, Emitter) ST - 1KA
- Three leads (Collector Emitter, Base) ST - 1KB

### APPLICATIONS

- Optical counters
- Optical detectors
- Infrared sensors
- Fiber optic communications

### DIMENSIONS

(Unit : mm)

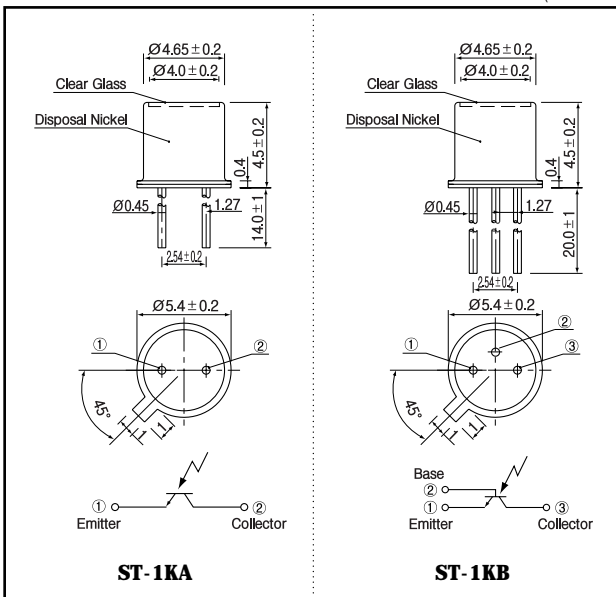

### MAXIMUM RATINGS

( $T_a = 25^\circ\text{C}$ )

Item	Symbol	Rating	Unit
C - E voltage	$V_{CE0}$	40	V
E - C voltage	$V_{ECO}$	4	V
Collector current	$I_c$	50	mA
Collector power dissipation	$P_c$	150	mW
Operating temp.	$T_{opr.}$	- 30 ~ + 100	
Storage Temp.	$T_{stg.}$	- 50 ~ + 150	
Soldering temp. *1	$T_{sol.}$	260	

\*1. For MAX. 5 seconds at the position of 2 mm from the package

### ELECTRO-OPTICAL CHARACTERISTICS

( $T_a = 25^\circ\text{C}$ )


Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Collector dark current	$I_{CEO}$	$V_{CE0} = 10V$		1	200	nA
Light current	$I_L$	$V_{CE} = 10V, 2000lx^{-2}$	0.5	2.0	5.0	mA
C - E saturation voltage	$V_{CE(sat)}$	$I_c = 2mA, 2.000lx^{-2}$		0.2	0.4	V
Switching speeds	Rise time	$V_{CC} = 10V, I_c = 5mA, R_L = 100$		0.8		$\mu\text{sec.}$
	Fall time			10		$\mu\text{sec.}$
Spectral sensitivity				500 - 1,050		nm
Peak wavelength	$\lambda_p$			880		nm
Half angle				$\pm 50$		deg.

\*2. Color temp. = 2856K standard Tungsten lamp


Photo transistors

ST - 1KA · ST - 1KB


**Collector current Vs. Collector - Emitter voltage**




**Collector current Vs. Illuminance**




**Dark current Vs. Ambient temperature**

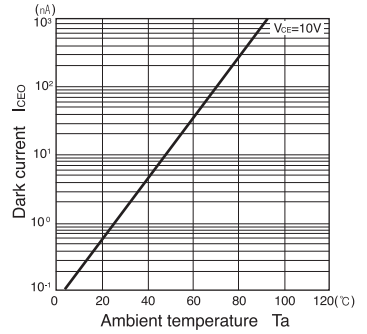


**Relative sensitivity Vs. Wavelength**

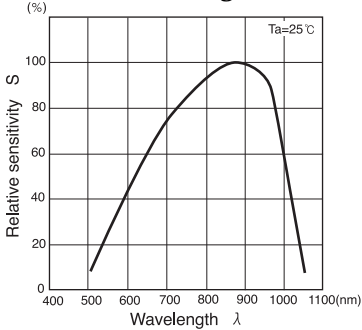

**Switching time Vs. Load resistance**



**Radiant Pattern**

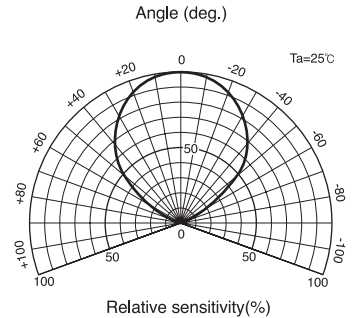

**Collector power dissipation Vs. Ambient temperature**

