


DESCRIPTION

ST04N20D is the N-Channel logic enhancement mode power field effect transistor which is produced using high cell density, DMOS trench technology. This high density process is especially tailored to minimize on-state resistance. These devices are particularly suited for low voltage application such as power management and other battery powered circuits where high-side switching.

PIN CONFIGURATION TO-252



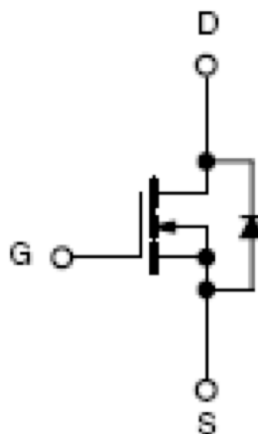
PART MARKING



P:Perduce Code W:Wafer Code
Y:Year Code A:Product Code

FEATURE

- 200V/4.0A, $R_{DS(ON)} = 400m\Omega$ @ $V_{GS} = 10V$
- Super high density cell design for extremely low $R_{DS(ON)}$
- Exceptional on-resistance and maximum DC current capability
- TO-252 package design



**ST04N20D**

N Channel Enhancement Mode MOSFET

4.0A

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C Unless otherwise noted)

Parameter		Symbol	Typical	Unit
Drain-Source Voltage		VDSS	200	V
Gate-Source Voltage		VGSS	±30	V
Continuous Drain Current (TJ=150°C)	TA=25°C	ID	4	A
	TA=100°C		1.2	
Pulsed Drain Current		IDM	15	A
Avalanche Current		IAS	10	mJ
Power Dissipation	TA=25°C	PD	68	W
Operation Junction Temperature		TJ	70	°C
Storage Temperature Range		TSTG	-55/150	°C
Thermal Resistance-Junction to Ambient		RθJA	60	°C/W

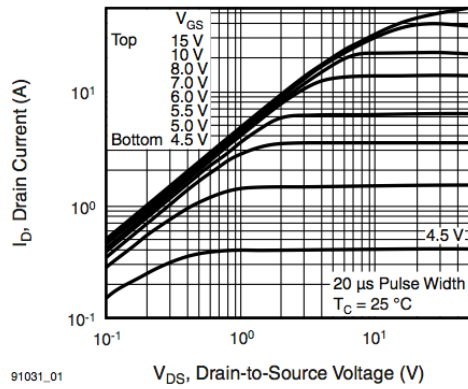
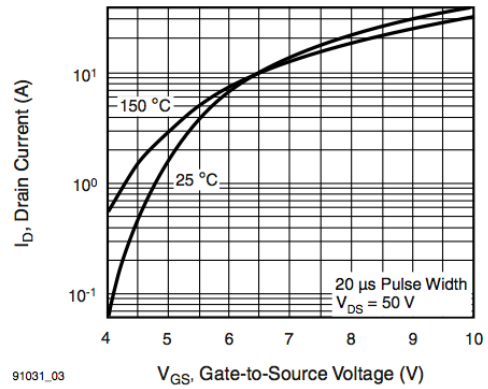
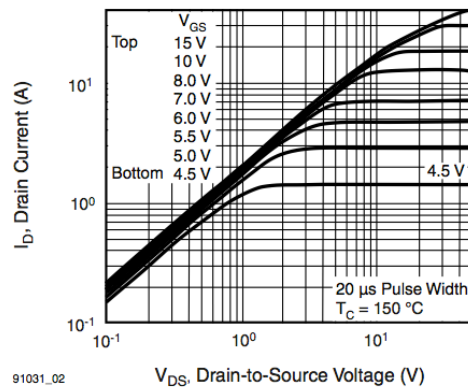
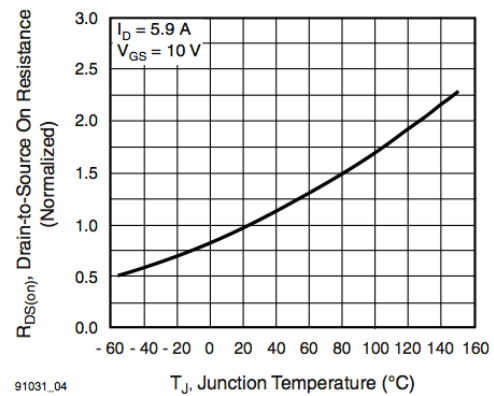

ST04N20D

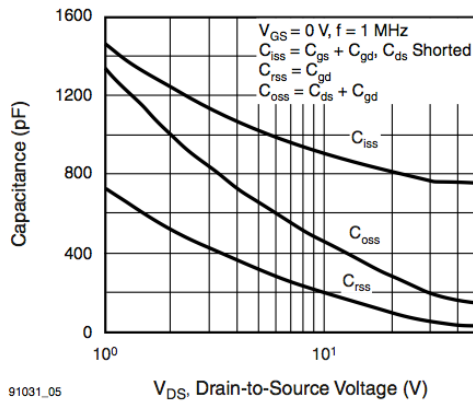
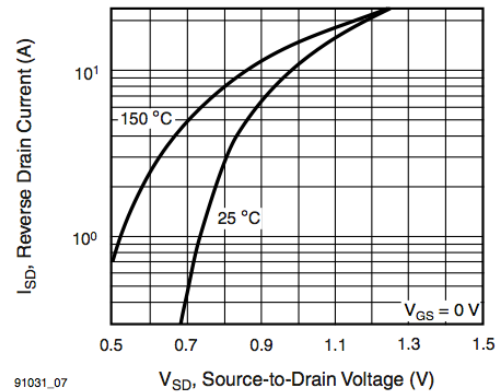
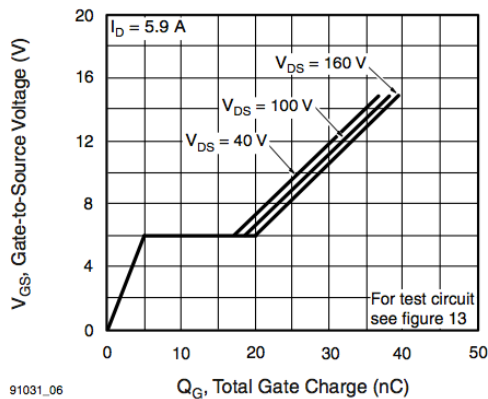
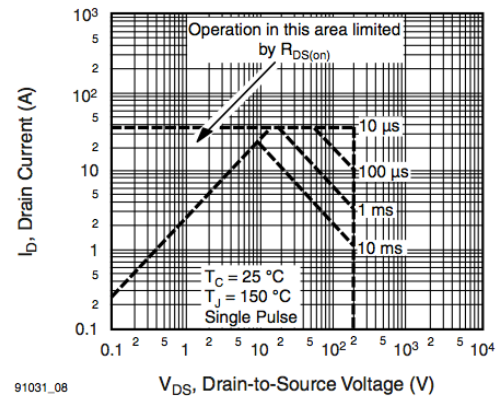

N Channel Enhancement Mode MOSFET

4.0A

ELECTRICAL CHARACTERISTICS (Ta = 25°C Unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Static						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=250\mu A$	200			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	3	4.3	5	V
Gate Leakage Current	I_{GSS}	$V_{DS}=0V, V_{GS}=\pm 30V$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=200V, V_{GS}=0V$			1	μA
Drain-source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=12A$		375	400	m Ω
Forward Transconductance	gfs	$V_{DS}=50V, I_D=3A$	3.8			S
Diode Forward Voltage	V_{SD}	$I_S=1A, V_{GS}=0V$			1	V
Dynamic						
Total Gate Charge	Q_g	$V_{DS}=160V, V_{GS}=10V$ $I_D=4 A$			45	nC
Gate-Source Charge	Q_{gs}				7.0	
Gate-Drain Charge	Q_{gd}				23	
Input Capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=0V$ $f=1MHz$		800		pF
Output Capacitance	C_{oss}			240		
Reverse TransferCapacitance	C_{rss}			76		
Turn-On Time	$t_{d(on)}$ t_r	$V_{DS}=100, R_D=13\Omega$ $V_{GEN}=10V, I_D=2 A$ $R_G=12.\Omega$		9.4		nS
Turn-Off Time	$t_{d(off)}$ t_f			23		
				38.4		
				19.6		

TYPICAL CHARACTERISTICS

Fig. 1 - Typical Output Characteristics, $T_C = 25\text{ }^{\circ}\text{C}$

Fig. 3 - Typical Transfer Characteristics

Fig. 2 - Typical Output Characteristics, $T_C = 150\text{ }^{\circ}\text{C}$

Fig. 4 - Normalized On-Resistance vs. Temperature

TYPICAL CHARACTERISTICS

Fig. 5 - Typical Capacitance vs. Drain-to-Source Voltage

Fig. 7 - Typical Source-Drain Diode Forward Voltage

Fig. 6 - Typical Gate Charge vs. Gate-to-Source Voltage

Fig. 8 - Maximum Safe Operating Area

TYPICAL CHARACTERISTICS

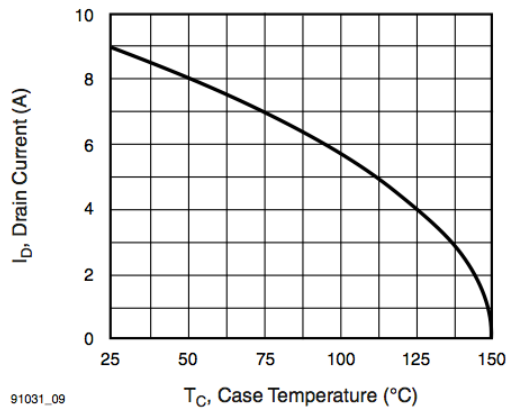


Fig. 9 - Maximum Drain Current vs. Case Temperature

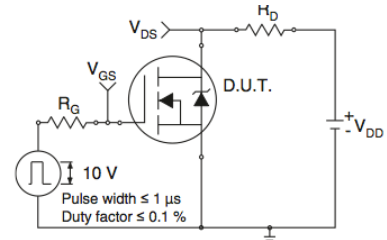


Fig. 10a - Switching Time Test Circuit

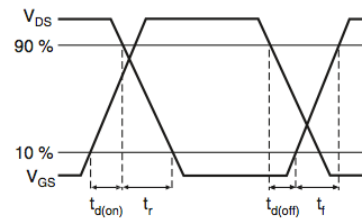


Fig. 10b - Switching Time Waveforms

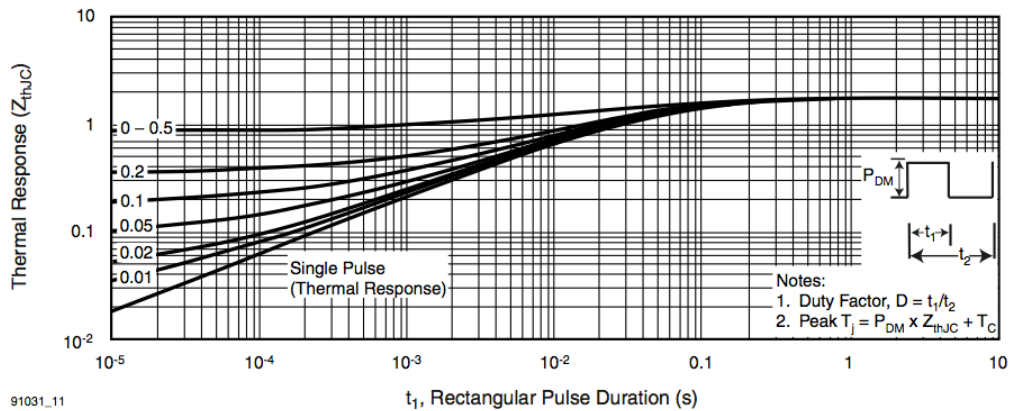
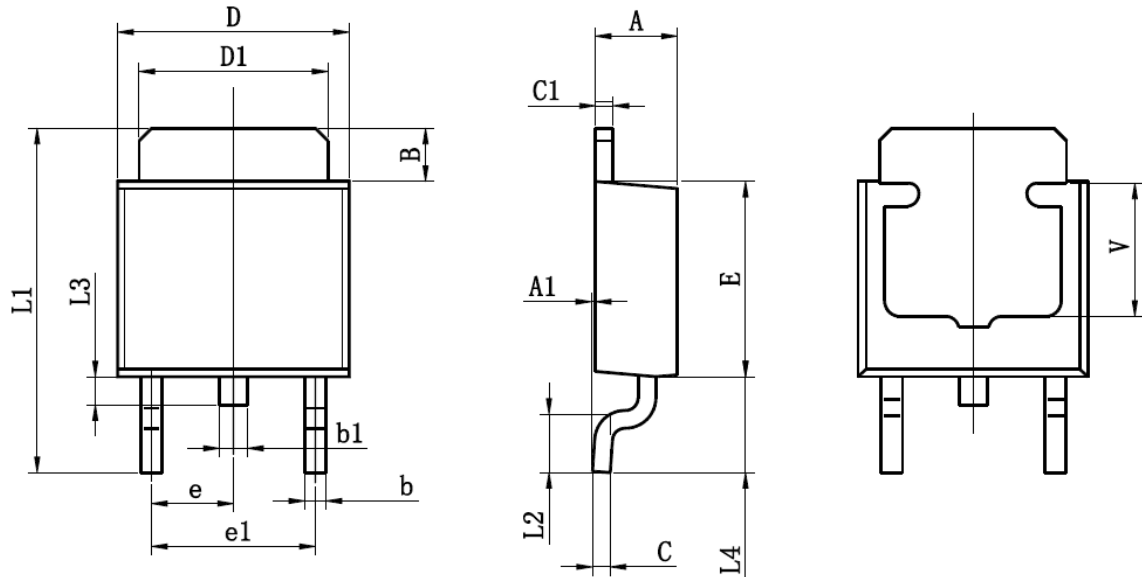


Fig. 11 - Maximum Effective Transient Thermal Impedance, Junction-to-Case

PACKAGE OUTLINE SOP-8P


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300TYP		0.091TYP	
e1	4.500	4.700	0.177	0.185
L1	9.500	9.900	0.374	0.390
L2	1.400	1.780	0.055	0.070
L3	0.650	0.950	0.026	0.037
L4	2.550	2.900	0.100	0.114
V	3.80REF		0.150REF	