
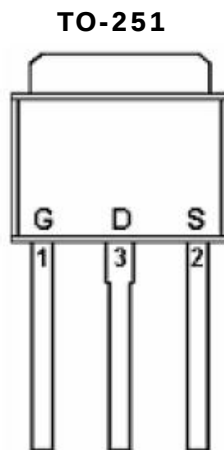


DESCRIPTION

ST13P10 is the P-Channel logic enhancement mode power field effect transistor which is produced using high cell density, DMOS trench technology. The ST13P10 has been designed specially to improve the overall efficiency of DC/DC converters using either synchronous or conventional switching PWM controllers. It has been optimized for low gate charge, low $R_{DS(ON)}$ and fast switching speed.



PIN CONFIGURATION (D-PAK)



FEATURE

- | -100V/-13.0A, $R_{DS(ON)} = 130m\Omega$
@ $V_{GS} = -10V$
- | Super high density cell design for extremely low $R_{DS(ON)}$
- | Exceptional on-resistance and maximum DC current capability
- | TO-252, TO-251 package design

PART MARKING

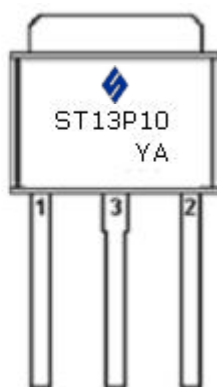

Y: Year Code A: Process Code



ST13P10
P Channel Enhancement Mode MOSFET



-13.0A

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C Unless otherwise noted)

Parameter		Symbol	Typical	Unit
Drain-Source Voltage		VDSS	-100	V
Gate-Source Voltage		VGSS	±20	V
Continuous Drain Current (TJ=150°C)	TA=25°C TA=100°C	ID	-13.0 -8.2	A
Pulsed Drain Current		IDM	-52	A
Continuous Source Current (Diode Conduction)		IS	-13	A
Power Dissipation	TA=25°C	PD	66	W
Operation Junction Temperature		TJ	150	°C
Storage Temperature Range		TSTG	-55/150	°C
Thermal Resistance-Junction to Ambient		RθJA	110	°C /W

STANSON TECHNOLOGY
120 Bentley Square, Mountain View, Ca 94040 USA
www.stansontech.com

Copyright © 2009, Stanson Corp.
ST13P10 2009. V1


ST13P10

P Channel Enhancement Mode MOSFET
-13.0A
ELECTRICAL CHARACTERISTICS (Ta = 25°C Unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Static						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=-250\mu A$	-100			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\mu A$	-2.0		-4.0	V
Gate Leakage Current	I_{GSS}	$V_{DS}=0V, V_{GS}=\pm 20V$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=-100V, V_{GS}=0V$			-25	uA
		$V_{DS}=-80V, V_{GS}=0V$ $T_J=150^{\circ}C$			-250	
On-State Drain Current	$I_{D(on)}$	$V_{DS}\geq -10V, V_{GS}=-5V$	-52			A
Drain-source On-Resistance	$R_{DS(on)}$	$V_{GS}=-10V, I_D=-13A$		115	130	mΩ
Forward Transconductance	g_{fs}	$V_{DS}=-50V, I_D=-7.8A$	3.2			S
Diode Forward Voltage	V_{SD}	$I_S=-7.8A, V_{GS}=0V$			-1.6	V
Dynamic						
Total Gate Charge	Q_g	$V_{DS}=-80V, V_{GS}=-10V$ $I_D=-8.4A$			58	nC
Gate-Source Charge	Q_{gs}				8.3	
Gate-Drain Charge	Q_{gd}				32	
Input Capacitance	C_{iss}	$V_{DS}=-25V, V_{GS}=0V$ $F=1MHz$		760		pF
Output Capacitance	C_{oss}			260		
Reverse TransferCapacitance	C_{rss}			170		
Turn-On Time	$t_{d(on)}$ t_r	$V_{GS}=-10V, V_{DD}=-50V$ $R_D=6.2\Omega, R_G=9.1\Omega$		15		nS
Turn-Off Time	$t_{d(off)}$ t_f			58		
				45		
				46		

STANSON TECHNOLOGY
 120 Bentley Square, Mountain View, Ca 94040 USA
www.stansontech.com

Copyright © 2009, Stanson Corp.
 ST13P10 2009. V1

TYPICAL CHARACTERISTICS

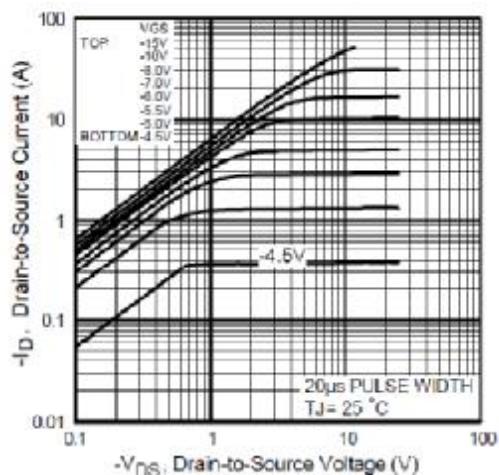


Fig 1. Typical Output Characteristics

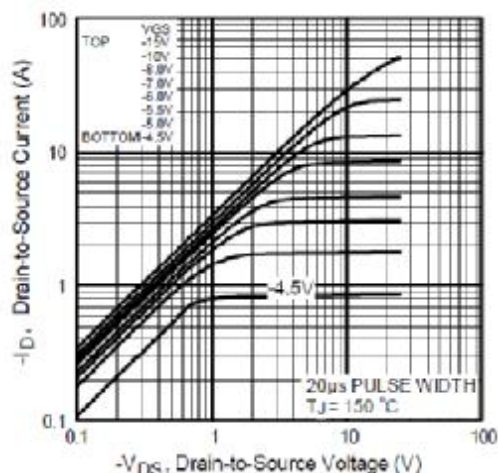


Fig 2. Typical Output Characteristics

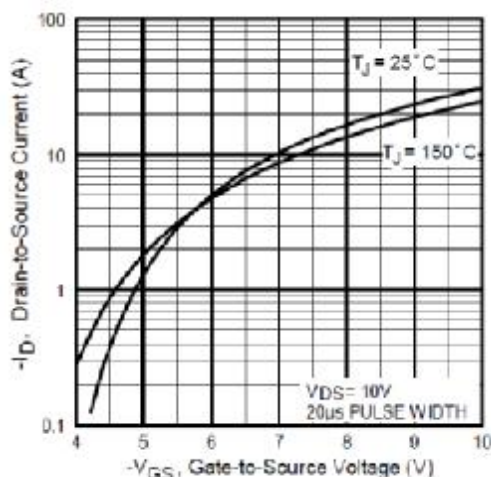


Fig 3. Typical Transfer Characteristics

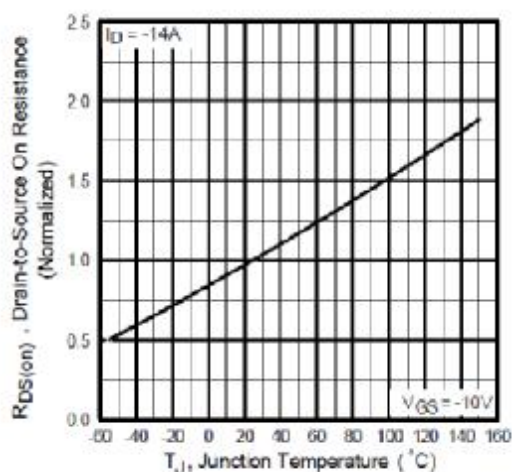


Fig 4. Normalized On-Resistance Vs. Temperature

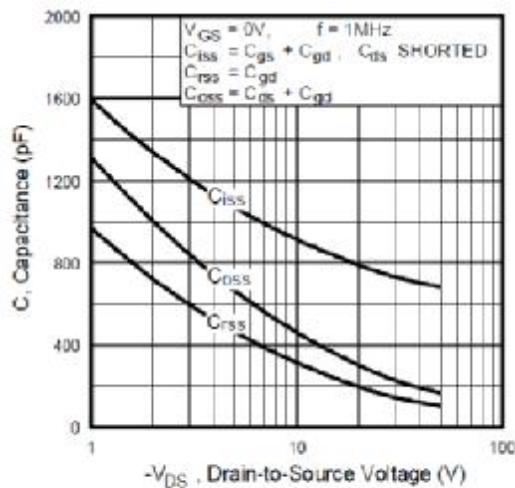


Fig 5. Typical Capacitance Vs.
Drain-to-Source Voltage

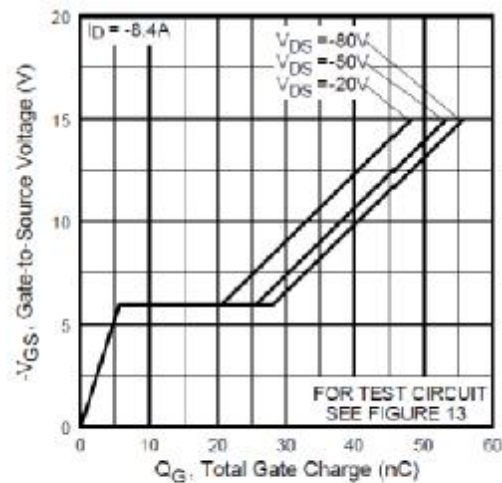
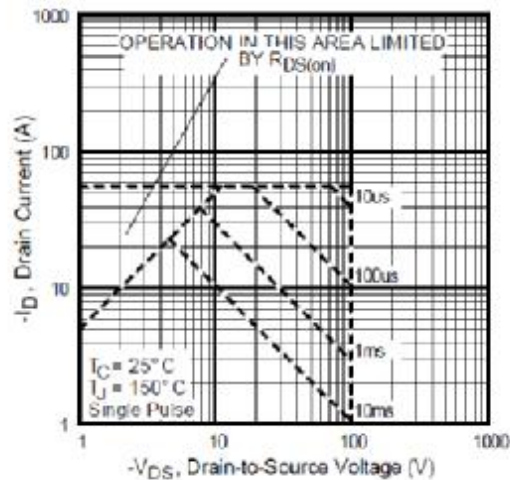
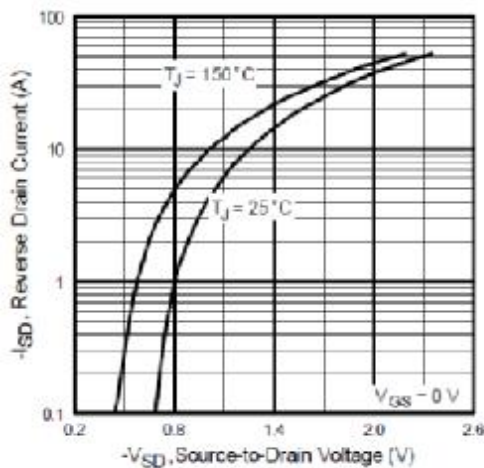


Fig 6. Typical Gate Charge Vs.
Gate-to-Source Voltage



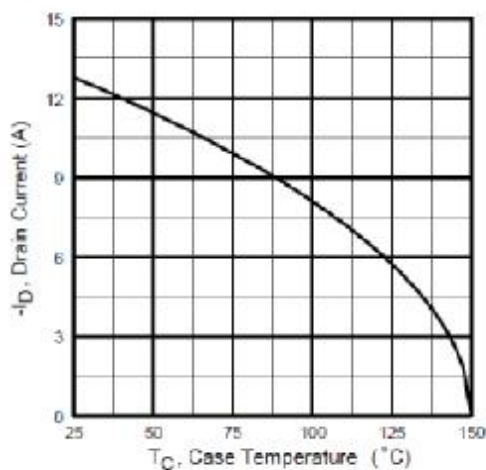


Fig 9. Maximum Drain Current Vs. Case Temperature

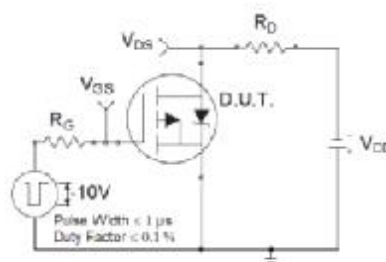


Fig 10a. Switching Time Test Circuit

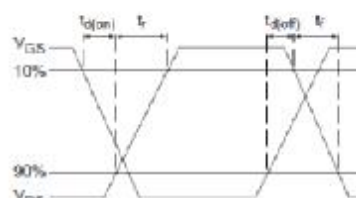


Fig 10b. Switching Time Waveforms

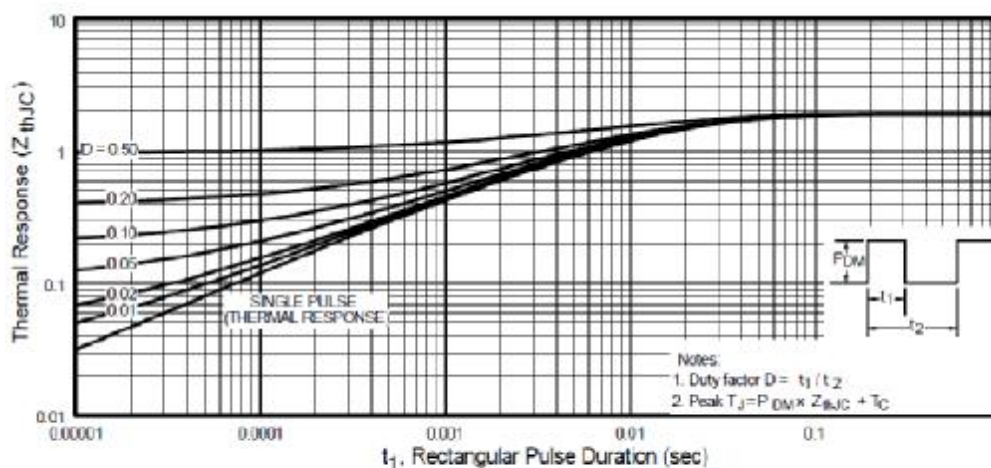


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

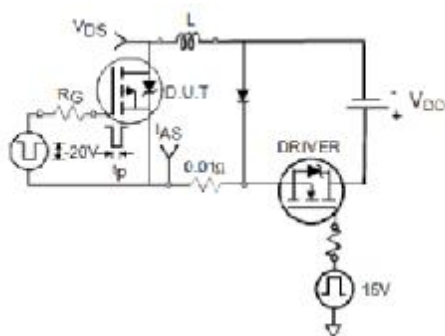


Fig 12a. Unclamped Inductive Test Circuit

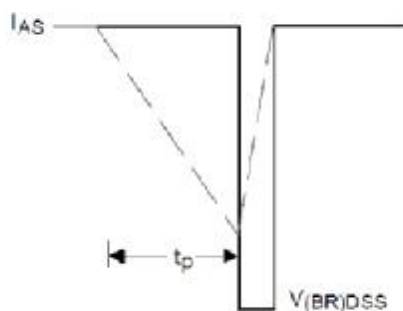


Fig 12b. Unclamped Inductive Waveforms

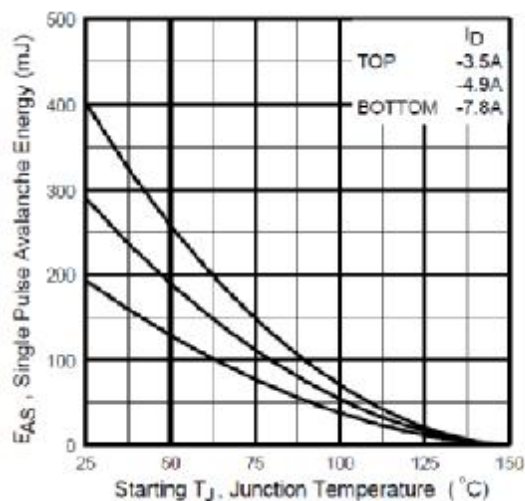


Fig 12c. Maximum Avalanche Energy Vs. Drain Current

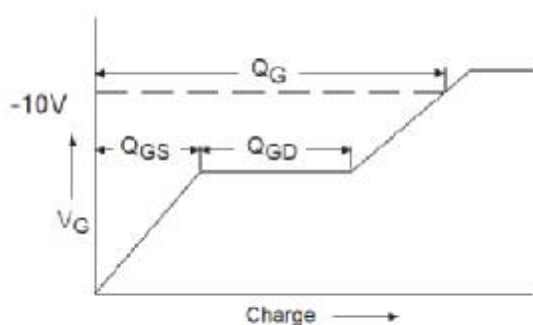


Fig 13a. Basic Gate Charge Waveform


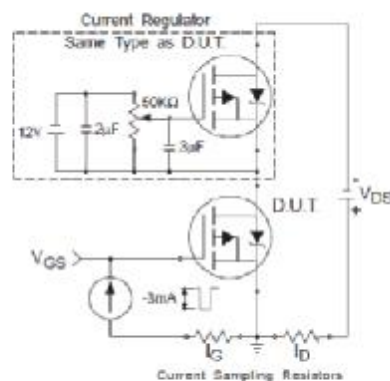



Fig 13b. Gate Charge Test Circuit

TO-252-2L PACKAGE OUTLINE SOP-8P

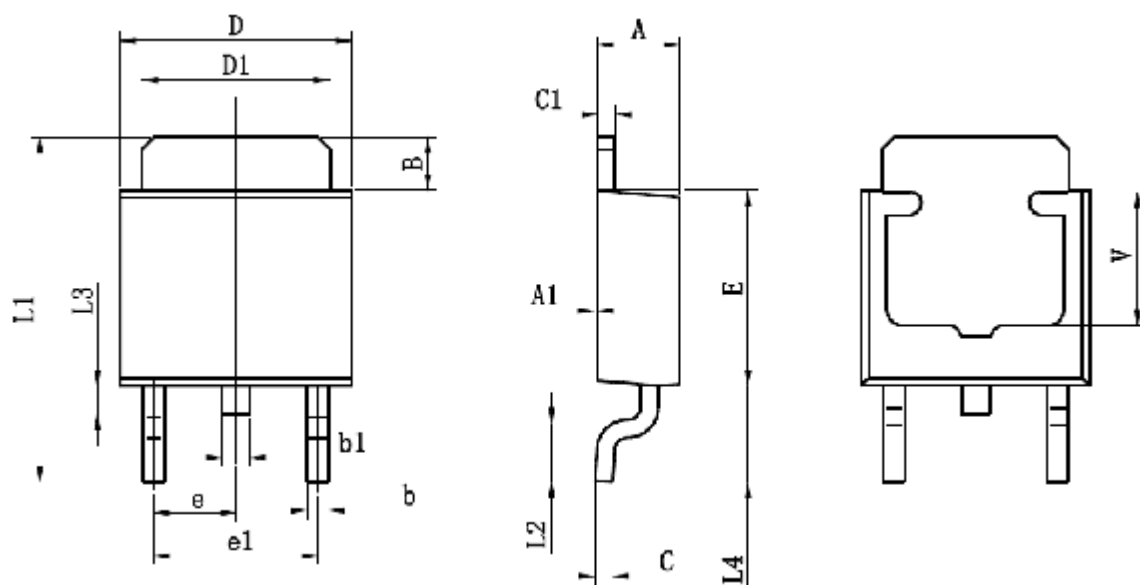

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300TYP		0.091TYP	
e1	4.500	4.700	0.177	0.185
L1	9.500	9.900	0.374	0.390
L2	1.400	1.780	0.055	0.070
L3	0.650	0.950	0.026	0.037
L4	2.550	2.900	0.100	0.114
V	3.80REF		0.150REF	

TO-251 PACKAGE OUTLINE SOP-8P

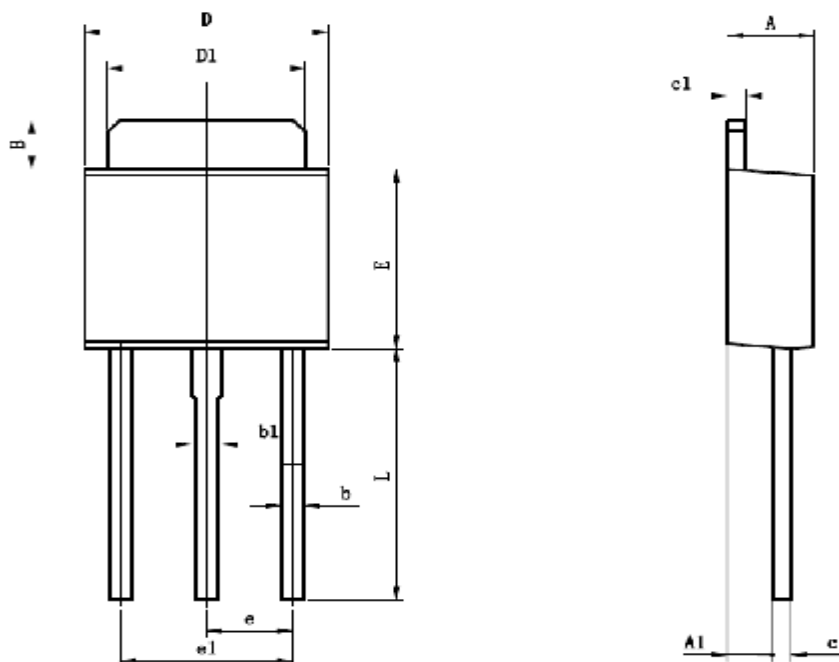

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	1.020	1.270	0.040	0.050
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300TYP		0.091TYP	
e1	4.500	4.700	0.177	0.185
L	7.500	7.900	0.295	0.311