


## Typ ST30..

- 7,62 mm pin spacing
- 2 .. 16-poles single mold
- horizontal header
- selective loading possible
- not to be connected or disconnected under electrical load
- open end

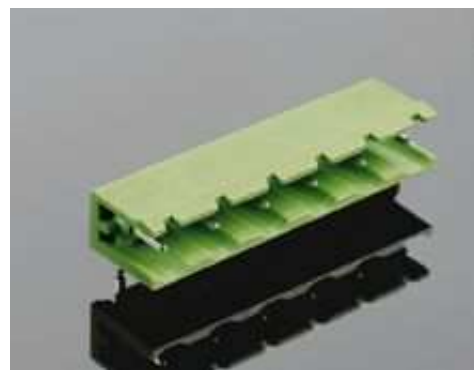

|                       |  |                                 |
|-----------------------|--|---------------------------------|
| Rated voltage         | <b>cULus</b><br>300 V  | <b>VDE</b><br>400 V             |
| Rated current         | 15 A   | 12 A                            |
| Rated impulse voltage |  | 6 kV                            |
| Pollution degree      |  | 3                               |
| <b>Dimensions</b>     | Spacing<br>PCB hole diameter                                   | 7,62 mm<br>1,4 mm               |
| <b>Materials</b>      | Insulating material<br>Flammability class<br>Temperature range | PA<br>UL 94 V-0<br>-30°C/+105°C |
| <b>Colour</b>         | Contact pin<br>RAL 6018  | Cu<br>green                     |

### Dimensions

