



# STD3LN62K3, STF3LN62K3 STP3LN62K3, STU3LN62K3

N-channel 620 V, 2.5  $\Omega$ , 2.5 A SuperMESH3™ Power MOSFET  
DPAK, TO-220FP, TO-220, IPAK

## Features

| Order codes | V <sub>DSS</sub> | R <sub>DS(on)</sub><br>max | I <sub>D</sub>       | P <sub>D</sub> |
|-------------|------------------|----------------------------|----------------------|----------------|
| STD3LN62K3  | 620 V            | < 3 $\Omega$               | 2.5 A                | 45 W           |
| STF3LN62K3  |                  |                            | 2.5 A <sup>(1)</sup> | 20 W           |
| STP3LN62K3  |                  |                            | 2.5 A                | 45 W           |
| STU3LN62K3  |                  |                            | 2.5 A                | 45 W           |

1. Limited by package

- 100% avalanche tested
- Extremely high dv/dt capability
- Very low intrinsic capacitance
- Improved diode reverse recovery characteristics
- Zener-protected

## Application

Switching applications

## Description

These devices are made using the SuperMESH3™ Power MOSFET technology that is obtained via improvements applied to STMicroelectronics' SuperMESH™ technology combined with a new optimized vertical structure. The resulting product has an extremely low on resistance, superior dynamic performance and high avalanche capability, making it especially suitable for the most demanding applications.

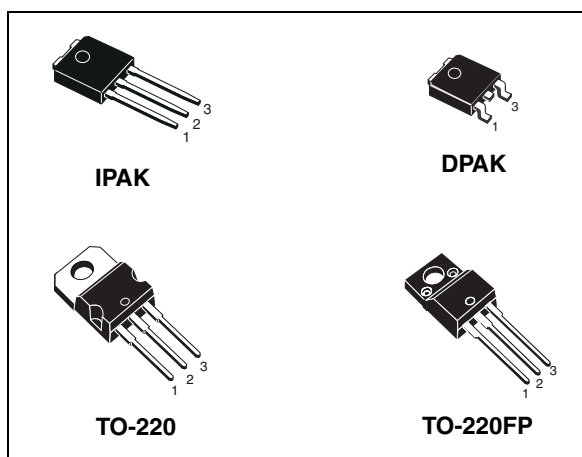


Figure 1. Internal schematic diagram

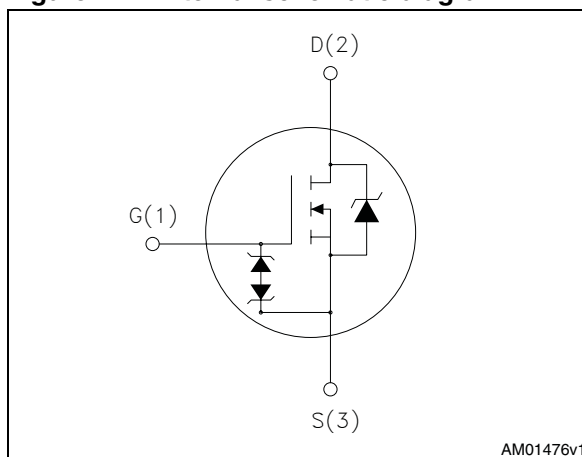


Table 1. Device summary

| Order codes | Marking | Package  | Packaging     |
|-------------|---------|----------|---------------|
| STD3LN62K3  | 3LN62K3 | DPAK     | Tape and reel |
| STF3LN62K3  |         | TO-220FP | Tube          |
| STP3LN62K3  |         | TO-220   |               |
| STU3LN62K3  |         | IPAK     |               |

Contents

1      **Electrical ratings** ..... 3

2      **Electrical characteristics** ..... 4

      2.1    Electrical characteristics (curves) ..... 6

3      **Test circuits** ..... 9

4      **Package mechanical data** ..... 10

5      **Packaging mechanical data** ..... 18

6      **Revision history** ..... 20



# 1 Electrical ratings

**Table 2. Absolute maximum ratings**

| Symbol                  | Parameter                                                                                                                       | Value      |             |                    | Unit                  |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------|------------|-------------|--------------------|-----------------------|
|                         |                                                                                                                                 | TO-220     | PAK<br>IPAK | TO-220FP           |                       |
| $V_{DS}$                | Drain-source voltage ( $V_{GS} = 0$ )                                                                                           | 620        |             |                    | V                     |
| $V_{GS}$                | Gate- source voltage                                                                                                            | $\pm 30$   |             |                    | V                     |
| $I_D$                   | Drain current (continuous) at $T_C = 25\text{ }^{\circ}\text{C}$                                                                | 2.5        |             | 2.5 <sup>(1)</sup> | A                     |
| $I_D$                   | Drain current (continuous) at $T_C = 100\text{ }^{\circ}\text{C}$                                                               | 1.6        |             | 1.6 <sup>(1)</sup> | A                     |
| $I_{DM}$ <sup>(2)</sup> | Drain current (pulsed)                                                                                                          | 10         |             | 10 <sup>(1)</sup>  | A                     |
| $P_{TOT}$               | Total dissipation at $T_C = 25\text{ }^{\circ}\text{C}$                                                                         | 45         |             | 20                 | W                     |
|                         | Derating factor                                                                                                                 | 0.36       |             | 0.16               | W/ $^{\circ}\text{C}$ |
| $V_{ESD(G-S)}$          | Gate source ESD<br>(HBM-C = 100 pF, R = 1.5 k $\Omega$ )                                                                        | 2500       |             |                    | V                     |
| $dv/dt$ <sup>(3)</sup>  | Peak diode recovery voltage slope                                                                                               | 12         |             |                    | V/ns                  |
| $V_{ISO}$               | Insulation withstand voltage (RMS) from all three leads to external heat sink<br>(t = 1 s; $T_C = 25\text{ }^{\circ}\text{C}$ ) | 2500       |             |                    | V                     |
| $T_{stg}$               | Storage temperature                                                                                                             | -55 to 150 |             |                    | $^{\circ}\text{C}$    |
| $T_j$                   | Max. operating junction temperature                                                                                             | 150        |             |                    | $^{\circ}\text{C}$    |

1. Limited by package

2. Pulse width limited by safe operating area

3.  $I_{SD} \leq 2.5\text{ A}$ ,  $di/dt \leq 400\text{ A}/\mu\text{s}$ , peak  $V_{DS} < V_{(BR)DSS}$ ,  $V_{DD} = 80\% V_{(BR)DSS}$ 
**Table 3. Thermal data**

| Symbol         | Parameter                                      | TO-220 | PAK<br>IPAK | TO-220FP | Unit                        |
|----------------|------------------------------------------------|--------|-------------|----------|-----------------------------|
| $R_{thj-case}$ | Thermal resistance junction-case max           | 2.78   |             | 6.25     | $^{\circ}\text{C}/\text{W}$ |
| $R_{thj-pcb}$  | Thermal resistance junction-pcb max            |        | 50          |          | $^{\circ}\text{C}/\text{W}$ |
| $R_{thj-amb}$  | Thermal resistance junction-amb max            | 62.5   | 100         | 62.5     | $^{\circ}\text{C}/\text{W}$ |
| $T_l$          | Maximum lead temperature for soldering purpose | 300    |             | 300      | $^{\circ}\text{C}$          |

**Table 4. Avalanche characteristics**

| Symbol   | Parameter                                                                                                                 | Max value | Unit |
|----------|---------------------------------------------------------------------------------------------------------------------------|-----------|------|
| $I_{AR}$ | Avalanche current, repetitive or not-repetitive<br>(pulse width limited by $T_j$ max)                                     | 2.5       | A    |
| $E_{AS}$ | Single pulse avalanche energy<br>(starting $T_j = 25\text{ }^{\circ}\text{C}$ , $I_D = I_{AR}$ , $V_{DD} = 50\text{ V}$ ) | 90        | mJ   |

## 2 Electrical characteristics

( $T_C = 25\text{ °C}$  unless otherwise specified)

**Table 5. On /off states**

| Symbol        | Parameter                                        | Test conditions                                                                      | Min. | Typ. | Max.     | Unit                           |
|---------------|--------------------------------------------------|--------------------------------------------------------------------------------------|------|------|----------|--------------------------------|
| $V_{(BR)DSS}$ | Drain-source breakdown voltage                   | $I_D = 1\text{ mA}$ , $V_{GS} = 0$                                                   | 620  |      |          | V                              |
| $I_{DSS}$     | Zero gate voltage drain current ( $V_{GS} = 0$ ) | $V_{DS} = \text{Max rating}$<br>$V_{DS} = \text{Max rating}$ , $T_C = 125\text{ °C}$ |      |      | 1<br>50  | $\mu\text{A}$<br>$\mu\text{A}$ |
| $I_{GSS}$     | Gate-body leakage current ( $V_{DS} = 0$ )       | $V_{GS} = \pm 20\text{ V}$                                                           |      |      | $\pm 10$ | $\mu\text{A}$                  |
| $V_{GS(th)}$  | Gate threshold voltage                           | $V_{DS} = V_{GS}$ , $I_D = 50\text{ }\mu\text{A}$                                    | 3    | 3.75 | 4.5      | V                              |
| $R_{DS(on)}$  | Static drain-source on resistance                | $V_{GS} = 10\text{ V}$ , $I_D = 1.25\text{ A}$                                       |      | 2.5  | 3        | $\Omega$                       |

**Table 6. Dynamic**

| Symbol            | Parameter                      | Test conditions                                                                                                | Min. | Typ. | Max. | Unit     |
|-------------------|--------------------------------|----------------------------------------------------------------------------------------------------------------|------|------|------|----------|
| $C_{iss}$         | Input capacitance              | $V_{DS} = 50\text{ V}$ , $f = 1\text{ MHz}$ , $V_{GS} = 0$                                                     | -    | 386  | -    | pF       |
| $C_{oss}$         | Output capacitance             |                                                                                                                |      | 30   |      | pF       |
| $C_{rss}$         | Reverse transfer capacitance   |                                                                                                                |      | 5    |      | pF       |
| $C_{o(tr)}^{(1)}$ | Eq. capacitance time related   | $V_{GS} = 0$ , $V_{DS} = 0\text{ to }496\text{ V}$                                                             | -    | 20   | -    | pF       |
| $C_{o(er)}^{(2)}$ | Eq. capacitance energy related |                                                                                                                | -    | 28   | -    | pF       |
| $R_G$             | Intrinsic gate resistance      | $f = 1\text{ MHz}$ open drain                                                                                  | -    | 7    | -    | $\Omega$ |
| $Q_g$             | Total gate charge              | $V_{DD} = 496\text{ V}$ , $I_D = 2.5\text{ A}$ ,<br>$V_{GS} = 10\text{ V}$<br>(see <a href="#">Figure 20</a> ) | -    | 17   | -    | nC       |
| $Q_{gs}$          | Gate-source charge             |                                                                                                                |      | 2.7  |      | nC       |
| $Q_{gd}$          | Gate-drain charge              |                                                                                                                |      | 10.7 |      | nC       |

1.  $C_{oss\text{ eq.}}$  time related is defined as a constant equivalent capacitance giving the same charging time as  $C_{oss}$  when  $V_{DS}$  increases from 0 to 80%  $V_{DSS}$

2.  $C_{oss\text{ eq.}}$  energy related is defined as a constant equivalent capacitance giving the same stored energy as  $C_{oss}$  when  $V_{DS}$  increases from 0 to 80%  $V_{DSS}$

**Table 7. Switching times**

| Symbol       | Parameter           | Test conditions                                                                                                                       | Min. | Typ. | Max. | Unit |
|--------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------|------|------|------|------|
| $t_{d(on)}$  | Turn-on delay time  | $V_{DD} = 310\text{ V}$ , $I_D = 1.25\text{ A}$ ,<br>$R_G = 4.7\ \Omega$ , $V_{GS} = 10\text{ V}$<br>(see <a href="#">Figure 19</a> ) | -    | 9    | -    | ns   |
| $t_r$        | Rise time           |                                                                                                                                       |      | 7    |      | ns   |
| $t_{d(off)}$ | Turn-off-delay time |                                                                                                                                       |      | 30   |      | ns   |
| $t_f$        | Fall time           |                                                                                                                                       |      | 27   |      | ns   |

**Table 8. Source drain diode**

| Symbol          | Parameter                     | Test conditions                                                                                                                                                | Min. | Typ. | Max. | Unit |
|-----------------|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|------|
| $I_{SD}$        | Source-drain current          |                                                                                                                                                                | -    |      | 2.5  | A    |
| $I_{SDM}^{(1)}$ | Source-drain current (pulsed) |                                                                                                                                                                |      |      | 10   | A    |
| $V_{SD}^{(2)}$  | Forward on voltage            | $I_{SD} = 2.5\text{ A}$ , $V_{GS} = 0$                                                                                                                         | -    |      | 1.5  | V    |
| $t_{rr}$        | Reverse recovery time         | $I_{SD} = 2.5\text{ A}$ , $di/dt = 100\text{ A}/\mu\text{s}$<br>$V_{DD} = 60\text{ V}$ (see <a href="#">Figure 24</a> )                                        | -    | 240  |      | ns   |
| $Q_{rr}$        | Reverse recovery charge       |                                                                                                                                                                |      | 1200 |      | nC   |
| $I_{RRM}$       | Reverse recovery current      |                                                                                                                                                                |      | 10   |      | A    |
| $t_{rr}$        | Reverse recovery time         | $I_{SD} = 2.5\text{ A}$ , $di/dt = 100\text{ A}/\mu\text{s}$<br>$V_{DD} = 60\text{ V}$ , $T_j = 150\text{ }^\circ\text{C}$<br>(see <a href="#">Figure 24</a> ) | -    | 265  |      | ns   |
| $Q_{rr}$        | Reverse recovery charge       |                                                                                                                                                                |      | 1400 |      | nC   |
| $I_{RRM}$       | Reverse recovery current      |                                                                                                                                                                |      | 11   |      | A    |

1. Pulse width limited by safe operating area.

2. Pulsed: Pulse duration = 300  $\mu\text{s}$ , duty cycle 1.5%

**Table 9. Gate-source Zener diode**

| Symbol           | Parameter                     | Test conditions                         | Min. | Typ. | Max. | Unit |
|------------------|-------------------------------|-----------------------------------------|------|------|------|------|
| $BV_{GSO}^{(1)}$ | Gate-source breakdown voltage | $I_{gs} = \pm 1\text{ mA}$ (open drain) | 30   | -    |      | V    |

1. The built-in back-to-back Zener diodes have specifically been designed to enhance not only the device's ESD capability, but also to make them safely absorb possible voltage transients that may occasionally be applied from gate to source. In this respect the Zener voltage is appropriate to achieve an efficient and cost-effective intervention to protect the device's integrity. These integrated Zener diodes thus avoid the usage of external components.

## 2.1 Electrical characteristics (curves)

Figure 2. Safe operating area for TO-220

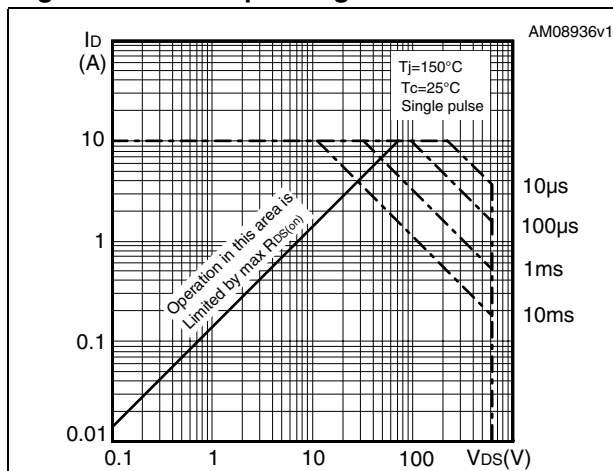


Figure 3. Thermal impedance for TO-220

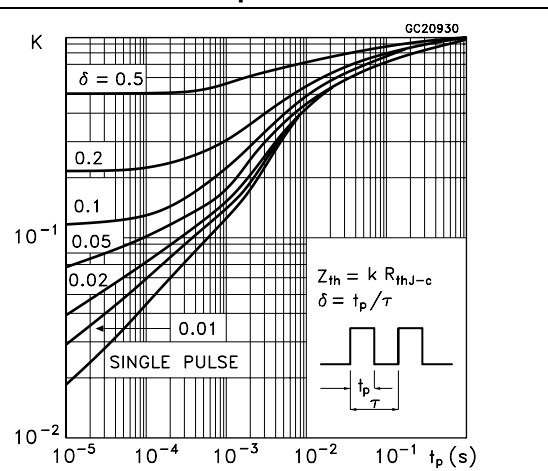


Figure 4. Safe operating area for TO-220FP

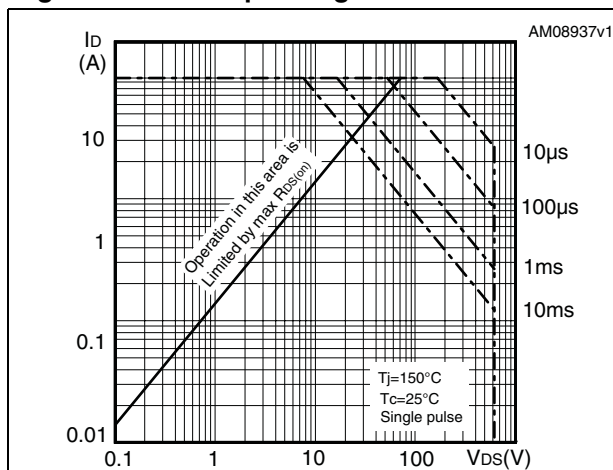


Figure 5. Thermal impedance for TO-220FP

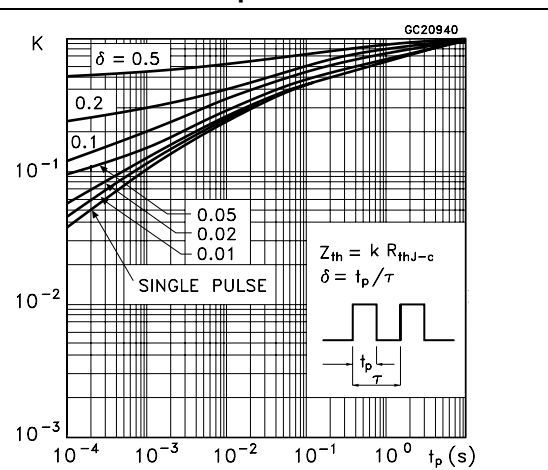


Figure 6. Safe operating area for DPAK, IPAK

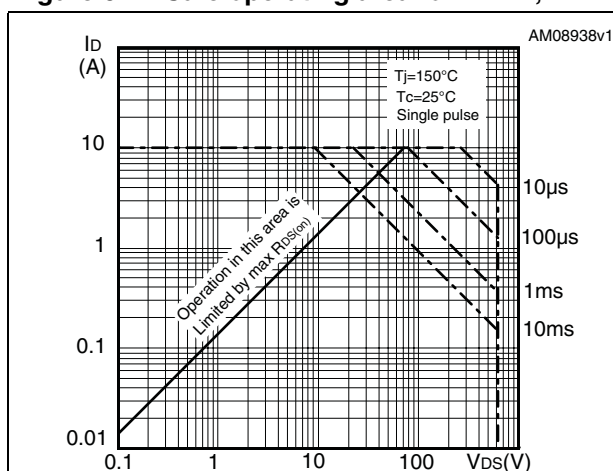


Figure 7. Thermal impedance for DPAK, IPAK

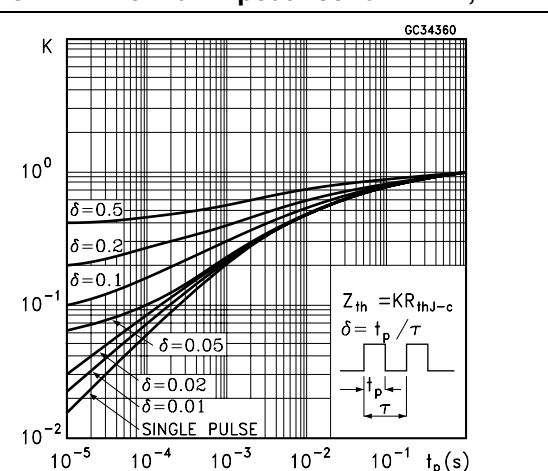


Figure 8. Output characteristics

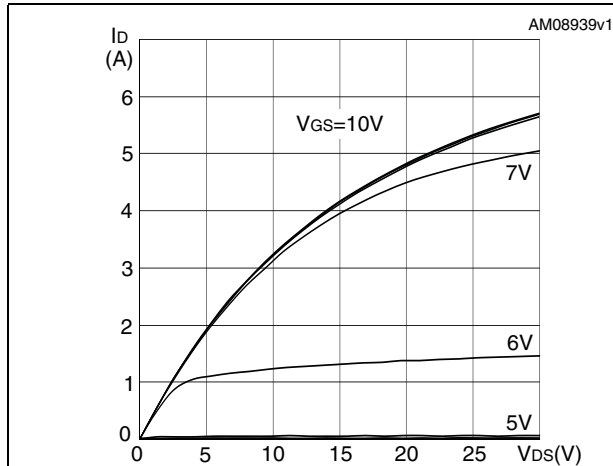


Figure 9. Transfer characteristics

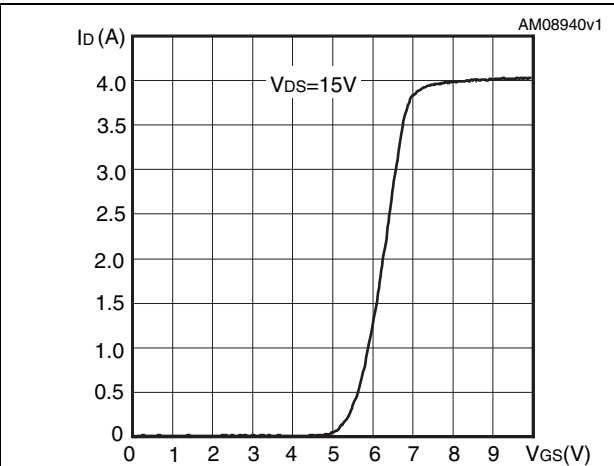


Figure 10. Gate charge vs gate-source voltage

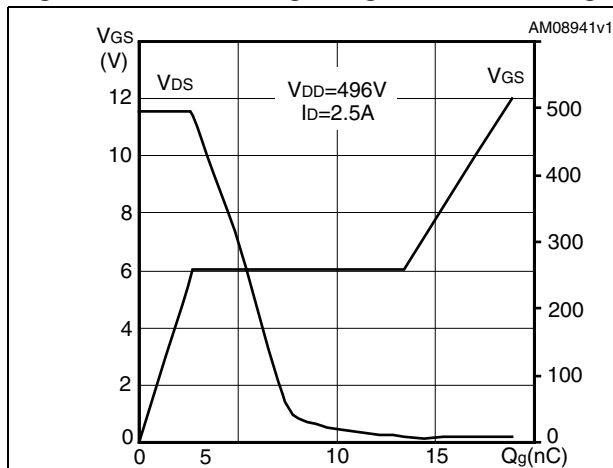


Figure 11. Static drain-source on resistance

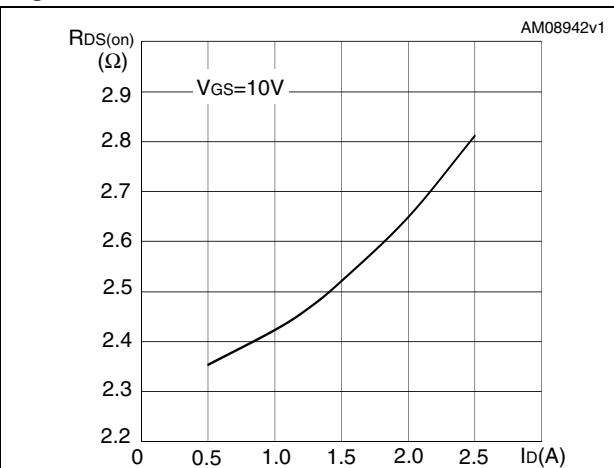


Figure 12. Capacitance variations

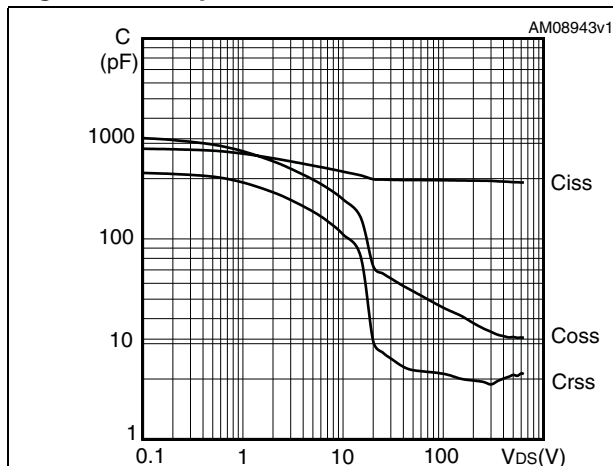


Figure 13. Output capacitance stored energy

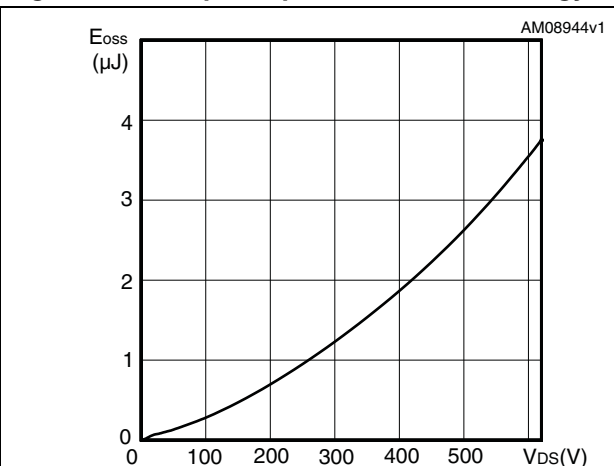


Figure 14. Normalized gate threshold voltage vs temperature

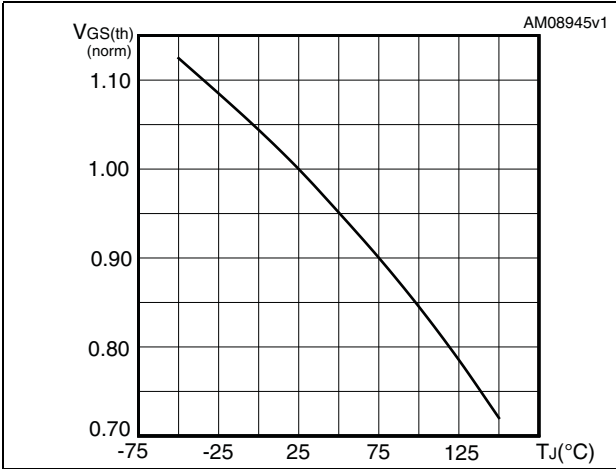


Figure 15. Normalized on resistance vs temperature

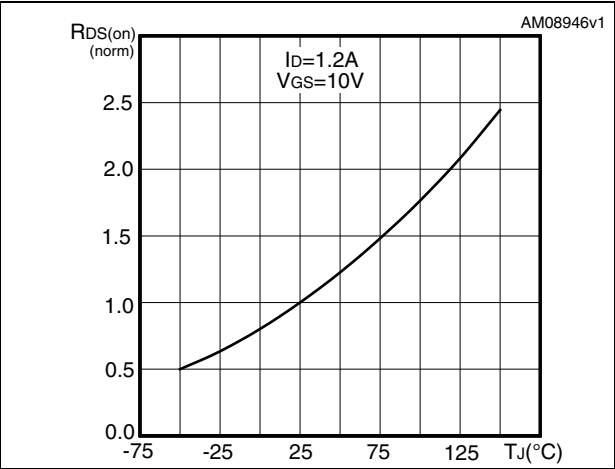


Figure 16. Normalized BV<sub>DSS</sub> vs temperature

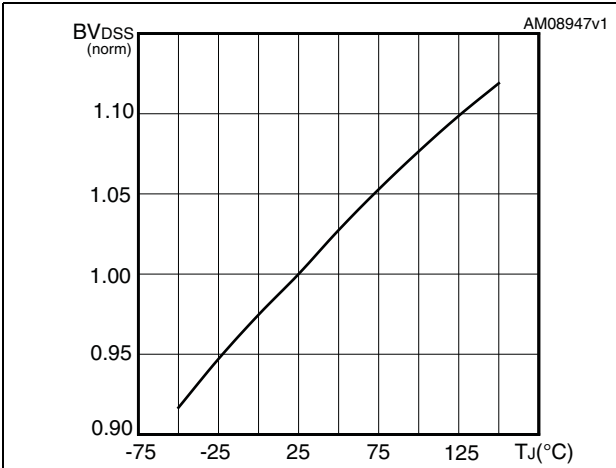


Figure 17. Source-drain diode forward characteristics


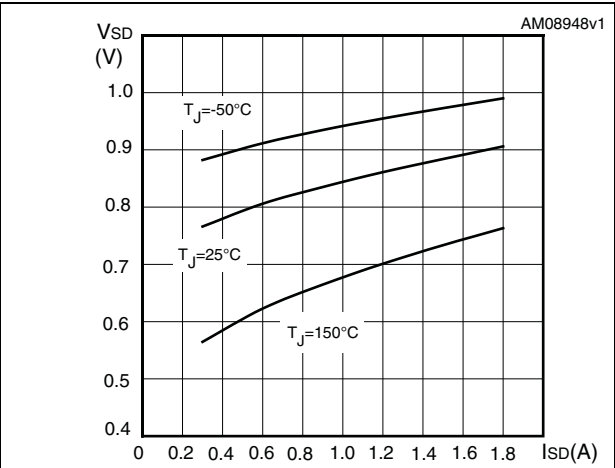



Figure 18. Maximum avalanche energy vs temperature



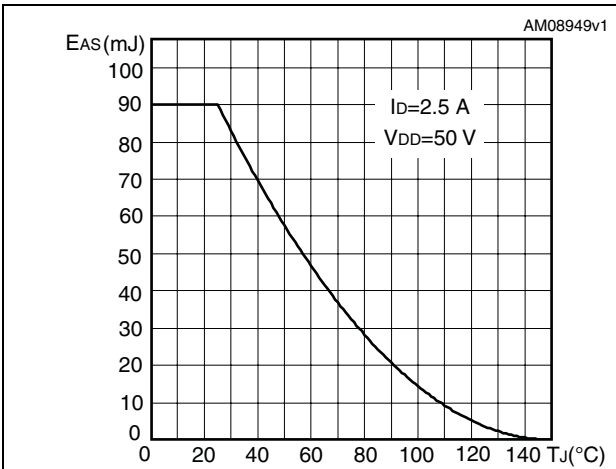


### 3 Test circuits


**Figure 19. Switching times test circuit for resistive load**

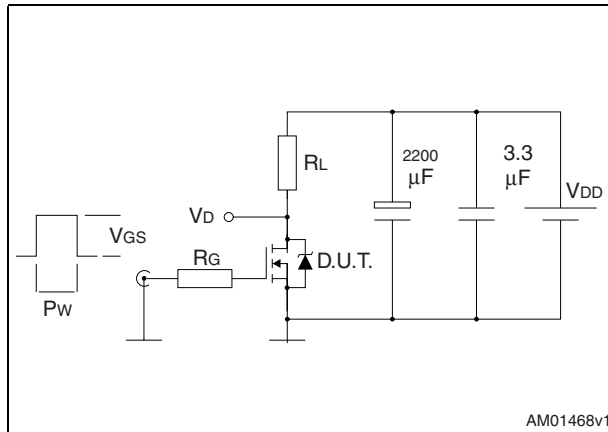


**Figure 20. Gate charge test circuit**

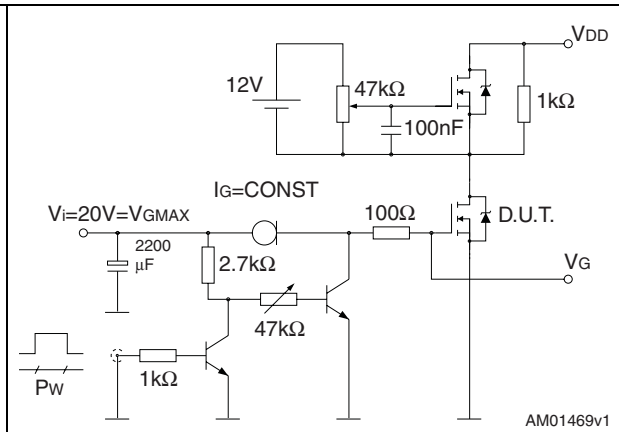


**Figure 21. Test circuit for inductive load switching and diode recovery times**

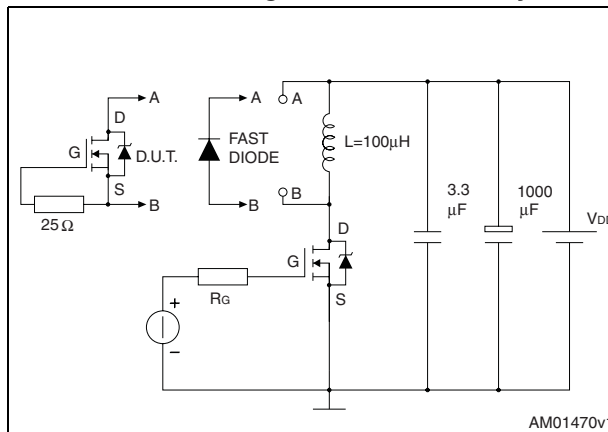


**Figure 22. Unclamped Inductive load test circuit**

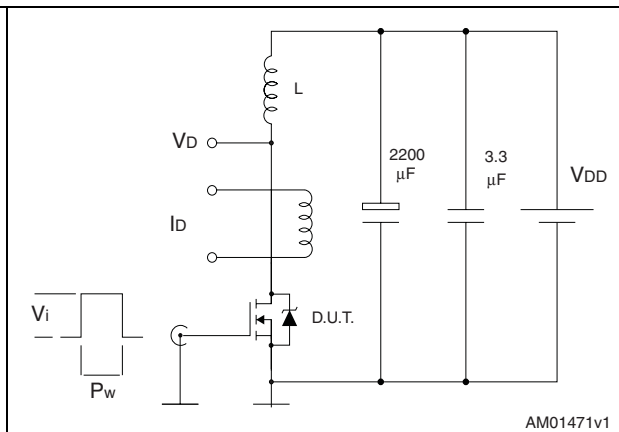

**Figure 23. Unclamped inductive waveform**

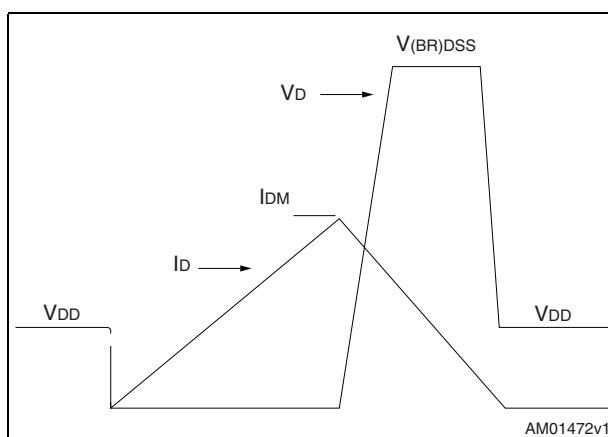

**Figure 24. Switching time waveform**

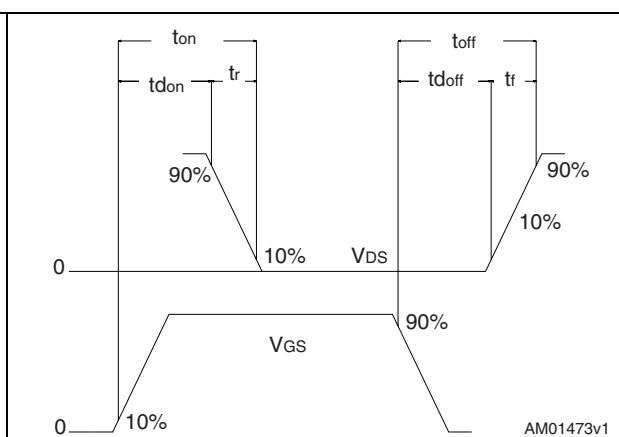

## 4      **Package mechanical data**

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

Table 10. DPAK (TO-252) mechanical data

| Dim. | mm   |      |       |
|------|------|------|-------|
|      | Min. | Typ. | Max.  |
| A    | 2.20 |      | 2.40  |
| A1   | 0.90 |      | 1.10  |
| A2   | 0.03 |      | 0.23  |
| b    | 0.64 |      | 0.90  |
| b4   | 5.20 |      | 5.40  |
| c    | 0.45 |      | 0.60  |
| c2   | 0.48 |      | 0.60  |
| D    | 6.00 |      | 6.20  |
| D1   |      | 5.10 |       |
| E    | 6.40 |      | 6.60  |
| E1   |      | 4.70 |       |
| e    |      | 2.28 |       |
| e1   | 4.40 |      | 4.60  |
| H    | 9.35 |      | 10.10 |
| L    | 1    |      |       |
| L1   |      | 2.80 |       |
| L2   |      | 0.80 |       |
| L4   | 0.60 |      | 1     |
| R    |      | 0.20 |       |
| V2   | 0°   |      | 8°    |

Figure 25. DPAK (TO-252) drawing

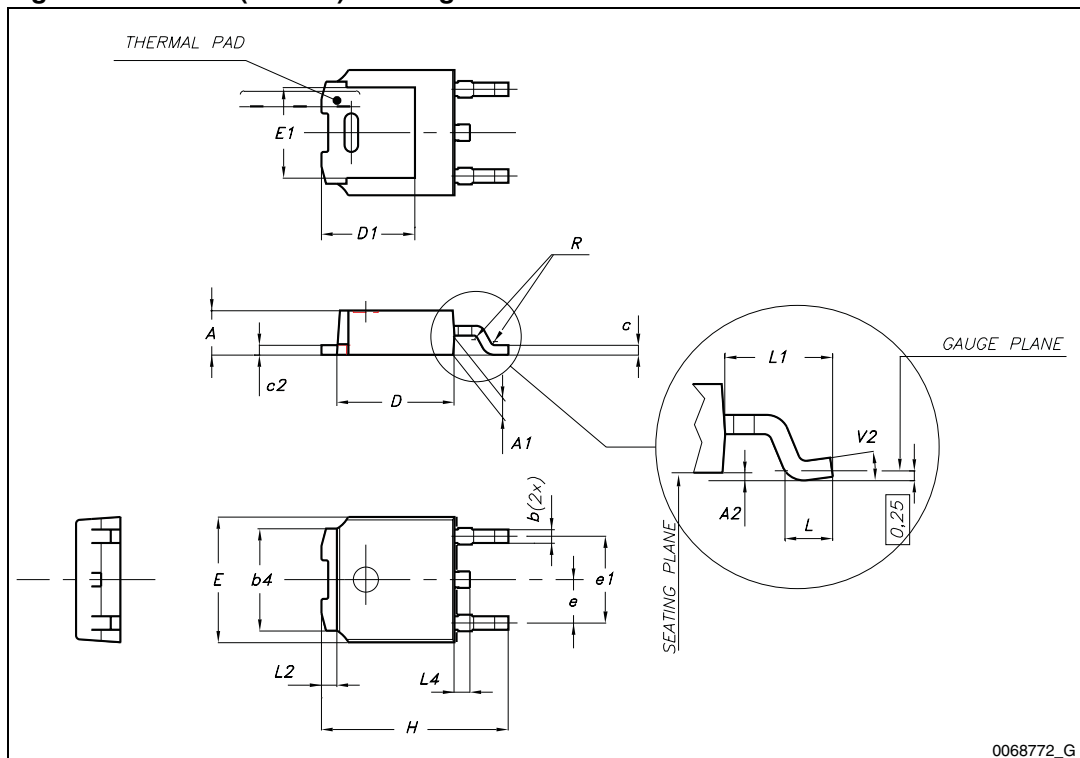


Table 11. IPAK (TO-251) mechanical data

| DIM. | mm.  |       |      |
|------|------|-------|------|
|      | min. | typ   | max. |
| A    | 2.20 |       | 2.40 |
| A1   | 0.90 |       | 1.10 |
| b    | 0.64 |       | 0.90 |
| b2   |      |       | 0.95 |
| b4   | 5.20 |       | 5.40 |
| B5   |      | 0.3   |      |
| c    | 0.45 |       | 0.60 |
| c2   | 0.48 |       | 0.60 |
| D    | 6.00 |       | 6.20 |
| E    | 6.40 |       | 6.60 |
| e    |      | 2.28  |      |
| e1   | 4.40 |       | 4.60 |
| H    |      | 16.10 |      |
| L    | 9.00 |       | 9.40 |
| L1   | 0.80 |       | 1.20 |
| L2   |      | 0.80  | 1.00 |
| V1   |      | 10 °  |      |

Figure 26. IPAK (TO-251) drawing

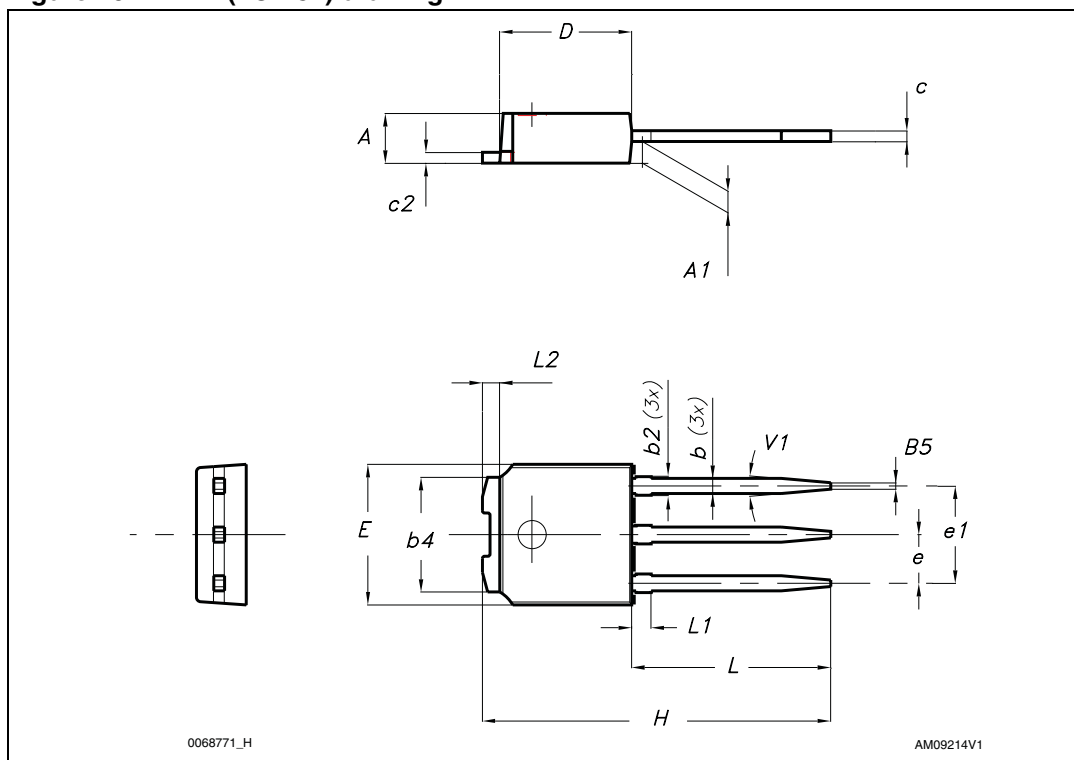


Table 12. TO-220 type A mechanical data

| Dim. | mm    |       |       |
|------|-------|-------|-------|
|      | Min.  | Typ.  | Max.  |
| A    | 4.40  |       | 4.60  |
| b    | 0.61  |       | 0.88  |
| b1   | 1.14  |       | 1.70  |
| c    | 0.48  |       | 0.70  |
| D    | 15.25 |       | 15.75 |
| D1   |       | 1.27  |       |
| E    | 10    |       | 10.40 |
| e    | 2.40  |       | 2.70  |
| e1   | 4.95  |       | 5.15  |
| F    | 1.23  |       | 1.32  |
| H1   | 6.20  |       | 6.60  |
| J1   | 2.40  |       | 2.72  |
| L    | 13    |       | 14    |
| L1   | 3.50  |       | 3.93  |
| L20  |       | 16.40 |       |
| L30  |       | 28.90 |       |
| ØP   | 3.75  |       | 3.85  |
| Q    | 2.65  |       | 2.95  |

Figure 27. TO-220 type A drawing


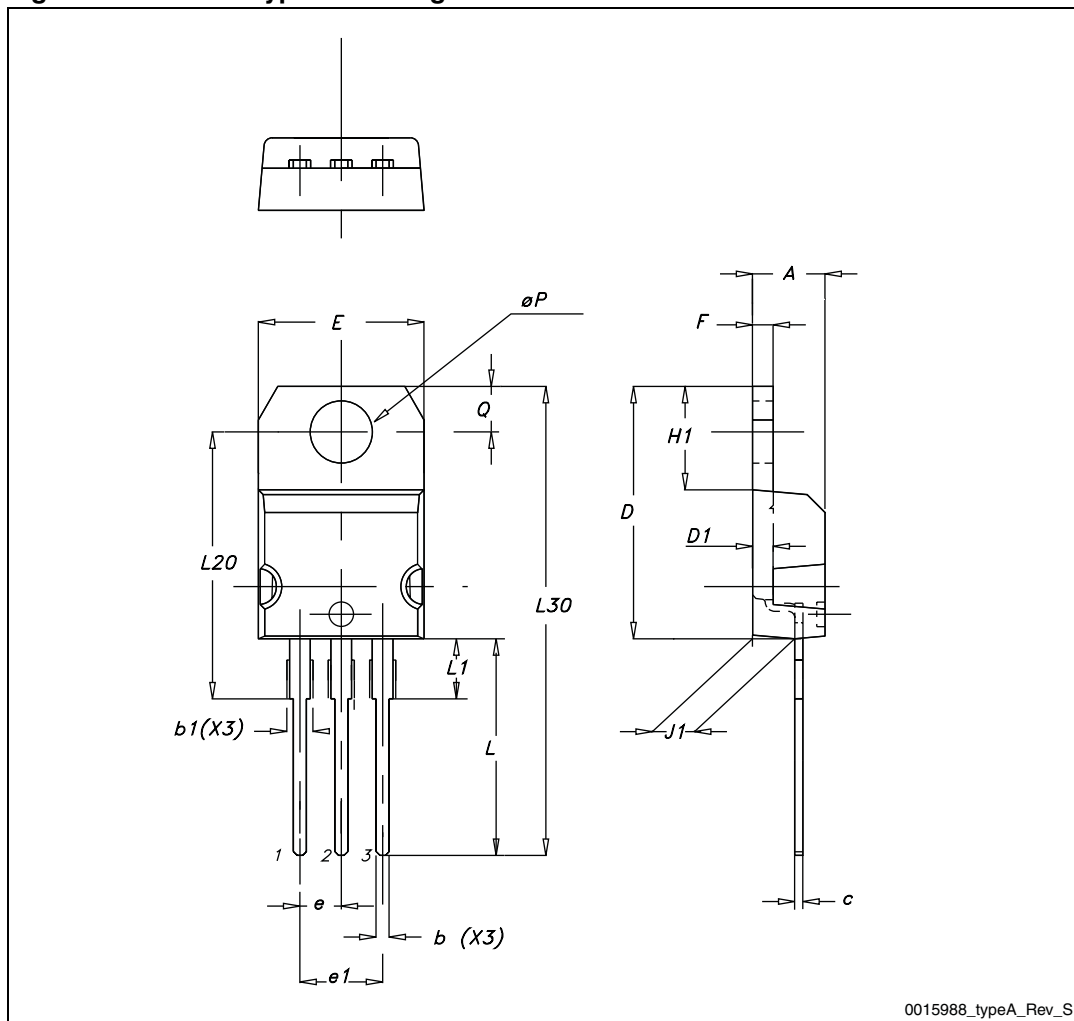




Table 13. TO-220FP mechanical data

| Dim. | mm   |      |      |
|------|------|------|------|
|      | Min. | Typ. | Max. |
| A    | 4.4  |      | 4.6  |
| B    | 2.5  |      | 2.7  |
| D    | 2.5  |      | 2.75 |
| E    | 0.45 |      | 0.7  |
| F    | 0.75 |      | 1    |
| F1   | 1.15 |      | 1.70 |
| F2   | 1.15 |      | 1.70 |
| G    | 4.95 |      | 5.2  |
| G1   | 2.4  |      | 2.7  |
| H    | 10   |      | 10.4 |
| L2   |      | 16   |      |
| L3   | 28.6 |      | 30.6 |
| L4   | 9.8  |      | 10.6 |
| L5   | 2.9  |      | 3.6  |
| L6   | 15.9 |      | 16.4 |
| L7   | 9    |      | 9.3  |
| Dia  | 3    |      | 3.2  |

Figure 28. TO-220FP drawing

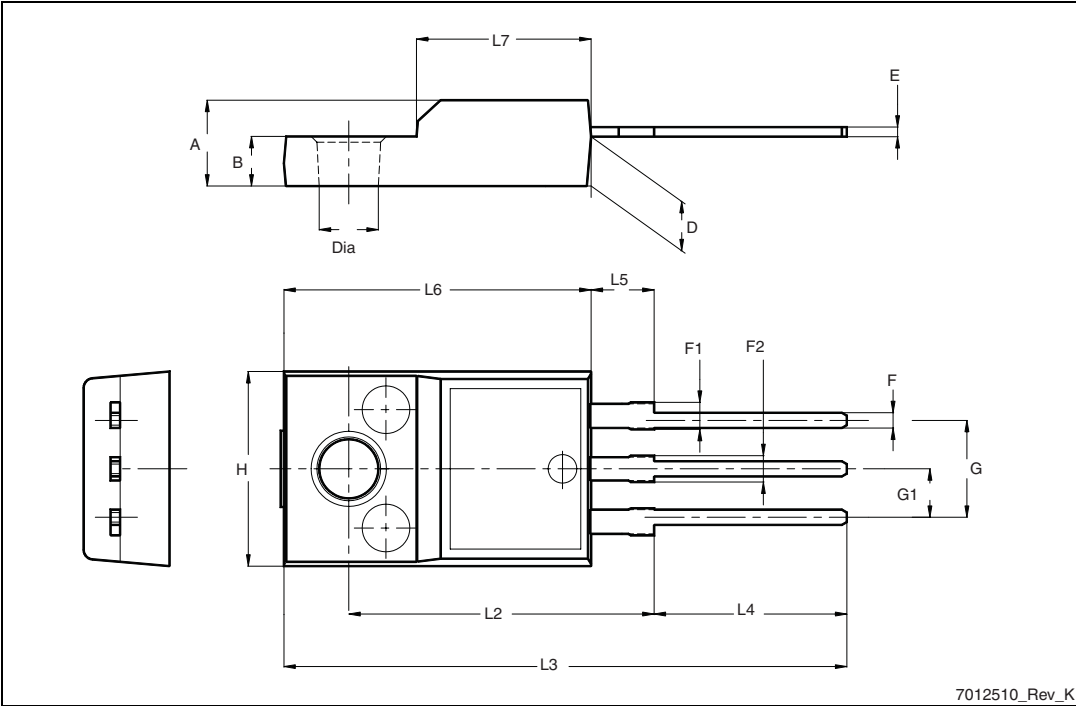


7012510\_Rev\_K

## 5 Packaging mechanical data

Table 14. DPAK (TO-252) tape and reel mechanical data

| Tape |      |      | Reel      |      |      |
|------|------|------|-----------|------|------|
| Dim. | mm   |      | Dim.      | mm   |      |
|      | Min. | Max. |           | Min. | Max. |
| A0   | 6.8  | 7    | A         |      | 330  |
| B0   | 10.4 | 10.6 | B         | 1.5  |      |
| B1   |      | 12.1 | C         | 12.8 | 13.2 |
| D    | 1.5  | 1.6  | D         | 20.2 |      |
| D1   | 1.5  |      | G         | 16.4 | 18.4 |
| E    | 1.65 | 1.85 | N         | 50   |      |
| F    | 7.4  | 7.6  | T         |      | 22.4 |
| K0   | 2.55 | 2.75 |           |      |      |
| P0   | 3.9  | 4.1  | Base qty. |      | 2500 |
| P1   | 7.9  | 8.1  | Bulk qty. |      | 2500 |
| P2   | 1.9  | 2.1  |           |      |      |
| R    | 40   |      |           |      |      |
| T    | 0.25 | 0.35 |           |      |      |
| W    | 15.7 | 16.3 |           |      |      |

Figure 29. DPAK footprint<sup>(a)</sup>

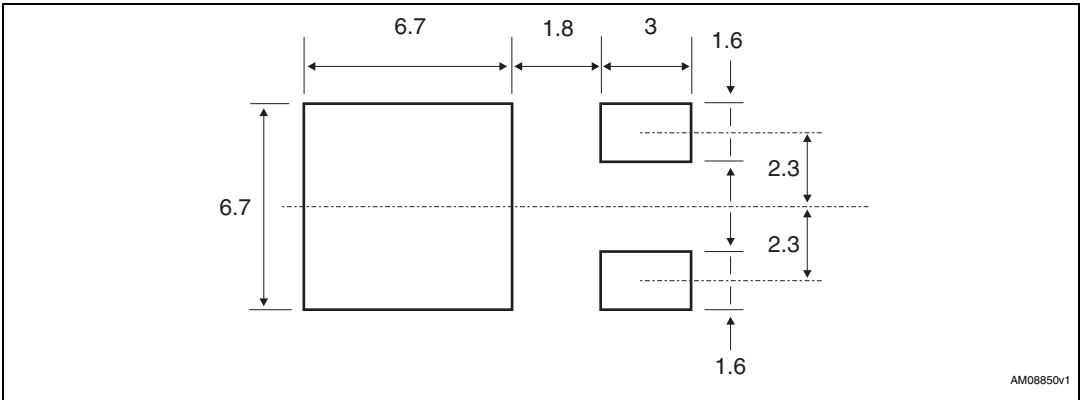

a. All dimension are in millimeters

Figure 30. Tape for DPAK (TO-252)


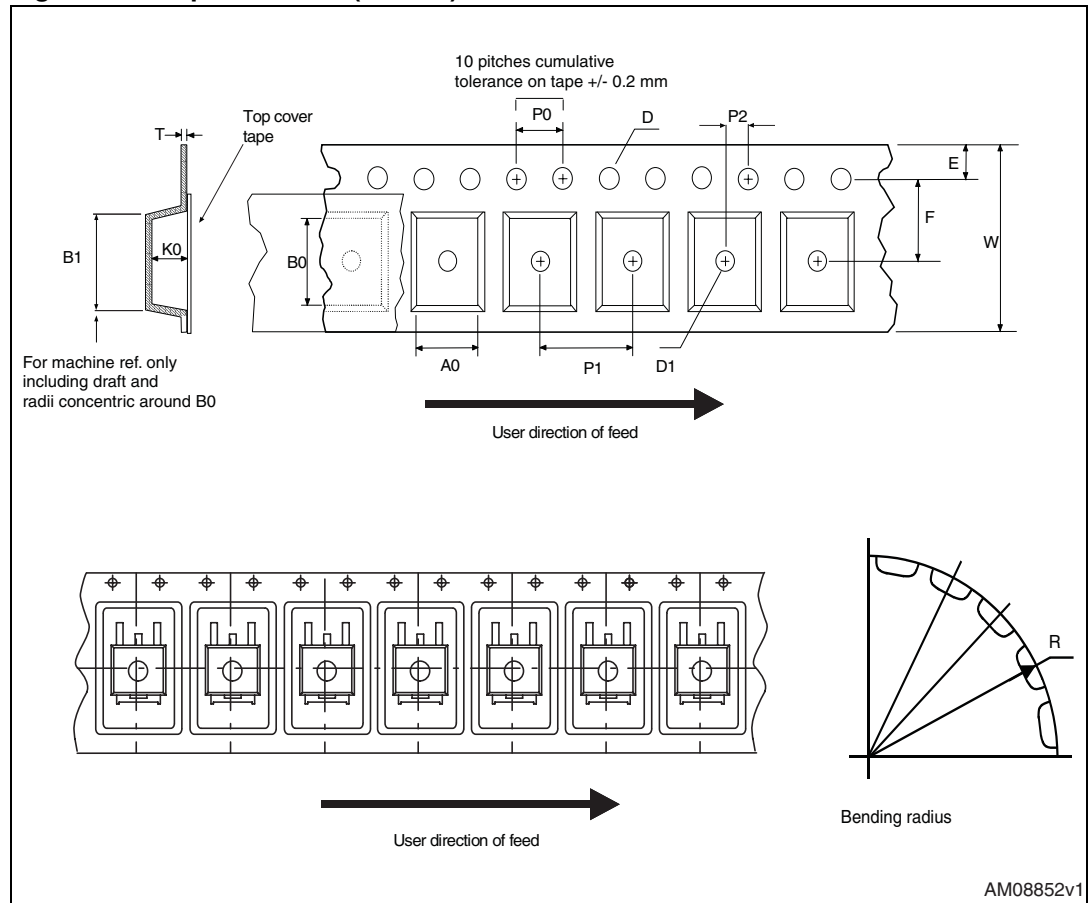


Figure 31. Reel for DPAK (TO-252)

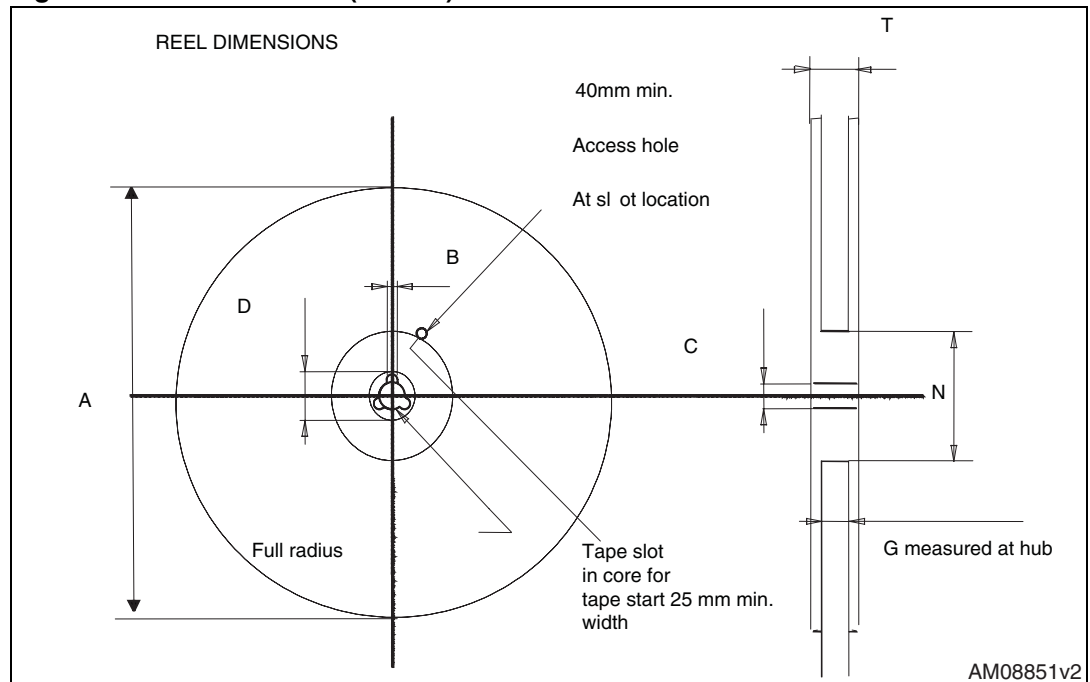

## 6 Revision history

**Table 15. Document revision history**

| Date        | Revision | Changes        |
|-------------|----------|----------------|
| 04-Feb-2011 | 1        | First release. |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2011 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

