





Dual N-Channel Enhancement Mode Field Effect Transistor

PRODUCT SUMMARY

VDSS	ID	RDS(ON) (mΩ) Max
20V	6A	22.0 @ VGS=4.5V
		22.5 @ VGS=4.0V
		23.0 @ VGS=3.7V
		25.0 @ VGS=3.1V
		29.0 @ VGS=2.5V

FEATURES

- Super high dense cell design for low $R_{DS(ON)}$.
- Rugged and reliable.
- Surface Mount Package.
- ESD Protected.

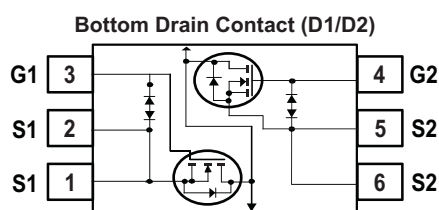

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter		Limit	Units
V _{DS}	Drain-Source Voltage		20	V
V _{GS}	Gate-Source Voltage		±12	V
I _D	Drain Current-Continuous ^c	T _A =25°C	6	A
		T _A =70°C	4.8	A
I _{DM}	-Pulsed ^{a c}		36	A
P _D	Maximum Power Dissipation	T _A =25°C	1.4	W
		T _A =70°C	0.9	W
T _J , T _{STG}	Operating Junction and Storage Temperature Range		-55 to 150	°C

THERMAL CHARACTERISTICS

$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	90	$^\circ\text{C/W}$
-----------------	---	----	--------------------





STF8236







Ver 1.0





ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
OFF CHARACTERISTICS						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =250uA	20			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =16V , V _{GS} =0V			1	uA
I _{GSS}	Gate-Body Leakage Current	V _{GS} = ±8V , V _{DS} =0V			±1	uA
ON CHARACTERISTICS						
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =1.0mA	0.5	0.7	1.5	V
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =4.5V , I _D =3.0A	14.0	17.5	22.0	m ohm
		V _{GS} =4.0V , I _D =3.0A	14.5	18.0	22.5	m ohm
		V _{GS} =3.7V , I _D =3.0A	15.0	18.5	23.0	m ohm
		V _{GS} =3.1V , I _D =3.0A	15.5	19.5	25.0	m ohm
		V _{GS} =2.5V , I _D =1.5A	17.5	22.0	29.0	m ohm
g _{FS}	Forward Transconductance	V _{DS} =5V , I _D =3A		20		S
SWITCHING CHARACTERISTICS ^b						
t _{D(ON)}	Turn-On Delay Time	V _{DD} =16V I _D =3A V _{GS} =4.5V R _{GEN} = 6 ohm		11		ns
t _r	Rise Time			19		ns
t _{D(OFF)}	Turn-Off Delay Time			36		ns
t _f	Fall Time			21		ns
Q _g	Total Gate Charge	V _{DS} =16V,I _D =6A, V _{GS} =4.5V		6.3		nC
Q _{gs}	Gate-Source Charge			0.83		nC
Q _{gd}	Gate-Drain Charge			3.4		nC
DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS						
V _{SD}	Diode Forward Voltage	V _{GS} =0V,I _S =6A		0.86	1.2	V
Notes						
a.Pulse Test:Pulse Width ≤ 10us, Duty Cycle ≤ 1%.						
b.Guaranteed by design, not subject to production testing.						
c.Drain current limited by maximum junction temperature.						
d.Mounted on FR4 Board of 1 inch ² , 2oz.						

Oct,24,2014

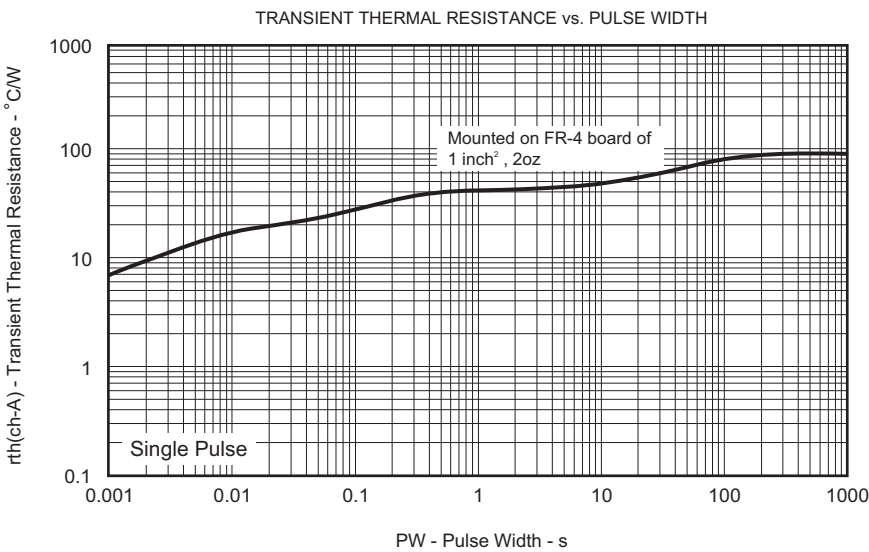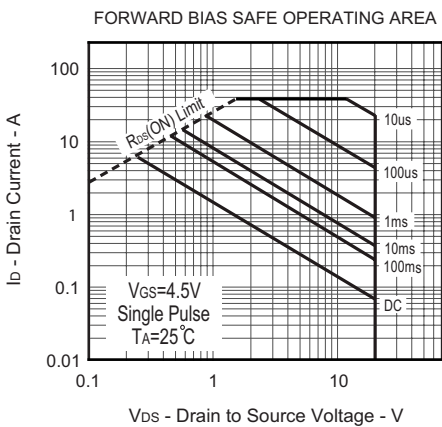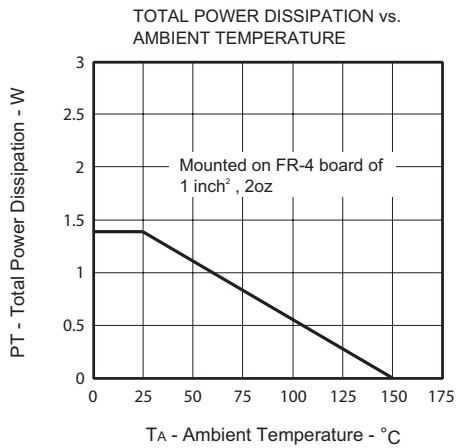
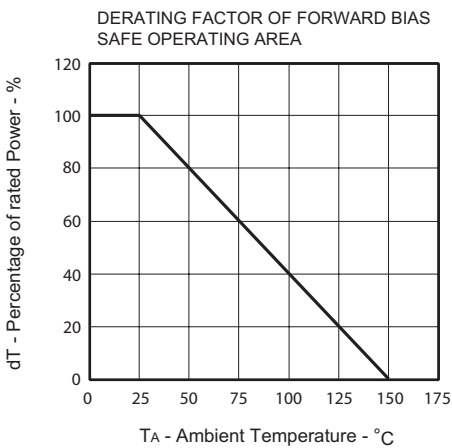


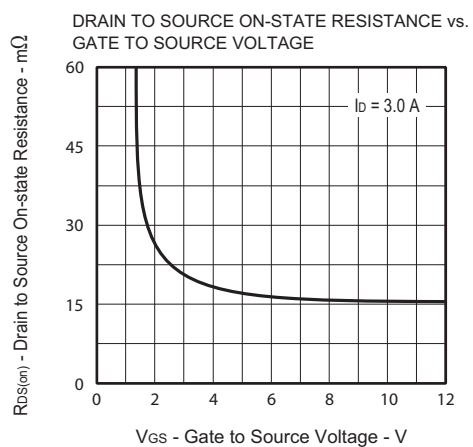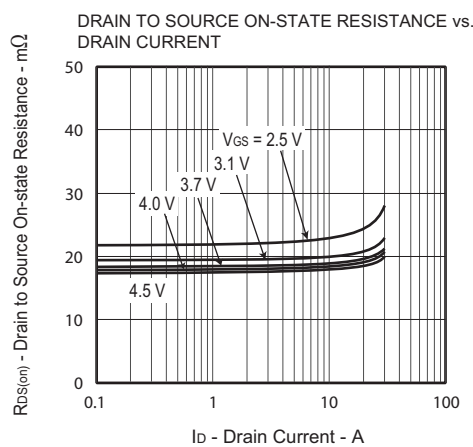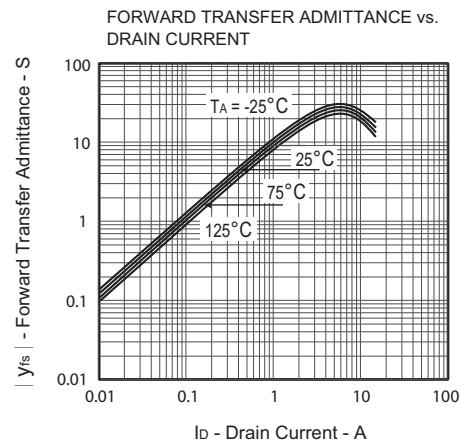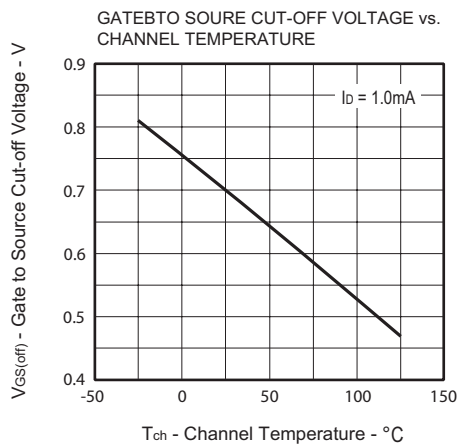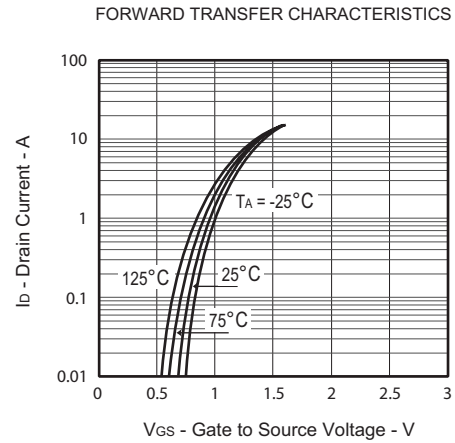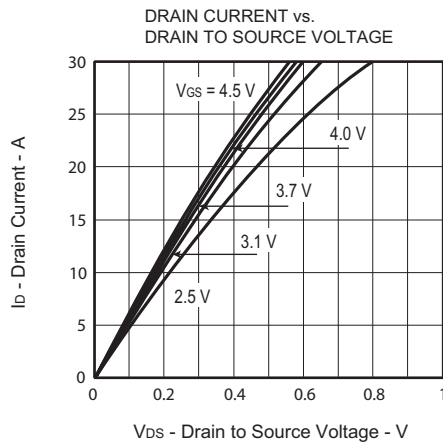

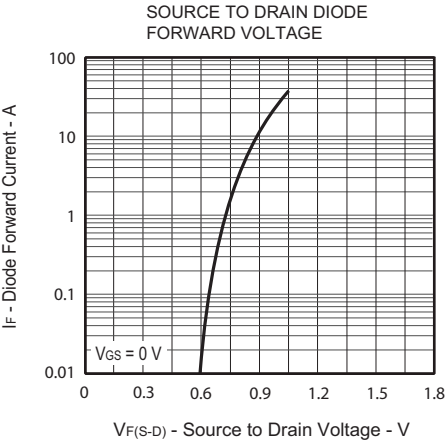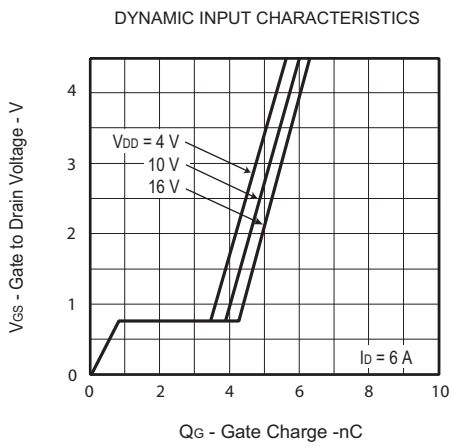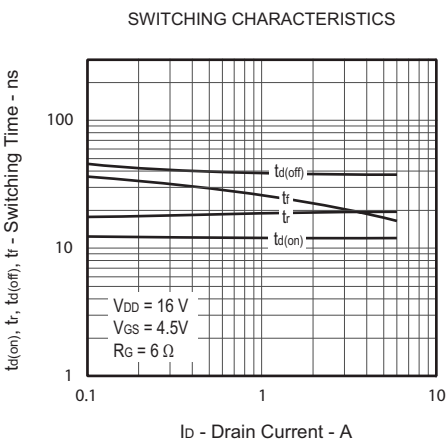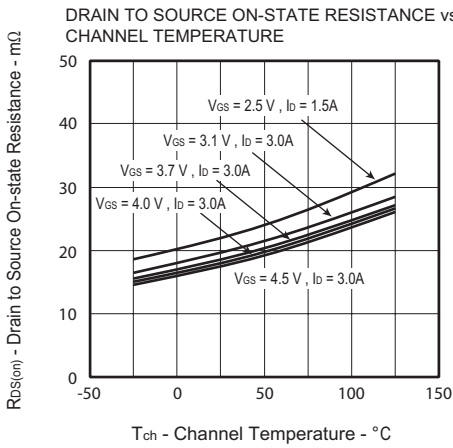

PACKAGE OUTLINE DIMENSIONS

DFN 2x2-6L

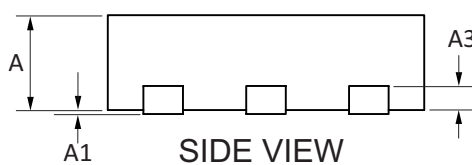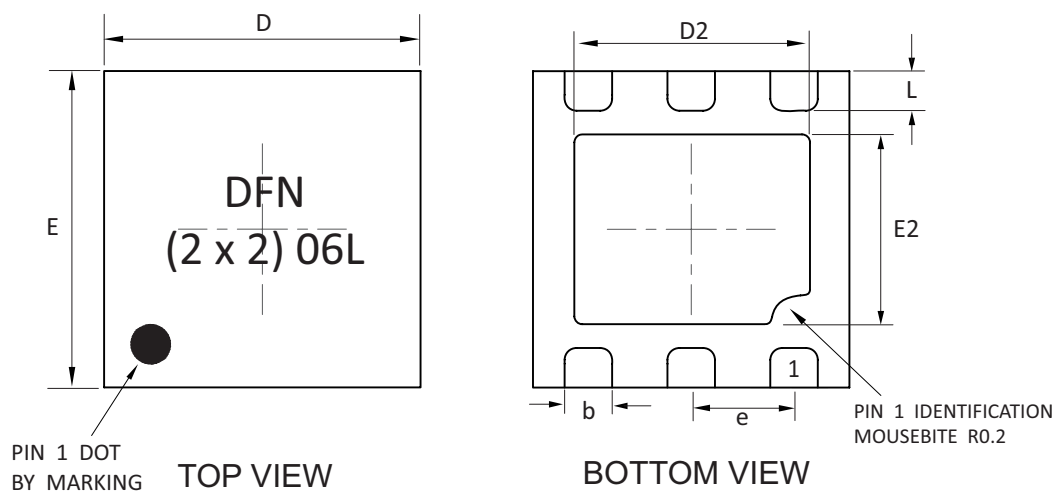

SYMBOLS	MILLIMETERS		
	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	0.00	—	0.05
A3	0.2 REF.		
D	1.95	2.00	2.05
E	1.95	2.00	2.05
D2	1.35	1.50	1.60
E2	0.65	0.80	0.90
b	0.25	0.30	0.35
L	0.25	0.35	0.45
e	0.65 BSC.		