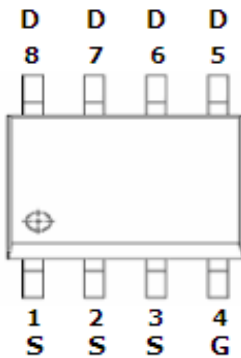
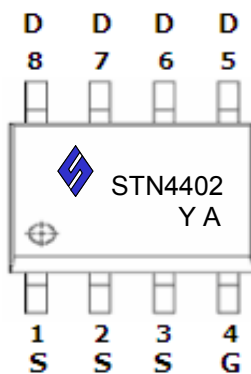
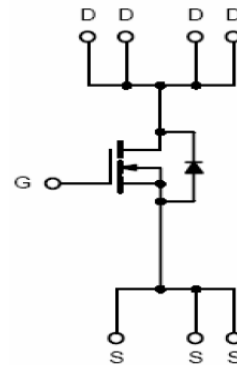


DESCRIPTION

STN4402 is the N-Channel logic enhancement mode power field effect transistor which is produced using high cell density, DMOS trench technology. This high density process is especially tailored to minimize on-state resistance. These devices are particularly suited for low voltage application such as power management and other battery powered circuits where high-side switching.

**PIN CONFIGURATION
SOP-8**

**PART MARKING
SOP-8**

FEATURE

- 30V/12A, $R_{DS(ON)} = 13m\Omega$ (Typ.) @ $V_{GS} = 10V$
- 30V/10A, $R_{DS(ON)} = 18m\Omega$ @ $V_{GS} = 4.5V$
- Super high density cell design for extremely low $R_{DS(ON)}$
- Exceptional on-resistance and maximum DC current capability
- SOP-8 package design



Y: Year Code A: Process Code



STN4402 

N Channel Enhancement Mode MOSFET

12A







ABSOLUTE MAXIMUM RATINGS (Ta = 25°C Unless otherwise noted)

Parameter	Symbol	Typical	Unit
Drain-Source Voltage	VDSS	30	V
Gate-Source Voltage	VGSS	±20	V
Continuous Drain Current (TJ=150°C)	ID	TA=25°C 12	A
		TA=70°C 10	
Pulsed Drain Current	IDM	30	A
Continuous Source Current (Diode Conduction)	IS	2.3	A
Power Dissipation	PD	TA=25°C 2.5	W
		TA=70°C 1.6	
Operation Junction Temperature	TJ	-55/150	°C
Storage Temperature Range	TSTG	-55/150	°C
Thermal Resistance-Junction to Ambient	RθJA	80	°C/W






ELECTRICAL CHARACTERISTICS (Ta = 25°C Unless otherwise noted)


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Static						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=250\mu A$	30			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	1.0		3.0	V
Gate Leakage Current	I_{GSS}	$V_{DS}=0V, V_{GS}=\pm 20V$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=24V, V_{GS}=0V$			1	uA
		$V_{DS}=24V, V_{GS}=0V$ $T_J=85^\circ C$			5	
On-State Drain Current	$I_{D(on)}$	$V_{DS} \geq 5V, V_{GS}=10V$	25			A
Drain-source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=12A$ $V_{GS}=4.5V, I_D=10A$		10 13	13 18	mΩ
Forward Transconductance	g_{fs}	$V_{DS}=15V, I_D=6.2A$		13		S
Diode Forward Voltage	V_{SD}	$I_S=2.3A, V_{GS}=0V$		0.8	1.2	V
Dynamic						
Total Gate Charge	Q_g	$V_{DS}=15V, V_{GS}=10V$ $I_D=2A$		16	24	nC
Gate-Source Charge	Q_{gs}			4.2		
Gate-Drain Charge	Q_{gd}			2.5		
Input Capacitance	C_{iss}	$V_{DS} = 15V, V_{GS}=0V$ $F=1MHz$		1350		pF
Output Capacitance	C_{oss}			258		
Reverse Transfer Capacitance	C_{rss}			150		
Turn-On Time	$t_{d(on)}$ t_r	$V_{DD}=15V, R_L=15\Omega$ $I_D=5.0A, V_{GEN}=-10V$ $R_G=1\Omega$		15	20	nS
				6	16	
Turn-Off Time	$t_{d(off)}$ t_f			20	40	
				12	20	

TYPICAL CHARACTERISTICS

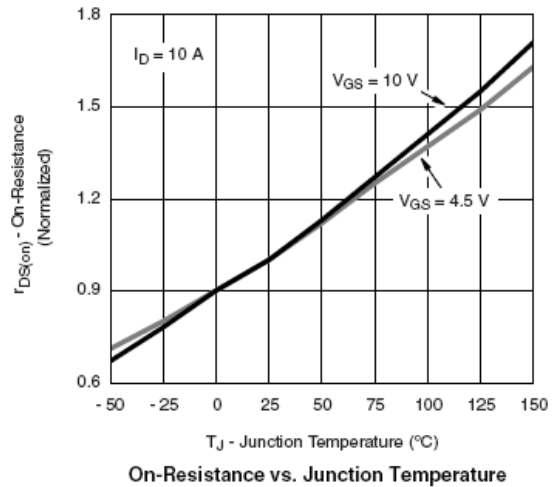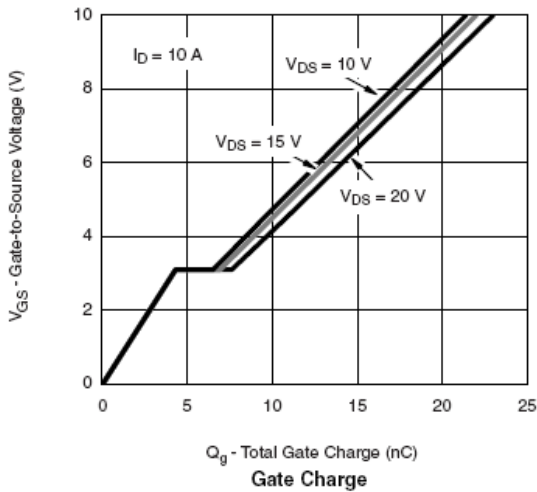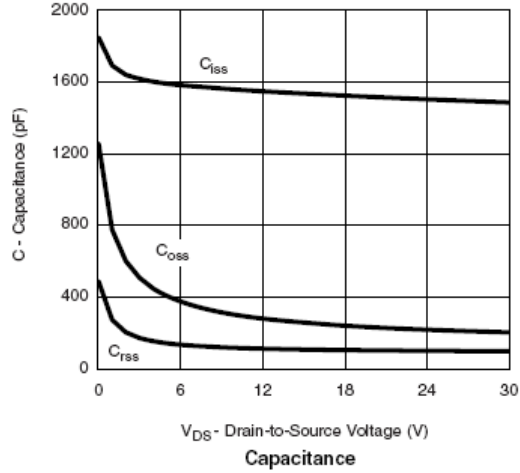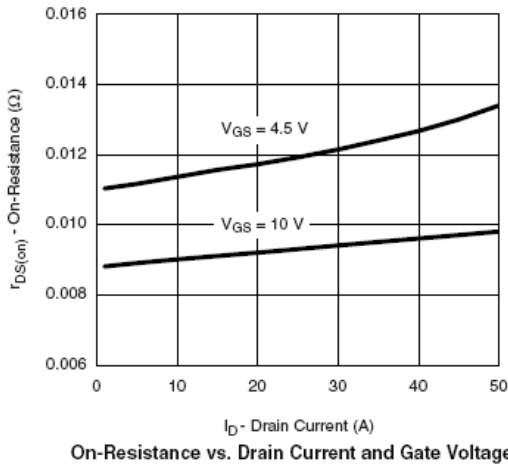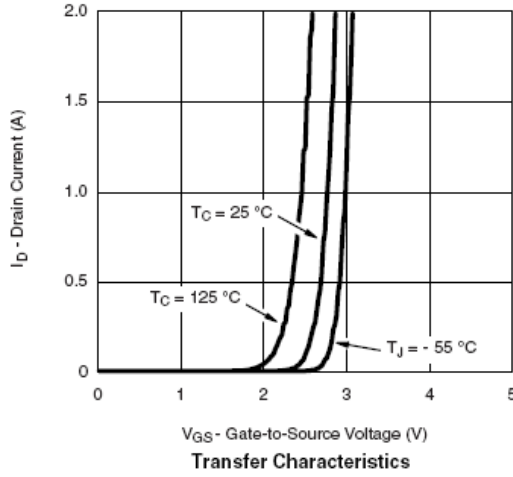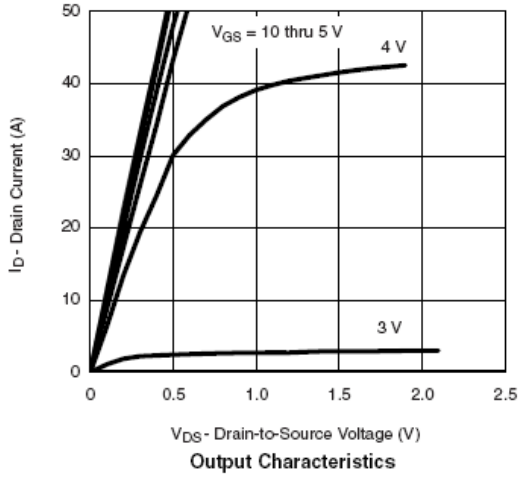

TYPICAL CHARACTERISTICS

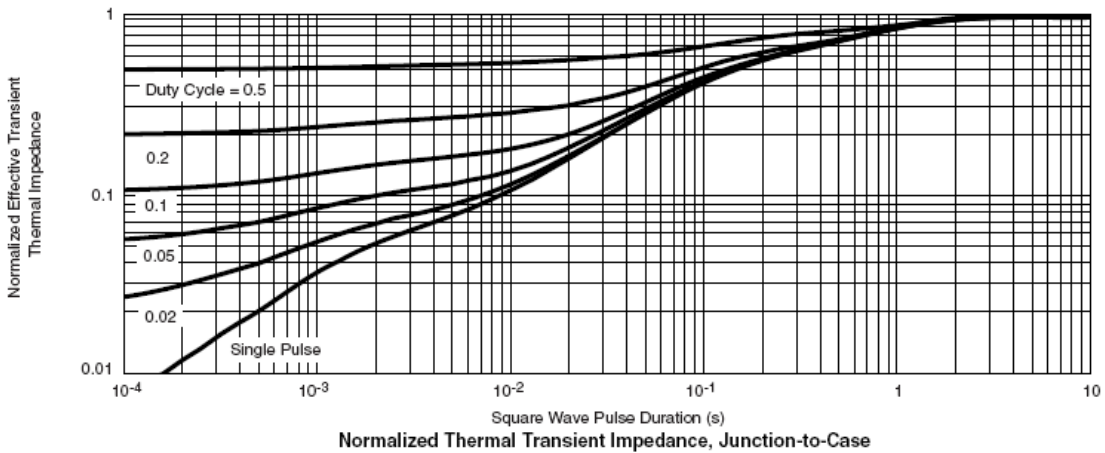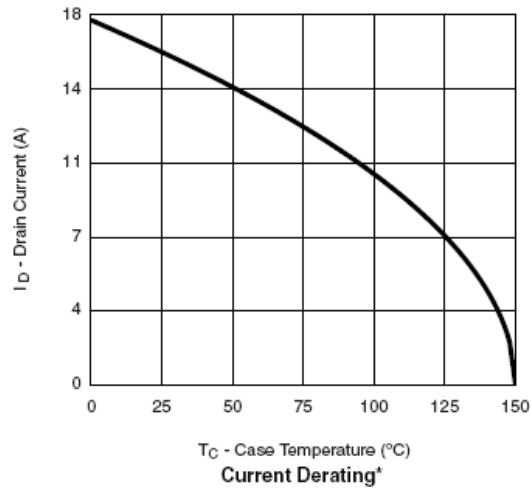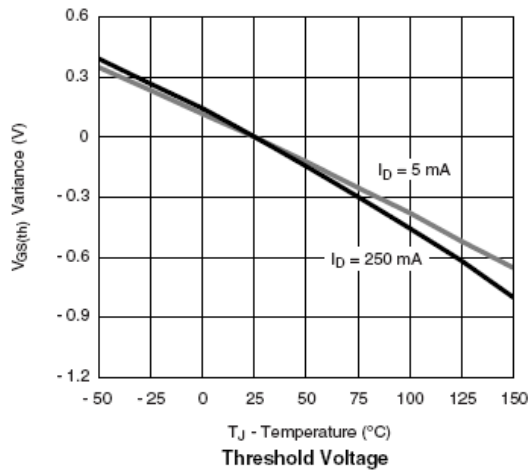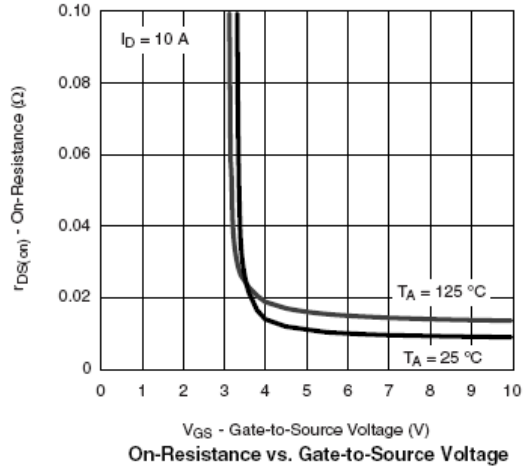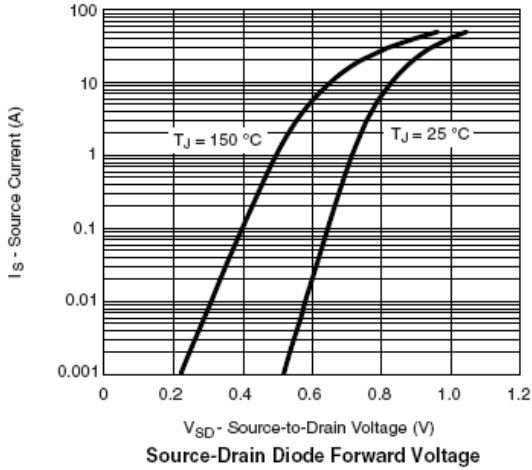

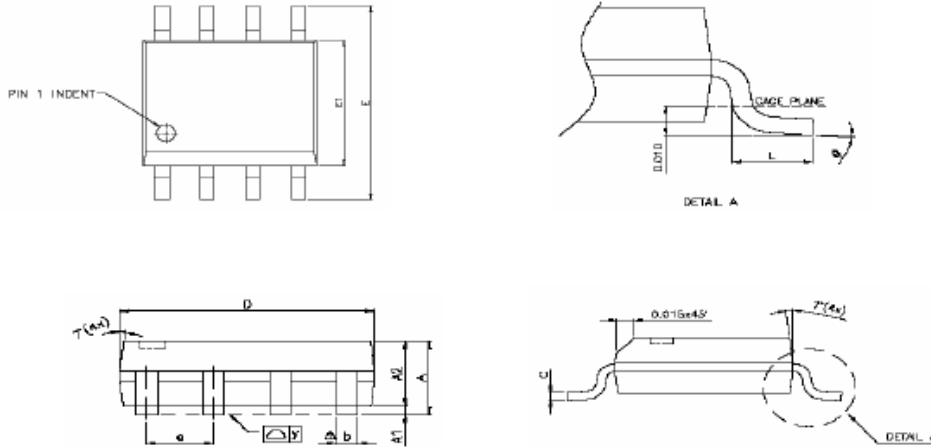PACKAGE OUTLINE SOP-8P


SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.47	1.60	1.73	0.058	0.063	0.068
A1	0.10	—	0.25	0.004	—	0.010
A2	—	1.45	—	—	0.057	—
b	0.33	0.41	0.51	0.013	0.016	0.020
C	0.19	0.20	0.25	0.0075	0.008	0.0098
D	4.80	4.85	4.95	0.189	0.191	0.195
E	5.80	6.00	6.20	0.228	0.236	0.244
E1	3.80	3.90	4.00	0.150	0.154	0.157
e	—	1.27	—	—	0.050	—
L	0.38	0.71	1.27	0.015	0.028	0.050
Δ y	—	—	0.076	—	—	0.003
ϕ	0°	—	8°	0°	—	8°