


Near field communication transceiver

Datasheet –production data

Features

- Operating modes supported:
 - Reader/Writer
 - Card Emulation
 - Peer-to-Peer
- Hardware features
 - Dedicated internal frame controller
 - Highly integrated Analog Front End (AFE) for RF communications
 - Transmission and reception modes
 - Optimized power management
 - Tag Detection mode
 - Field Detection mode
- RF communication @13.56 MHz
 - ISO/IEC 14443 Type A and B in Reader and Card Emulation modes
 - ISO/IEC 15693 in Reader mode
 - ISO/IEC 18092 in Reader and Card Emulation modes
- Communication interfaces with a Host Controller
 - Serial peripheral interface (SPI) Slave interface up to 2 Mbps
 - Universal asynchronous receiver/transmitter (UART) up to 2 Mbps in Reader mode only (not available for Card Emulation mode)
 - 256-byte command buffer (FIFO)
- 32-lead, 5x5 mm, very thin fine pitch quad flat (VFQFPN) ECOPACK® package

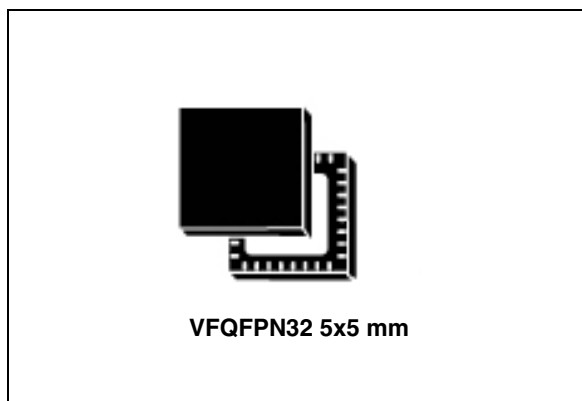

Applications

Typical protocols supported:

- ISO/IEC 14443-3 Type A and B tags
- ISO/IEC 15693
- ISO/IEC 18000-3M1 tags
- NFC Forum tags: Types 1, 2, 3 and 4
- ST Dual Interface EEPROM

Typical STRNFCA applications include:

- Handheld readers (OTP, PIN pad, POS)
 - E-payment, physical access control, transport, and government
- PC-Link (USB /Serial/PCMCIA)
 - E-payment, security access & authentication, data exchange
- USB token
 - Security access & authentication, data exchange
- Integrated solution (chipset)
- Keyboard, laptop, set top box, printer, TV, etc.
- E-payment, data exchange, Bluetooth pairing, security access

Contents

1	Description	4
1.1	Block diagram	4
1.2	List of terms	5
2	Pin and signal descriptions	6
3	Power management and operating modes	8
3.1	Operating modes	8
3.2	Startup sequence	9
4	Communication protocols	11
4.1	Universal asynchronous receiver/transmitter (UART)	11
4.2	Serial peripheral interface (SPI)	12
4.2.1	Polling mode	12
4.2.2	Interrupt mode	14
5	Commands	15
5.1	Command format	15
5.2	List of commands	15
5.3	IDN command (0x01) description	16
5.4	Protocol Select command (0x02) description	17
5.5	Pollfield command (0x03) description	22
5.6	Send Receive (SendRecv) command (0x04) description	23
5.7	Listen command (0x05) description	27
5.8	Send command (0x06) description	30
5.9	Idle command (0x07) description	31
5.9.1	Idle command parameters	33
5.9.2	Using LFO frequency setting to reduce power consumption	34
5.9.3	Optimizing wake-up conditions	35
5.9.4	Using various techniques to return to Ready state	35
5.9.5	Tag detection calibration procedure	37
5.10	Read Register (RdReg) command (0x08) description	38
5.11	Write Register (WrReg) command (0x09) description	38
5.11.1	Improving RF performance	39
5.11.2	Improving frame reception for ISO/IEC 14443 Type A tags	40

5.11.3	Improving RF reception for ISO/IEC 18092 tags	41
5.11.4	Managing VPS_TX consumption in Ready state	42
5.12	BaudRate command (0x0A) description	43
5.13	AcFilter command (0x0D) description	44
5.14	Echo command (0x55) description	45
6	Electrical characteristics	46
6.1	Absolute maximum ratings	46
6.2	DC characteristics	47
6.3	Power consumption characteristics	48
6.4	SPI characteristics	50
6.5	RF characteristics	52
6.6	Oscillator characteristics	54
7	Package mechanical data	55
Appendix A	Additional Idle command description	57
Appendix B	Example of tag detection calibration process	58
Appendix C	Example of tag detection command using results of tag detection calibration⁶¹	
Appendix D	Examples of STRFNFCA command code to activate NFC Forum and ISO/IEC 15693 tags⁶²	
D.1	ISO/IEC 14443 Type A	62
D.1.1	NFC Forum Tag Type 1 (Topaz)	62
D.1.2	NFC Forum Tag Type 2	64
D.1.3	NFC Forum Tag Type 4A	65
D.2	ISO/IEC 14443 Type B	67
D.2.1	NFC Forum Tag Type 4B	67
D.3	ISO/IEC 18092	70
D.3.1	NFC Forum Tag Type 3	70
D.4	ISO/IEC 15693	71
D.4.1	ISO/IEC 15693 tag	71
	Revision history	73

1 Description

The STRFNFCA is an integrated transceiver IC for contactless applications.


The STRFNFCA manages frame coding and decoding in Reader, Card Emulation and Peer-to-Peer modes for standard applications such as near field communication (NFC), proximity and vicinity standards.

The STRFNFCA embeds an Analog Front End to provide the 13.56 MHz Air Interface.

The STRFNFCA supports ISO/IEC 14443 Type A and B in Reader and Card Emulation modes, ISO/IEC 15693 (single or double subcarrier in Reader mode only) and ISO/IEC 18092 protocols in Reader and Card Emulation modes.


The STRFNFCA also supports the detection, reading and writing of NFC Forum Type 1, 2, 3 and 4 tags.

Figure 1. STRFNFCA application overview

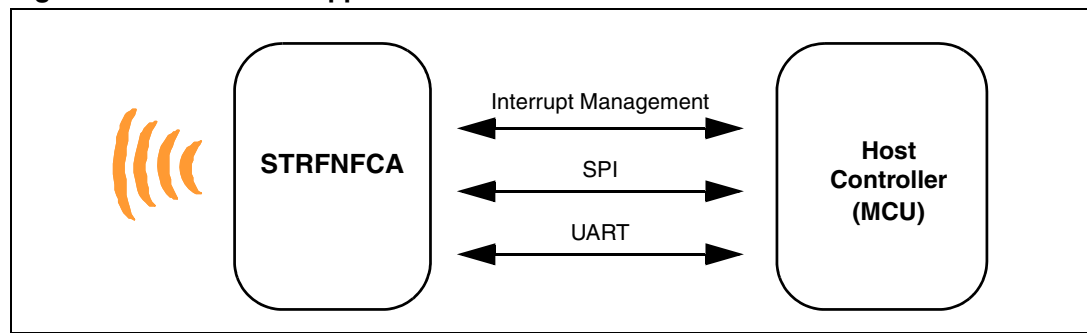

1.1 Block diagram

Figure 2. STRFNFCA block diagram

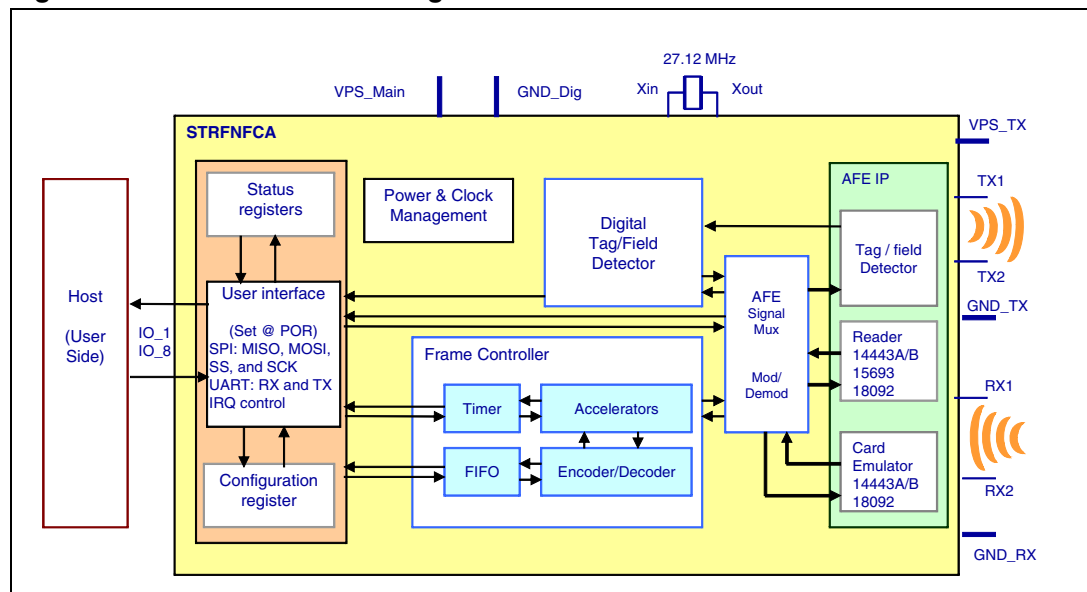

1.2 List of terms

Table 1. List of terms

Term	Meaning
DAC	Digital analog converter
GND	Ground
HFO	High frequency oscillator
LFO	Low frequency oscillator
MCU	Microcontroller unit
NFC	Near Field Communication
RFID	Radio Frequency Identification
RFU	Reserved for future use
SPI	Serial peripheral interface
t_L	Low frequency period
t_{REF}	Reference time
UART	Universal asynchronous receiver-transmitter
WFE	Wait For Event

2 Pin and signal descriptions

Figure 3. STRFNFCA pinout description

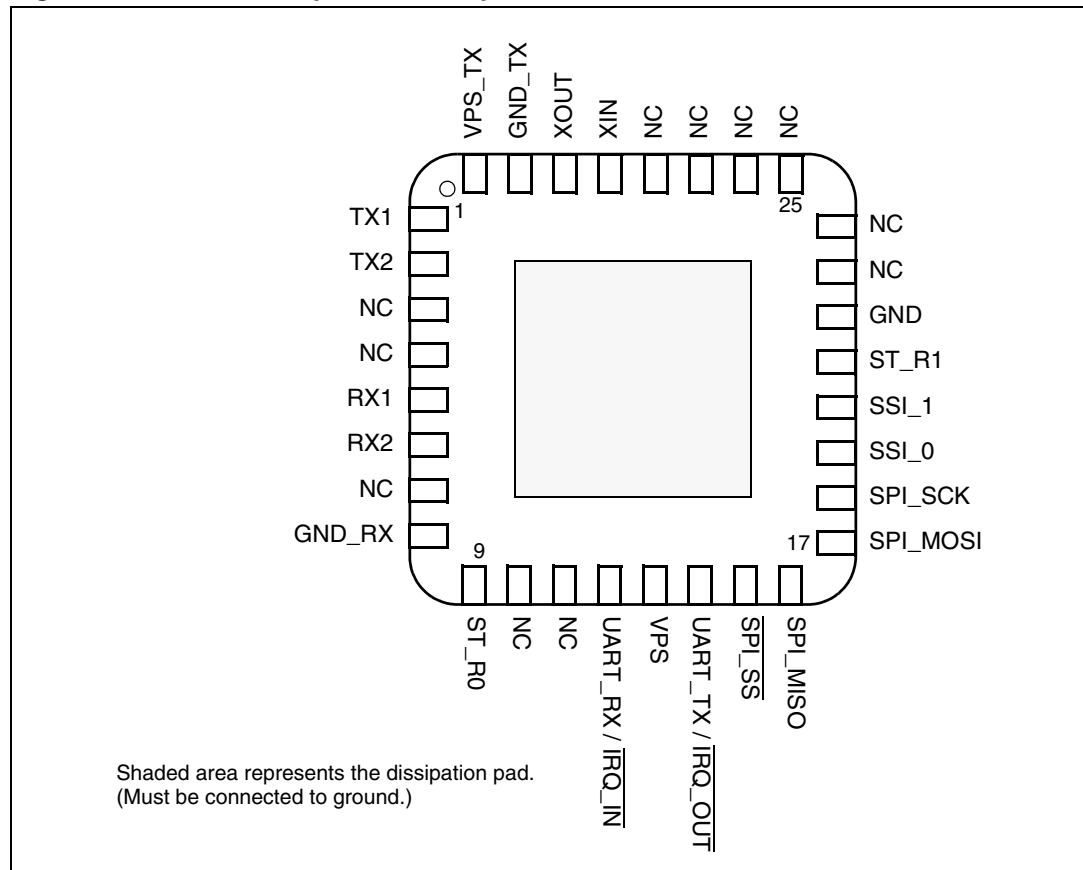


Table 2. STRFNFCA pin descriptions

Pin	Pin name	Type ⁽¹⁾	Main function	Alternate function
1	TX1	O	Driver output 1	
2	TX2	O	Driver output 2	
3	NC		Not connected	
4	NC		Not connected	
5	RX1	I	Receiver input 1	
6	RX2	I	Receiver input 2	
7	NC		Not connected	
8	GND_RX	P	Ground (analog)	
9	ST_R0	O	ST Reserved ⁽²⁾	
10	NC		Not connected	
11	NC		Not connected	

Table 2. STRNFCA pin descriptions (continued)

Pin	Pin name	Type ⁽¹⁾	Main function	Alternate function
12	UART_RX / $\overline{\text{IRQ_IN}}$	I ⁽³⁾	UART receive pin ⁽⁴⁾	Interrupt input
13	VPS	P	Main power supply	
14	UART_TX / $\overline{\text{IRQ_OUT}}$	O ⁽⁵⁾	UART transmit pin	Interrupt output
15	$\overline{\text{SPI_SS}}$	I ⁽⁵⁾	SPI Slave Select (active low)	
16	SPI_MISO	O ⁽⁵⁾	SPI Data, Slave Output	
17	SPI_MOSI	I ⁽⁵⁾	SPI Data, Slave Input ⁽⁶⁾	
18	SPI_SCK	I ⁽⁷⁾	SPI serial clock	
19	SSI_0	I ⁽⁵⁾	Select serial communication interface	
20	SSI_1	I ⁽⁵⁾	Select serial communication interface	
21	ST_R1	I ⁽⁸⁾	ST Reserved	
22	GND	P	Ground (digital)	
23	NC		Not connected	
24	NC		Not connected	
25	NC		Not connected	
26	NC		Not connected	
27	NC		Not connected	
28	NC		Not connected	
29	XIN		Crystal oscillator input	
30	XOUT		Crystal oscillator output	
31	GND_TX	P	Ground (RF drivers)	
32	VPS_TX	P	Power supply (RF drivers)	

1. I: Input, O: Output, and P: Power

2. Must add a capacitor to ground (68 nF).

3. Pad internally connected to a Very Weak Pull-up to VPS.

4. We recommend connecting this pin to the V_{PS} pin using a 3.3 kOhm pull-up resistor.

5. Pad internally connected to a Weak Pull-up to VPS.

6. Must not be left floating.

7. Pad internally connected to a Weak Pull-down to GND.

8. Pad input in High Impedance. Must be connected to VPS.

3 Power management and operating modes

3.1 Operating modes

The STRFNFCA has 2 operating modes: Wait for Event (WFE) and Active. In Active mode, the STRFNFCA communicates actively with a tag or an external host (an MCU, for example). WFE mode includes four low consumption states: Power-up, Hibernate, Sleep/Field Detector and Tag Detector.

The STRFNFCA can switch from one mode to another.


Table 3. STRFNFCA operating modes and states

Mode	State	Description
Wait For Event (WFE)	Power-up	This mode is accessible directly after POR. Low level on $\overline{\text{IRQ_IN}}$ pin (longer than 10 μs) is the only wakeup source. LFO (low-frequency oscillator) is running in this state.
	Hibernate	Lowest power consumption state. The STRFNFCA has to be woken-up in order to communicate. Low level on $\overline{\text{IRQ_IN}}$ pin (longer than 10 μs) is the only wakeup source.
	Sleep/Field Detector	Low power consumption state. Wakeup source is configurable: – Timer – $\overline{\text{IRQ_IN}}$ pin – $\overline{\text{SPI_SS}}$ pin – Field Detector LFO (low-frequency oscillator) is running in this state.
	Tag Detector	Low power consumption state with tag detection. Wakeup source is configurable: – Timer – $\overline{\text{IRQ_IN}}$ pin – $\overline{\text{SPI_SS}}$ pin – Tag detector LFO (low-frequency oscillator) is running in this state.
Active	Ready	In this mode, the RF is OFF and the STRFNFCA waits for a command (PROTOCOLSELECT, ...) from the external host via the selected serial interface (UART or SPI).
	Reader	The STRFNFCA can communicate with a tag using the selected protocol or with an external host using the selected serial interface (UART or SPI).
	Card Emulation	The STRFNFCA can communicate as a Card or Tag with an external reader. The Card or Tag application is located in the Host and communicates with the STRFNFCA via the serial interface (SPI).

Hibernate, Tag Detector, and Sleep/Field Detector states can only be activated by a command from the external host. As soon as any of these three states are activated, the STRFNFCA can no longer communicate with the external host. It can only be woken up.

The behavior of the STRFNFCA in 'Tag Detector' state is defined by the Idle command.


Figure 4. STRFNFCA initialization and operating state change

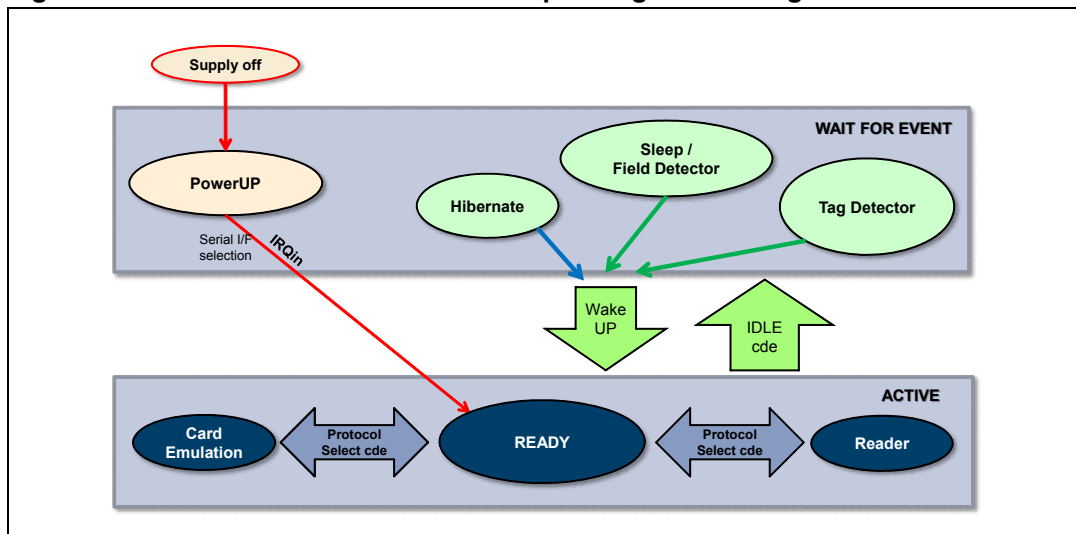

3.2 Startup sequence

After the power supply is established at power-on, the STRFNFCA waits for a low pulse on the pin $\overline{\text{IRQ_IN}}$ (t_1) before automatically selecting the external interface (SPI or UART) and entering Ready state after a delay (t_3).

Figure 5. Power-up sequence

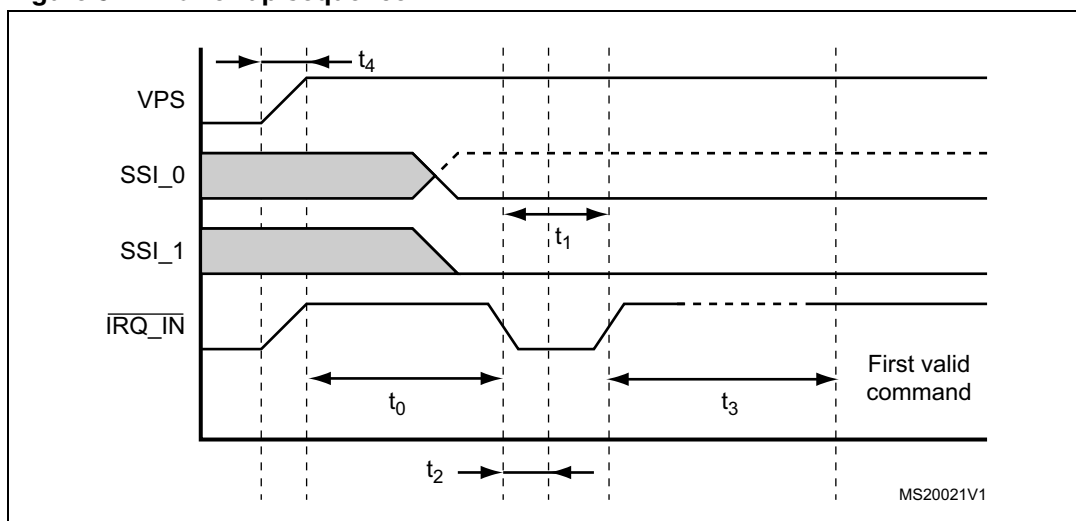

1. Note for pin SSI0: - - - SPI selected, ——— UART selected
2. Pin $\overline{\text{IRQ_IN}}$ low level < 0.2 VPS_Main.

Note: When STRFNFCA leaves WFE mode (from Power-up, Hibernate, Tag Detector, or Sleep/Field Detector) following an $\overline{\text{IRQ_IN}}$ /RX low level pulse, this pulse is NOT interpreted as the UART start bit character.

Figure 5 shows the power-up sequence for a STRNFCA device; where,

- t_0 is the initial wake-up delay 100 μ s (minimum)
- t_1 is the minimum interrupt width 10 μ s (minimum)
- t_2 is the delay for the serial interface selection 250 ns (typical)
- t_3 is the HFO setup time ($t_{SU(HFO)}$) 10 ms (maximum)
- t_4 is the VPS ramp-up time 10 ms (maximum by design validation)

Note: The Serial Interface is selected after the following falling edge of pin $\overline{TRQ_IN}$ when leaving from POR or Hibernate state.

Table 4 lists the signal configuration used to select the serial communication interface.

Table 4. Select serial communication interface selection table


Pin	Serial interface	
SSI_0	UART: 0	SPI: 1
SSI_1	UART: 0	SPI: 0

4 Communication protocols

4.1 Universal asynchronous receiver/transmitter (UART)

The host sends commands to the STRFNFCA and waits for replies. Polling for readiness is not necessary. The default baud rate is 57600 baud. The maximum allowed baud rate is 2 Mbps.

Figure 6. UART communication

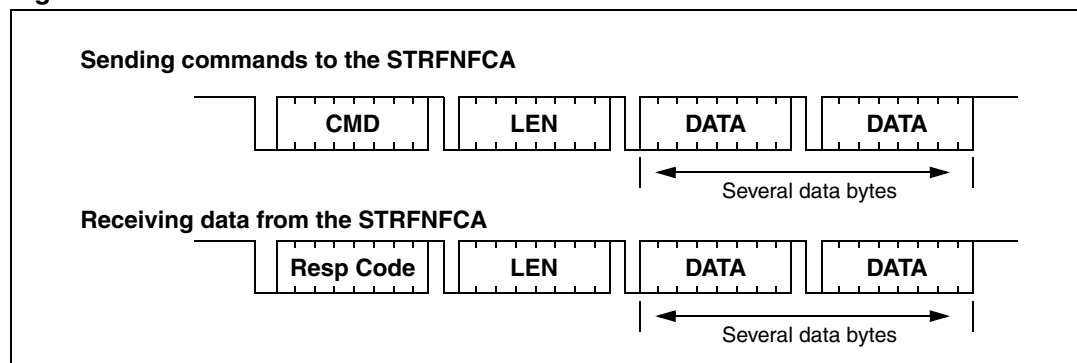

When sending commands, no data must be sent if the LEN field is zero.


When receiving data from the STRFNFCA, no data will be received if the LEN field is zero.

The formats of send and receive packets are identical.

If an ECHO command is sent, only one byte (0x55) is sent by the host.

[Figure 7](#) shows an example of an ECHO command.

Figure 7. ECHO command and response example

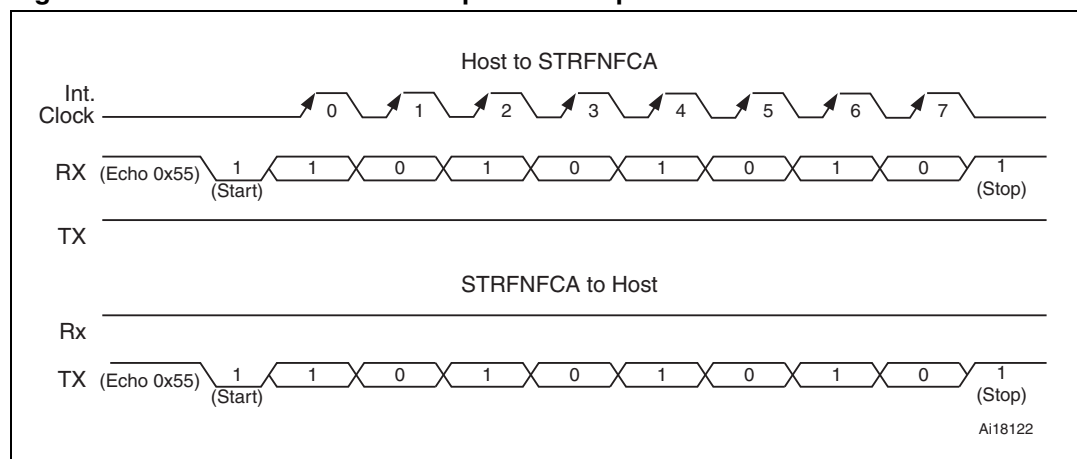

Caution: **UART communication is LSB first. Stop bit duration is two Elementary Time Units (ETUs).**

- Note:**
- 1 When STRFNFCA leaves WFE mode (from Power-up, Hibernate, Sleep/Field Detector or Tag Detector) following an $\overline{IRQ_IN}/RX$ low level pulse, this pulse is NOT interpreted as the UART start bit character.
 - 2 If the user loses UART synchronization, it can be recovered by sending an ECHO command until a valid ECHO reply is received. Otherwise, after a maximum of 255 ECHO commands,

STRFNFCA will reply with an error code meaning its input buffer is full. The user can now restart a UART exchange.

4.2 Serial peripheral interface (SPI)

4.2.1 Polling mode

In order to send commands and receive replies, the application software has to perform 3 steps.

- 1. Send the command to the STRFNFCA.
- 2. Poll the STRFNFCA until it is ready to transmit the response.
- 3. Read the response.

The application software should never read data from the STRFNFCA without being sure that the STRFNFCA is ready to send the response.

The maximum allowed SPI communication speed is f_{SCK} .

A Control byte is used to specify a communication type and direction:

- 0x00: Send command to the STRFNFCA
- 0x03: Poll the STRFNFCA
- 0x02: Read data from the STRFNFCA
- 0x01: Reset the STRFNFCA

The $\overline{SPI_SS}$ line is used to select a device on the common SPI bus. The $\overline{SPI_SS}$ pin is active low.

When the $\overline{SPI_SS}$ line is inactive, all data sent by the Master device is ignored and the MISO line remains in High Impedance state.

In Slave mode, the phase and polarization are defined with CPOL = 1 and CPHA = 1 or CPOL = 0 and CPHA = 0.

Figure 8. Sending command to STRFNFCA

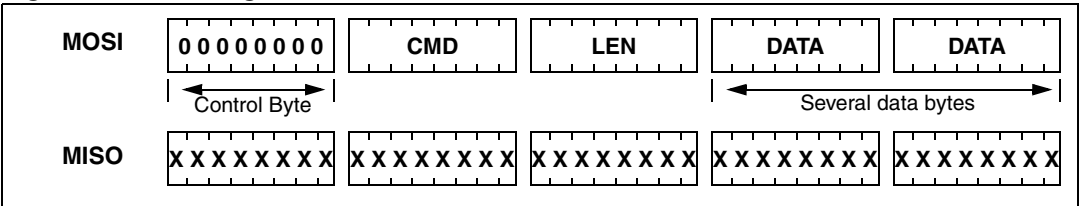


Figure 9. Polling the STRFNFCA until it is ready

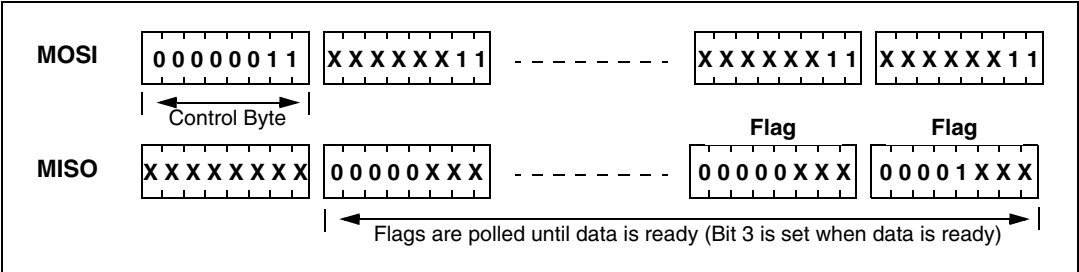
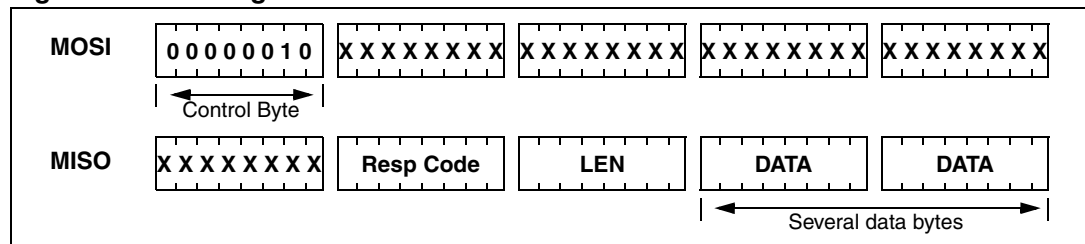


Table 5. Interpretation of flags

Bit	Meaning (Application point of view)
[7:4]	Not significant
3	Data can be read from the STRFNFCA when set.
2	Data can be sent to the STRFNFCA when set.
[1:0]	Not significant

Figure 10. Reading data from STRFNFCA

Data must be sampled at the rising edge of the SCK signal.

'Sending', 'Polling' and 'Reading' commands must be separated by a high level of the $\overline{\text{SPI_SS}}$ line. For example, when the application needs to wait for data from the STRFNFCA, it asserts the $\overline{\text{SPI_SS}}$ line low and issues a 'Polling' command. Keeping the $\overline{\text{SPI_SS}}$ line low, the Host can read the Flags Waiting bit which indicates that the STRFNFCA can be read. Then, the application has to assert the $\overline{\text{SPI_SS}}$ line high to finish the polling command. The Host asserts the $\overline{\text{SPI_SS}}$ line low and issues a 'Reading' command to read data. When all data is read, the application asserts the $\overline{\text{SPI_SS}}$ line high.

The application is not obliged to keep reading Flags using the Polling command until the STRFNFCA is ready in one command. It can issue as many 'Polling' commands as necessary. For example, the application asserts $\overline{\text{SPI_SS}}$ low, issues 'Polling' commands and reads Flags. If the STRFNFCA is not ready, the application can assert $\overline{\text{SPI_SS}}$ high and continue its algorithm (measuring temperature, communication with something else). Then, the application can assert $\overline{\text{SPI_SS}}$ low again and again issue 'Polling' commands, and so on, as many times as necessary, until the STRFNFCA is ready.

Note that at the beginning of communication, the application does not need to check flags to start transmission. The STRFNFCA is assumed to be ready to receive a command from the application.

Figure 11. Reset the STRFNFCA

To reset the STRFNFCA using the SPI, the application sends the SPI Reset command (Control Byte 01, see [Figure 11](#)) which starts the internal controller reset process and puts the STRFNFCA into Power-up state. The STRFNFCA will wake up when pin $\overline{\text{IRQ_IN}}$ goes low. The STRFNFCA reset process only starts when the $\overline{\text{SPI_SS}}$ pin returns to high level.

Caution: SPI communication is MSB first.

4.2.2 Interrupt mode

When the STRFNCA is configured to use the SPI serial interface, pin $\overline{\text{IRQ_OUT}}$ is used to give additional information to user. When the STRFNCA is ready to send back a reply, it sends an Interrupt Request by setting a low level on pin $\overline{\text{IRQ_OUT}}$, which remains low until the host reads the data.

The application can use the Interrupt mode to skip the polling stage.

Caution: SPI communication is MSB first.

5 Commands

5.1 Command format

- The frame from the Host to the STRFNFCA has the following format:
<CMD><Len><Data>
- The frame from the STRFNFCA to Host has the following format:
<RespCode><Len><Data>

These two formats are available either in both UART and SPI modes.

Fields <Cmd>, <RespCode> and <Len> are always 1 byte long. <Data> can be from 0 to 255 bytes.

Note: The ECHO command is an exception as it has only one byte (0x55).

The following symbols correspond to:

- >>> Frame sent by the Host to STRFNFCA
- <<< Frame sent by the STRFNFCA to the Host

5.2 List of commands

[Table 6](#) summarizes the available commands.

Table 6. List of STRFNFCA commands

Code	Command	Description
0x01	IDN	Requests short information about the STRFNFCA and its revision.
0x02	PROTOCOLSELECT	Selects the RF communication protocol and specifies certain protocol-related parameters.
0x03	POLLFIELD	Returns the current value of the FieldDet flag (used in Card Emulation mode).
0x04	SENDRECV	Sends data using the previously selected protocol and receives the tag response.
0x05	LISTEN	Listens for data using previously selected protocol (used in Card Emulation mode).
0x06	SEND	Sends data using previously selected protocol (used in Card Emulation mode).
0x07	IDLE	Switches the STRFNFCA into a low consumption Wait for Event (WFE) mode (Power-up, Hibernate, Tag Detector, or Sleep/Field Detector), specifies the authorized wake-up sources and waits for an event to exit to Ready state.
0x08	RDREG	Reads Wake-up event register or the Analog Register Configuration (ARC_B) register.

Table 6. List of STRFNFC commands (continued)

Code	Command	Description
0x09	WrREG	Writes Analog Register Configuration (ARC_B) register or writes index of ARC_B register address. Writes the Timer Window (TimerW) value dedicated to ISO/IEC 14443 Type A tags. Writes the AutoDetect Filter enable register dedicated to ISO/IEC 18092 tags.
0x0A	BAUDRATE	Sets the UART baud rate.
0x0D	ACFILTER	Enables or disables the anticollision filter.
0x55	ECHO	STRFNFCA performs a serial interface ECHO command (reply data 0x55 or stops the Listening state when a listen command has been sent without error).
Other codes		ST Reserved

5.3 IDN command (0x01) description

The IDN command (0x01) gives brief information about the STRFNFC and its revision.

Table 7. IDN command description

Direction	Data	Comments	Example
Host to STRFNFC	0x01	Command code	>>>0x0100
	0x00	Length of data	
STRFNFCA to Host	0x00	Result code	<<<0x000F4E4643204653324A415354320075D2 In this example, <<<0x4E4643204653324A4153543200: 'NFC FS2JAST2', #2 (Last Character of NFC FS2JAST2 means ROM code revision 2.) 0x75D2: CRC of ROM (real CRC may differ from this example)
	<Len>	Length of data	
	<Device ID>	Data in ASCII format	
	<ROM CRC>	CRC calculated for ROM content	

It takes approximately 6 ms to calculate the CRC for the entire ROM. The application must allow sufficient time for waiting for a response for this command.

5.4 Protocol Select command (0x02) description

This command selects the RF communication protocol and prepares the STRFNFCA for communication with a contactless tag.

Table 8. PROTOCOLSELECT command description

Direction	Data	Comments	Example
Host to STRFNFCA	0x02	Command code	<p>See Table 9: List of <Parameters> values for the ProtocolSelect command for different protocols (Reader) on page 18.</p> <p>See Table 10: List of <Parameters> values for different protocols (Card Emulation) on page 21.</p>
	<Len>	Length of data	
	<Protocol>	Protocol codes (Reader): 00: Field OFF 01: ISO/IEC 15693 02: ISO/IEC 14443-A / NFC Forum Tag Type 1, Type 2, Type 4A 03: ISO/IEC 14443-B / NFC Forum Tag Type 4B 04: ISO/IEC 18092 / NFC Forum Tag Type 3 ----- Protocol codes (Card Emulation): 12: ISO/IEC 14443-A 13: ISO/IEC 14443-B 14: ISO/IEC 18092	
	<Parameters>	Each protocol has a different set of parameters. See Table 9 .	
STRFNFCA to Host	0x00	Result code	<<<0x0000
	0x00	Length of data	Protocol is successfully selected
STRFNFCA to Host	0x82	Error code	<<<0x8200
	0x00	Length of data	Invalid command length
STRFNFCA to Host	0x83	Error code	<<<0x8300
	0x00	Length of data	Invalid protocol

Note that there is no 'Field ON' command. When the application selects an RF communication protocol, the field automatically switches ON if the Reader state is selected.

When the application selects a protocol, the STRFNFCA performs all necessary settings: it will choose the appropriate reception and transmission chains, switch ON or OFF the RF field and connect the antenna accordingly.

Different protocols have different sets of parameters. Values for the <Parameters> field are listed in [Table 9](#).

Table 9. List of <Parameters> values for the PROTOCOLSELECT command for different protocols (Reader)

Protocol	Code	Parameters			Examples of commands
		Byte	Bit	Function	
Field OFF	0x00	0	7:0	RFU	>>>0x02020000
ISO/IEC 15693	0x01	0	7:6	RFU	H 100 S: >>>0x02 02 01 01 H 100 D: >>>0x02 02 01 03 H 10 S: >>>0x02 02 01 05 H 10 D: >>>0x02 02 01 07 L 100 S: >>>0x02 02 01 21 L 100 D: >>>0x02 02 01 23 L 10 S: >>>0x02 02 01 25 L 10 D: >>>0x02 02 01 27 In these examples, the CRC is automatically appended.
			5:4	00: 26 Kbps (H) 01: 52 Kbps 10: 6 Kbps (L) 11: RFU	
			3	0: Respect 312-μs delay 1: Wait for SOF ⁽¹⁾	
			2	0: 100% modulation (100) 1: 10% modulation (10)	
			1	0: Single subcarrier (S) 1: Dual subcarrier (D)	
			0	Append CRC if set to '1'. (1)	
ISO/IEC 14443 Type A	0x02	0	7:6	Transmission data rate 00: 106 Kbps 01: 212 Kbps ⁽²⁾ 10: 424 Kbps 11: RFU	>>>0x02020200: ISO/IEC 14443 Type A tag, 106 Kbps transmission and reception rates, Time interval 86/90 Note that REQA, WUPA, Select20 and Select70 commands use a fixed interval of 86/90 μs between a request and its reply. Other commands use a variable interval with fixed granularity. Refer to the ISO/IEC 14443 standard for more details.
NFC Forum Tag Type 1 (Topaz)			5:4	Reception data rate 00: 106 Kbps 01: 212 Kbps ⁽²⁾ 10: 424 Kbps 11: RFU	
NFC Forum Tag Type 2			3	RFU	
NFC Forum Tag Type 4A			2:0	RFU	
		1, 2		AFDT (Optional) 2 bytes 0xPP 0xMM Set the maximum STRFNCA listening time so that it fits the maximum ISO FWT: 0xPP ≤0x0E, 0x01 ≤0xMM ≤0xFE	Frame Waiting Time (FWT) = $(2^{PP}) * (MM+1) * 4096/13.56 \mu s$ If AFDT is not specified, the default FWT is ~ 86 μs

Table 9. List of <Parameters> values for the PROTOCOLSELECT command for different protocols (Reader) (continued)

Protocol	Code	Parameters			Examples of commands
		Byte	Bit	Function	
ISO/IEC 14443 Type B NFC Forum Tag Type 4B	0x03	0	7:6	Transmission data rate 00: 106 Kbps 01: 212 Kbps 10: 424 Kbps 11: 848 Kbps	>>>0x02020301: ISO/IEC 14443 Type B tag with CRC appended
				Reception data rate 00: 106 Kbps 01: 212 Kbps 10: 424 Kbps 11: 848 Kbps	
			3:1	RFU	
			0	Append CRC if set to '1'. (1)	
		1, 2		AFDT (Optional) 2 bytes 0xPP 0xMM Set the maximum STRFNFCA listening time so that it fits the maximum ISO FWT: 0xPP ≤ 0x0E, 0x01 ≤ 0xMM ≤ 0xFE	Frame Waiting Time (FWT) = $(2^{PP}) * (MM+1) * 4096/13.56 \mu s$ If AFDT is not specified, the default FWT is ~ 4.8 ms ⁽³⁾

Table 9. List of <Parameters> values for the PROTOCOLSELECT command for different protocols (Reader) (continued)

Protocol	Code	Parameters			Examples of commands
		Byte	Bit	Function	
ISO/IEC 18092 NFC Forum Tag Type 3	0x04	0	7:6	Transmission data rate 00: RFU 01: 212 Kbps 10: 424 Kbps 11: RFU	>>>0x02020451: ISO/IEC18092 tag, 212 Kbps transmission and reception rates with CRC appended. Parameter 'Slot counter' is not mandatory. If it is not present, it is assumed that SlotCounter = 0x00 (1 slot) For device detection commands, byte 1 bit 4 must be set to '0'. In this case, the FWT is 2.4 ms for the 1st slot and 1.2 ms more for each following slot, if slot counter is specified.
			5:4	Reception data rate 00: RFU 01: 212 Kbps 10: 424 Kbps 11: RFU	
			3:1	RFU	
			0	Append CRC if set to '1'. (1)	
		1	7:5	RFU	If slot counter = 0x10, the STRNFCA does not respect reply timings, but polls incoming data and searches a valid response during ~8.4 ms.
			4	0: FWT = 2.4 ms 1: FWT is specified by PP:MM bits	
			3:0	Slot counter 0: 1 slot 1: 2 slots ... F: 16 slots	
		2,3		AFDT (Optional) 2 bytes 0xPP 0xMM Set the maximum STRNFCA listening time so that it fits the maximum ISO FWT: 0xPP ≤0x0E, 0x01 ≤0xMM ≤0xFE	Frame Waiting Time (FWT) = $(2^{PP}) * (MM+1) * 4096/13.56 \mu s$ If AFDT is not specified, the default FWT is ~ 302 μs

1. It is recommended to set this bit to '1'.

2. Not characterized.

3. Max TR1 (Synchronization Time as defined in ISO/IEC 14443-2, Type B) supported by the STRNFCA is 170 μs. This value will be increased to 302 μs in the next STRNFCA revision.

Table 10. List of <Parameters> values for different protocols (Card Emulation)

Protocol (Card)	Code	Parameters			Examples of commands Comments
		Byte	Bit	Function	
ISO/IEC 14443 Type A	12	0	7:6	Transmission data rate 00: 106 Kbps 01: 212 Kbps 10: 424 Kbps ⁽¹⁾ 11: RFU	
			5:4	Reception data rate 00: 106 Kbps 01: 212 Kbps 10: 424 Kbps ⁽¹⁾ 11: RFU	
			3	0: Return an error, if no field 1: Wait for field	
			2	RFU	
			1	0: HFO 1: ClkRec	
			0	RFU	
ISO/IEC 14443 Type B	13	0	7:6	Transmission data rate 00: 106 Kbps 01: 212 Kbps 10: 424 Kbps 11: 848 Kbps ⁽¹⁾	
			5:4	Reception data rate 00: 106 Kbps 01: 212 Kbps 10: 424 Kbps 11: 848 Kbps ⁽¹⁾	
			3	0: Return an error, if no field 1: Wait for field	
			2	RFU	
			1	0: HFO 1: ClkRec	
			0	Append CRC if set to '1'.	
ISO/IEC 18092	14	0	7:4	RFU	>>>0x02021403
			3	0: Return an error, if no field 1: Wait for field	
			2	RFU	
			1	0: HFO 1: ClkRec	
			0	Append CRC if set to '1'.	

1. Not qualified for this version.

5.5 Pollfield command (0x03) description

This command returns the current value of the FieldDet flag.

Table 11. POLLFIELD command description

Direction	Data	Comments	Example
Host to STRFNFCA	03	Command code	>>>0x0300
	00	Length of data	
STRFNFCA to Host	00	Result code	<<<0x000101
	01	Length of data	
	<FieldDet>	01, if FieldDet is set	

The result of this command depends on the protocol selected. If we select a Reader mode protocol, the flag FieldDet is set to '1' because the RF field is turned ON by the reader.

Table 12. Response for <POLLFIELD> command

Function	Explanation	Response example			Comments
POLLFIELD	Response	00	01	01	This command returns the current state of the RF field.
	Result code				
	Length of data field				
	[7:1]: RFU 0: Field detected (if set)				

5.6 Send Receive (SendRecv) command (0x04) description

This command sends data to a contactless tag and receives its reply.

Before sending this command, the Host must first send the PROTOCOLSELECT command to select an RF communication protocol.

If the tag response was received and decoded correctly, the <Data> field can contain additional information which is protocol-specific. This is explained in [Table 14](#).

Table 13. SENDRECV command description

Direction	Data	Comments	Example
Host to STRFNFCA	0x04	Command code	See Table 14 and Table 15 for detailed examples.
	<Len>	Length of data	
	<Data>	Data to be sent	
STRFNFCA to Host	0x80	Result code	<<<0x800F5077FE01B3000000000071718EBA00 The tag response is decoded. This is an example of an ISO/IEC 14443 ATQB response (Answer to Request Type B)
	<Len>	Length of data	
	<Data>	Data received. Interpretation depends on protocol	
STRFNFCA to Host	0x90	Result code	<<<0x900400 Exception for 4-bit frames. This function is limited. ACK/NAK always returns '0'. ⁽¹⁾
	0x04	Valid bits	
	ACK or NAK	ISO 14443-A ACK or NAK detection	
STRFNFCA to Host	0x86	Error code	<<<0x8600 Communication error
	0x00	Length of data	
STRFNFCA to Host	0x87	Error code	<<<0x8700 Frame wait time out or no tag
	0x00	Length of data	
STRFNFCA to Host	0x88	Error code	<<<0x8800 Invalid SOF
	0x00	Length of data	
STRFNFCA to Host	0x89	Error code	<<<0x8900 Receive buffer overflow (too many bytes received)
	0x00	Length of data	
STRFNFCA to Host	0x8A	Error code	<<<0x8A00 Framing error (start bit = 0, stop bit = 1)
	0x00	Length of data	
STRFNFCA to Host	0x8B	Error code	<<<0x8B00 EGT time out (for ISO/IEC 14443-B)
	0x00	Length of data	
STRFNFCA to Host	0x8C	Error code	<<<0x8C00 Invalid length. Used in NFC Forum Tag Type 3, when field Length < 3
	0x00	Length of data	
STRFNFCA to Host	0x8D	Error code	<<<0x8D00 CRC error (Used in NFC Forum Tag Type 3 protocol)
	0x00	Length of data	

Table 13. SENDRECV command description (continued)

Direction	Data	Comments	Example
STRFNFCA to Host	0x8E	Error code	<<<0x8E00 Reception lost without EOF received
	0x00	Length of data	

1. ACK/NAK value will be correctly reported in next STRFNFCA revision.

[Table 14](#) gives examples of communication between the STRFNFCA and a contactless tag. The STRFNFCA receives a SendRecv command (>>> 0x04...) from the host and returns its response to the host (<<< 0x80...). [Table 14](#) provides more details on the STRFNFCA response format.

Table 14. List of <Data> Send values for the SENDRECV command for different protocols

Protocol	Explanation	Command example			Comments
ISO/IEC 15693	Send example	04	03	022000	Example of an Inventory command using different protocol configuration: Uplink: 100% ASK, 1/4 coding Downlink: High data rate, Single sub-carrier >>> 0x0403260100 (Inventory - 1 slot) <<< 0x800D0000CDE0406CD62902E0057900 If length of data is '0', only the EOF will be sent. This can be used for an anti-collision procedure.
	Command code				
	Length of entire data field				
	Data				

Table 14. List of <Data> Send values for the SENDRECV command for different protocols (continued)

Protocol	Explanation	Command example				Comments	
ISO/IEC 14443 Type A NFC Forum Tag Type 4A NFC Forum Tag Type 1 (Topaz) NFC Forum Tag Type 2	Send example	04	07	9370800 F8C8E	28	Example of an NFC Forum Type 2 request sequence: >>>0x04022607 (REQA) <<<0x800544002800 (ATQA) >>>0x0403932008 (Anti-collision CL1) <<<0x80088804A8D5F1280000 (UID CL1)...	
	Command code						
	Length of entire data field						
	Data						
						Example of an NFC Forum Type 1 (Topaz) request sequence: >>>0x04022607 (REQA) <<<0x8005000C280000 (ATQ0 ATQ1) >>>0x04087800000000000000A8 (RID) <<<0x800B11486E567A003E450800 00 (Header0 Header1 UID0 UID 1 UID2 UID3 CRC0 CRC1Significant bits indexColbyte IndexColbit)	
						Application SW must specify how many bits to send in the last byte. If flag SplitFrame is set, STRFNFCA will expect 8 – <significant bit count> bits in the 1 st byte during reception. Otherwise it expects 8 bits.	
						This command is useful for anti-collision.	
	ISO/IEC 14443 Type B	Send example	04	03	050000		Example of an NFC Forum Type 4B request sequence: >>>0x0403050000 (REQB) <<<0x800F5077FE01B30000000000 71718EBA00 (ATQB)
	NFC Forum Tag Type 4B	Command code					
		Length of entire data field					
ISO/IEC 18092	Send example	04	05	00FFFF0000		Example of an ISO/IEC 18092 / NFC Forum Type 3request sequence: >>>0x040500FFFF0000 (REQC) <<<0x801201010102148E0DB41310 0B4B428485D0FF00 (ATQC)	
NFC Forum Tag Type 3	Command code						
	Length of entire data field						
	Data						

Table 15. List of <Data> Response values for the SENDRECV command for different protocols

Protocol	Explanation	Response example						Comments
ISO/IEC 15693	Response example	80	08	0000000000	77CF	00		This is a response on Read Single Block command for ISO/IEC 15693 TAG. Actual TAG response is <<<0x000000000077CF, other fields are added by the STRFNFCA.
	Result code							
	Length of entire data field							
	Data received from tag							
	Original (received) value of CRC							
	[7:2]: RFU 1: CRC error if set 0: Collision is detected if set							
ISO/IEC 14443 Type A NFC Forum Tag Type 4A NFC Forum Tag Type 1 (Topaz) NFC Forum Tag Type 2	Response example	80	09	80B30B8DB500	00	00	00	ISO/IEC 14443-A is bit oriented protocol, so we can receive non-integer amount of bytes. Number of significant bits in the 1 st byte is the same as indicated in the command sent. To calculate a position of a collision, application has to take index of byte first. Index of bit indicates a position inside this byte. Note that both indexes start from 0 and bit index can be 8, meaning that collision affected parity. Note that collision information is only valid when bit 'Collision is detected' is set.
	Result code							
	Length of entire data field							
	Data received from TAG							
	7: Collision is detected							
	6: RFU							
	5: CRC error							
	4: parity error							
ISO/IEC 14443 Type B NFC Forum Tag Type 4B	Response example	80	0F	5092036A8D0 00000000071 71	3411		00	
	Result code							
	Length of entire data field							
	Data received from tag							
	Original (received) value of CRC							
	[7:2]: RFU 1: CRC error if set 0: RFU							

Table 15. List of <Data> Response values for the SENDRECV command for different protocols (continued)

Protocol	Explanation	Response example					Comments
ISO/IEC 18092 NFC Forum Tag Type 3	Response example	80	12	01010105017B0...93FF		00	<<<0x801201010105017B06941004014B024F4993FF00
	Result code						
	Length of entire data field						
	Data received from tag						
	[7:2]: RFU 1: CRC error if set 0: RFU						

For more detailed examples of use with NFC Forum and ISO/IEC 15693 tags, refer to [Appendix D on page 62](#).

5.7 Listen command (0x05) description

In Card Emulation mode, this command listens for the command from an external reader. Before sending this command, the application must select a protocol.

Table 16. LISTEN command description

Direction	Data	Comments	Example
Host to STRNFCA	05	Command code	0500: Enters a Listening mode where the STRNFCA waits for a command from an external reader.
	00	Length of data	
STRNFCA to Host	00	Result code	0000 No error. Confirmation that STRNFCA now is in Listening mode
	00	Length of data	
STRNFCA to Host	82	Error code	8200 Invalid command length
	00	Length of data	
STRNFCA to Host	83	Error code	8300 Invalid protocol or protocol is not supported. For example, application selects protocol Iso-15693 using command select protocol and then executes command LISTEN. Iso-15693 is not supported in Card Emulation mode
	00	Length of data	
STRNFCA to Host	8F	Error code	8F00 No field. Command cannot be executed because there is no external field
	00	Length of data	

After reception of the LISTEN command and the return of a 'No error' confirmation, the STRNFCA enters Listening mode. The STRNFCA will exit Listening mode as soon it receives a command from an external reader or the ECHO command (0x55) from the Host Controller (MCU).

In all cases, the STRNFCA will send data or an error code to the Host controller (MCU).

The ECHO command (0x55) allows exiting Listening mode. In response to the ECHO command, the STRFNFCA sends 0x55 + 0x8500 (error code of the Listening state cancelled by the MCU).

Possible return codes are listed in [Table 17](#).

Table 17. Respond codes from the STRFNFCA in Listening mode

Direction	Data	Comments	Example
STRFNFCA to Host	80	Result code	<<<0x800605000071FF00 The request from the Reader is decoded. This is an example of Request in ISO/IEC 14443-B protocol.
	<Len>	Length of data	
	<Data>	Data received. Interpretation depends on protocol	
STRFNFCA to Host	85	Error code	<<<0x8500 Listening mode was cancelled by the application
	00	Length of data	
STRFNFCA to Host	86	Error code	<<<0x8600 Communication error
	00	Length of data	
STRFNFCA to Host	88	Error code	<<<0x8800 Invalid SOF
	00	Length of data	
STRFNFCA to Host	89	Error code	<<<0x8900 Receive buffer overflow (too many bytes received)
	00	Length of data	
STRFNFCA to Host	8A	Error code	<<<0x8A00 Framing error (start bit=0, stop bit=1)
	00	Length of data	
STRFNFCA to Host	8B	Error code	<<<0x8B00 EGT time out (for ISO/IEC 14443-B)
	00	Length of data	
STRFNFCA to Host	8D	Error code	<<<0x8D00 CRC error (Used in NFC Forum Tag Type 3 protocol)
	00	Length of data	
STRFNFCA - MCU	8E	Error code	<<<0x8E00 Reception lost without EOF received
	00	Length of data	

If the request from the Reader was received and decoded correctly, the STRFNFCA will send data back to the Host (Card Emulation application). This is explained in [Table 18](#).

Table 18. Data format sent to the Host in Listening mode

Protocol	Explanation	Response example							Comments
ISO/IEC-14443 Type A	Request example	80	0A	9370800F8C8E	8D	4E01	08		<<<0x80 0A 9370800F8C8E 8D 4E01 08
	Result code								
	Length of entire data field								
	Data received from reader								
	Received value of BCC (if any)								
	Received value of CRC (if any)								
	7: RFU 6: RFU 5: CRC error 4: Parity error 3:0: number of significant bits in last byte								
ISO/IEC-14443 Type B	Request example	80	06	050000	71FF	00			
	Result code								
	Length of entire data field								
	Data received from Reader								
	Original (received) value of CRC								
	7:2: RFU 1: CRC error if set 0: RFU								
ISO/IEC-18092 212/424	Request example	80	06	00FFFF0000	00				<<<0x800600F FFF000000
	Result code								
	Length of entire data field								
	Data received from reader								
	7:2: RFU 1: CRC error if set 0: RFU								

5.8 Send command (0x06) description

This command sends data without waiting for reply.

Before sending this command, the application must select a protocol.

Table 19. SEND command description

Direction	Data	Comments	Example
Host to STRFNFCA	06	Command code	Depends on protocol previously selected! >>>0x040C50920E997500000000B3 7171: Emulation of TAG response in ISO/IEC 14443-B protocol
	<Len>	Length of data	
	<Data>	Data and additional parameter to be sent	
STRFNFCA to Host	00	Result code	<<<0x0000
	00	Length of data	Data was successfully sent
STRFNFCA to Host	82	Error code	<<<0x8200 Invalid length (for example, Length=0 where it is not possible)
	00	Length of data	
STRFNFCA to Host	83	Error code	<<<0x8300 Invalid protocol previously selected by Select Protocol command
	00	Length of data	

Table 20. Format of data to be sent using SEND command

Protocol	Explanation	Response example				Comments
ISO/IEC-14443 Type A	Send example	06	03	0400	08	<<<0x0603040008
	Command code					
	Length of entire data field					
	Data					
	Parameter: 7:6: RFU 5: Append CRC 4: RFU 3:0: Number of significant bits in first byte					
ISO/IEC-14443 Type B	Send example	06	04	01020304		
	Command code					
	Length of entire data field					
	Data					

Table 20. Format of data to be sent using SEND command (continued)

Protocol	Explanation	Response example				Comments
Reader ISO/IEC- 18092 212/424	Send example	06	04	01020304	Note the difference in data in Reader and Card Emulation mode: in Reader mode there is no slot information	
	Command code					
	Length of entire data field					
	Data					
Card ISO/IEC- 18092 212/424	Send example	06	05	01020304	00	If slot number = 0x10, replies immediately
	Command code					
	Length of entire data field					
	Data					
	Parameter: Slot number (in which to reply)					

5.9 Idle command (0x07) description

This command switches the STRNFCA into low consumption mode and defines the way to return to Ready state.

The Result code contains the Wake-up flag register value indicating to the application the wake-up event that caused the device to exit WFE mode.

Table 21. Idle command description

Direction	Data	Comments	Example
Host to STRNFCA	07	Command code	Example of switch from Active mode to Hibernate state: >>>0x07 0E 08 04 00 04 00 18 00 00 00 00 00 00 00 00
	0E	Length of data	
	<WU Source>	Specifies authorized wake-up sources and the LFO frequency	
	EnterCtrlL	Settings to enter WFE mode	Example of switch from Active to WFE mode (wake-up by low pulse on $\overline{\text{IRQ_IN}}$ pin): >>>0x07 0E 08 01 00 38 00 18 00 00 60 00 00 00 00 00
	EnterCtrlH		
	WUCtrlL	Settings to wake-up from WFE mode	
	WUCtrlH	Settings to leave WFE mode (Default value = 0x1800)	
	LeaveCtrlL		
	LeaveCtrlH		
	<WUPeriod>	Period of time between two tag detection bursts. Also used to specify the duration before Timeout.	Example of switch from Active to WFE mode (wake-up by low pulse on SPI_SS pin): >>>0x07 0E 10 01 00 38 00 18 00 00 60 00 00 00 00 00
	<OscStart>	Defines the Wait time for HFO to stabilize: <OscStart> * t_L (Default value = 0x60)	Example of switch from Active mode to WFE mode (Sleep / Field Detector with wake-up by Field Detection) : >>> 0x07 0E 04 01 42 38 00 18 00 00 60 00 00 00 00 00
	<DacStart>	Defines the Wait time for DAC to stabilize: <DacStart> * t_L (Default value = 0x60)	
	<DacDataL>	Lower compare value for tag detection ⁽¹⁾ . This value must be set to 0x00 during tag detection calibration.	
	<DacDataH>	Higher compare value for tag detection ⁽¹⁾ . This is a variable used during tag detection calibration.	Example of switch from Active to Tag Detector mode (wake-up by tag detection or low pulse on $\overline{\text{IRQ_IN}}$ pin) (32 kHz, inactivity duration = 272 ms, DAC oscillator = 3 ms, Swing = 63 pulses of 13.56 MHz): >>>0x07 0E 0A 21 00 79 01 18 00 20 60 60 64 74 3F 08
	<SwingsCnt>	Number of swings HF during tag detection (Default value = 0x3F)	
	<MaxSleep>	Max. number of tag detection trials before Timeout ⁽¹⁾ . This value must be set to 0x01 during tag detection calibration. Also used to specify duration before Timeout. MaxSleep must be: 0x00 < MaxSleep < 0x1F	

Table 21. Idle command description (continued)

Direction	Data	Comments	Example
STRNFCA to Host	0x00	Result code	This response is sent only when STRNFCA exits WFE mode. <<<0x000101 Wake-up by Timeout <<<0x000102 Wake-up by tag detect <<<0x000108 Wake-up by low pulse on IRQ_IN pin
	0x01	Length of data	
	<Data>	Data (Wake-up source): 0x01: Timeout 0x02: Tag detect 0x08: Low pulse on <u>IRQ_IN</u> pin 0x10: Low pulse on <u>SPI_SS</u> pin	
STRNFCA to Host	0x82	Error code	<<<0x8200 Invalid command length
	0x00	Length of data	

1. An initial calibration is necessary to determine DacDataL and DacDataH values required for leaving Tag Detector state. For more information, contact your ST sales office for the corresponding application note.

5.9.1 Idle command parameters

The Idle command (Host to STRNFCA) has the following structure (all values are hexadecimal):

Table 22. Idle command structure

07	0E	xx	yy zz	yy zz	yy zz	aa	bb	cc	dd ee	ff	gg
Command code	Data length	WU source	Enter Control	WU Control	Leave Control	WU Period	Osc Start	DAC Start	DAC Data	Swing Count	Max Sleep

Table 23. Summary of Idle command parameters

Parameter	Description
Command code	This byte is the command code. '07' represents the Idle command. This command switches the device from Active mode to WFE mode.
Data length	This byte is the length of the command in bytes. Its value depends on the following parameter values.
WU Source	This byte defines the authorized wake-up sources in the Wake-up source register. Predefined values are: 0x01: Time out 0x02: Tag Detection 0x04: Field Detector 0x06: Not defined 0x08: Low pulse on <u>IRQ_IN</u> 0x10: Low pulse on <u>SPI_SS</u>
Enter Control	These two bytes (EnterCtrlL and EnterCtrlH) define the resources when entering WFE mode. 0x0400: Hibernate 0x0100: Sleep (or 0x2100 if Timer source is enabled) 0x0142: Sleep (if Field Detector source is enabled) 0xA200: Tag Detector Calibration 0x2100: Tag Detection
WU Control	These two bytes (WuCtrlL and WuCtrlH) define the wake-up resources. 0x0400: Hibernate 0x3800: Sleep/Field Detector 0xF801: Tag Detector Calibration 0x7901: Tag Detection

Table 23. Summary of Idle command parameters (continued)

Parameter	Description
Leave Control	These two bytes (LeaveCtrlL and LeaveCtrlH) define the resources when returning to Ready state. 0x1800: Hibernate 0x1800: Sleep/Field Detector 0x1800: Tag Detector Calibration 0x1800: Tag Detection
WU Period	This byte is the coefficient used to adjust the time allowed between two tag detections. Also used to specify the duration before Timeout. (Typical value: 0x20) $\text{Duration before Timeout} = 256 * t_L * (\text{WU period} + 2) * (\text{MaxSleep} + 1)$
Osc Start	This byte defines the delay for HFO stabilization. (Recommended value: 0x60) Defines the Wait time for HFO to stabilize: $\langle \text{OscStart} \rangle * t_L$
DAC Start	This byte defines the delay for DAC stabilization. (Recommended value: 0x60) Defines the Wait time for DAC to stabilize: $\langle \text{DacStart} \rangle * t_L$
DAC Data	These two bytes (DacDataL and DacDataH) define the lower and higher comparator values, respectively. These values are determined by a calibration process. When using the demo board, these values should be set to approximately 0x64 and 0x74, respectively.
Swing Count	This byte defines the number of HF swings allowed during Tag Detection. (Recommended value: 0x3F)
Max Sleep	This byte defines the maximum number of tag detection trials or the coefficient to adjust the maximum inactivity duration before Timeout. MaxSleep must be: $0x00 < \text{MaxSleep} < 0x1F$ This value must be set to 0x01 during tag detection calibration. Also used to specify duration before Timeout. $\text{Duration before Timeout} = 256 * t_L * (\text{WU period} + 2) * (\text{MaxSleep} + 1)$ (Typical value: 0x28)

5.9.2 Using LFO frequency setting to reduce power consumption

In WFE mode, the high frequency oscillator (HFO) is stopped and most processes being executed are clocked by the low frequency oscillator (LFO). To minimize STRNFCA power consumption in WFE mode, the slower the LFO frequency, the lower the power consumption.

Example 1: Setting a lower LFO frequency

The following equation defines a basic timing reference:

$$t_{REF} = 256 \cdot t_L \text{ ms (where } t_L = 1/f_{LFO})$$

$$t_{\text{REF}} = 8 \text{ ms (when bits [7:6] are set to "00", or 32 kHz)}$$

$$t_{\text{REF}} = 64 \text{ ms (when bits [7:6] are set to "11", or 4 kHz)}$$

5.9.3 Optimizing wake-up conditions

Using the Wake-up source register, it is possible to cumulate sources for a wake-up event. It is strongly recommended to always set an external event as a possible wake-up source.

To cumulate wake-up sources, simply set the corresponding bits in the Wake-up source register. For example, to enable a wake-up when a tag is detected (bit 1 set to '1') or on a low pulse on pin $\overline{\text{IRQ_IN}}$ (bit 3 set to '1'), set the register to 0x0A.

5.9.4 Using various techniques to return to Ready state

The Idle command and reply set offers several benefits to users by enabling various methods to return the STRFNFCAs to Ready state. Some methods are nearly automatic, such as waiting for a timer overflow or a tag detection, but others consume more power compared to the ones requesting a host action. A description of each method follows below.

Default setting: from POR to Ready state

After power-on, the STRFNFCAs enter Power-up state.

To wake up the STRFNFCAs and set it to Ready state, the user must send a low pulse on the $\overline{\text{IRQ_IN}}$ pin. The STRFNFCAs then automatically select the external interface (SPI or UART) and enter Ready state and is able to accept commSands after a delay of approximately 6 ms (t_3).

From Ready state to Hibernate state and back to Ready state

In Hibernate state, most resources are switched off to achieve an ultra-low power consumption.

The only way the STRFNFCAs can wake-up from Hibernate state is by an external event (low pulse on pin $\overline{\text{IRQ_IN}}$).

A basic Idle command is:

```
>>>0x07 0E 08 04 00 04 00 18 00 00 00 00 00 00 00
```

Note: The Wake-up flag value is NOT significant when returning to Ready state from Hibernate state or after a POR.

From Ready state to Sleep state and back to Ready state

Wake-up by external event (low pulse on $\overline{\text{IRQ_IN}}$ or $\overline{\text{SPI_SS}}$ pin)

In Sleep or Power-up states, operating resources are limited in function of the selected wake-up source to achieve a moderate power consumption level.

An Idle command example when wake-up source is pin $\overline{\text{IRQ_IN}}$:

```
>>>0x07 0E 08 01 00 38 00 18 00 00 60 00 00 00 00
```

A similar command can be implemented using pin $\overline{\text{SPI_SS}}$ as a wake-up source:

```
>>>0x07 0E 10 01 00 38 00 18 00 00 60 00 00 00 00
```

Wake-up by Timeout

The LFO is required to use the timer. However, this increases the typical power consumption by 80 μA . Several parameters can be modified to reduce power consumption as much as possible.

The Duration before Timeout is defined by parameters WU period and MaxSleep, respectively 0x60 and 0x08 in the following example.

Duration before Timeout = $256 * t_L * (\text{WU period} + 2) * (\text{MaxSleep} + 1)$

Note: *Note that: $0x00 < \text{MaxSleep} < 0x1F$.*

An Idle command example when wake-up source is timer (0x01) when $f_{LFO} = 32 \text{ kHz}$ (mean power consumption is 25 μA)

```
>>>0x07 0E 01 21 00 38 00 18 00 60 60 00 00 00 00 08
```

An Idle command example when wake-up source is timer (0xC1) when $f_{LFO} = 4 \text{ kHz}$ (mean power consumption is 20 μA):

```
>>>0x07 0E C1 21 00 38 00 18 00 60 60 00 00 00 00 08
```

The same command can be used mixing a timer and the $\overline{\text{IRQ_IN}}$ pin (0xC9) as a wake-up source:

```
>>>0x07 0E C9 21 00 38 00 18 00 60 60 00 00 00 00 08
```

Wake-up by Tag Detection

In this mode, the typical consumption can greatly vary in function of parameter settings (WU period without RF activity and Swing Count defining the RF burst duration). Using default settings, consumption in the range of 100 μA can be achieved.

Tag Detector is a state where STRFNFCA is able to detect an RF event, a wake-up will occur when a tag sufficiently modifies the antenna load and is detected by the STRFNFCA.

An Idle command example when wake-up source is Tag Detection (0x02):

```
>>>0x07 0E 02 21 00 79 01 18 00 20 60 60 64 74 3F 08
```

The same command can be used mixing Tag Detection and the $\overline{\text{IRQ_IN}}$ pin (0x0A) as a wake-up source:

```
>>>0x07 0E 0A 21 00 79 01 18 00 20 60 60 64 74 3F 08
```

The tag detection sequence is defined by dedicated parameters:

- WU source (Byte 3) ([Wake-up source register on page 57](#))
 - The Timeout bit (bit 0) must be set to '1' in order to manage a certain number of emitted bursts. Otherwise, bursts will be sent indefinitely until a stop event occurs (for example, tag detection or a low pulse on pin $\overline{\text{IRQ_IN}}$).
 - The Tag Detect bit (bit 1) must be set to '1' to enable RF burst emissions.
 - It is recommended to also set Bits 3 or 4 to '1' to ensure that it is possible to leave Tag Detect mode via an external event (for example, a low pulse on pin $\overline{\text{IRQ_IN}}$).
- WU period (Byte 10): Defines the period of inactivity (t_{INACTIVE}) between two RF bursts:

$$t_{\text{INACTIVE}} = (\text{WuPeriod} + 2) * t_{\text{REF}}$$
- OscStart, DacStart (Bytes 11 and 12): Define the set-up time of the HFO and Digital Analog Converter, respectively. In general, 3 ms is used both set-up times.

$$\text{HFO | DAC set-up time} = (\text{OscStart | DacStart}) * t_L$$
- DacDataL, DacDataH (Bytes 13 and 14): Reference level for Tag Detection (calculated during the tag detection calibration process).
- SwingsCnt (Byte 15): Represents the number of 13.56-MHz swing allowed during a Tag Detection burst. We recommend using 0x3F.

- Maxsleep (Byte 16): The STRFNFCA emits (MaxSleep + 1) bursts before leaving Tag Detection mode if bit 0 (Timer Out) of the WU source register is set to '1'. Otherwise, when this bit is set to '0', a burst is emitted indefinitely.

Note: Bytes 4 to 9 should be used as shown in the examples in [Section 5.9: Idle command \(0x07\) description](#).

Note that the MaxSleep value is coded on the 5 least significant bits, thus:
 $0x00 < \text{MaxSleep} < 0x1F$.

All the previously described command parameters must be chosen accordingly for the initial tag detection calibration when setting up the STRFNFCA.

Their value will impact tag detection efficiency, and STRFNFCA power consumption during Tag Detection periods.

5.9.5 Tag detection calibration procedure

The Idle command allows the use of a tag detection as a wake-up event. Certain parameters of the Idle command are dedicated to setting the conditions of a tag detection sequence.

During the tag detection sequence, the STRFNFCA regularly emits RF bursts and measures the current in the antenna driver I_{DRIVE} using the internal 6-bit DAC.

When a tag enters the STRFNFCA antenna RF operating volume, it modifies the antenna loading characteristics and induces a change in I_{DRIVE} , and consequently, the DAC data register reports a new value.

This value is then compared to the reference value established during the tag detection calibration process. This enables the STRFNFCA to decide if a tag has entered or not its operating volume.

The reference value (DacDataRef) is established during a tag detection calibration process using the STRFNFCA application setting with no tag in its environment.

The calibration process consists in executing a tag detection sequence using a well-known configuration, with no tag within the antenna RF operating volume, to determine a specific reference value (DacDataRef) that will be reused by the host to define the tag detection parameters (DacDataL and DacDataH).

During the calibration process, DacDataL is forced to 0x00 and the software successively varies the DacDataH value from its maximum value (0xFE) to its minimum value (0x00). At the end of the calibration process, DacDataRef will correspond to the value of DacDataH for which the wake-up event switches from Timeout (no tag in the RF field) to tag detected.

To avoid too much sensitivity of the tag detection process, we recommend using a guard band. This value corresponds to 2 DAC steps (0x08).

Recommended guard band value:

$$\text{DacDataL} = \text{DacDataRef} - \text{Guard} \text{ and } \text{DacDataH} = \text{DacDataRef} + \text{Guard}$$

The parameters used to define the tag detection calibration sequence (clocking, set-up time, burst duration, etc.) must be the same as those used for the future tag detection sequences.

When executing a tag detection sequence, the STRFNFCA compares the DAC data register value to the DAC Data parameter values (DacDataL and DacDataH) included in the Idle command. The STRFNFCA will exit WFE mode through a Tag Detection event if the DAC data register value is greater than the DAC Data parameter high value (DacDataH) or less than the DAC Data parameter low value (DacDataL). Otherwise, it will return to Ready state after a Timeout.

An efficient 8-step calibration algorithm is described in [Example of tag detection calibration process on page 58](#).

An example of a basic Idle command used during the Tag Detection Calibration process:

```
>>>0x07 0E 03 A1 00 F8 01 18 00 20 60 60 00 xx 3F 01
```

where xx is the DacDataH value.

An example of a tag detection sequence is provided in [Example of tag detection command using results of tag detection calibration on page 61](#).

5.10 Read Register (RdReg) command (0x08) description

This command is used to read the Wakeup register.

Table 24. RDREG command description

Direction	Data	Comments	Example
Host to STRFNFCA	0x08	Command code	Ex 1. >>>0x0803690100 Reads the ARC_B register. ⁽¹⁾
	0x03	Length of data	
	0x62 or 0x69	Register address	
	0x01	Register size	
	0x00	ST Reserved	
STRFNFCA to Host	0x00	Result code	<<<0x000113 Depth = 1, Gain = 3 (Ex. 2)
	<Len>	Length of data (= RegCount)	
	<RegData>	Register data	
STRFNFCA to Host	0x82	Error code	<<<0x8200 Invalid command length
	0x00	Length of data	

1. This command must be preceded by the setting of the ARC_B register index (0x0903680001) .

Note: *The Management of the Analog Register Configuration register (ARC_B) is described in [Section 5.11: Write Register \(WrReg\) command \(0x09\) description](#).*

5.11 Write Register (WrReg) command (0x09) description

The Write Register (WRREG) command (0x09) is used to:

- set the Analog Register Configuration address index value before reading or overwriting the Analog Register Configuration register (ARC_B) value
- set the Timer Window (TimerW) value used to improve STRFNFCA demodulation when communicating with ISO/IEC 14443 Type A tags
- set the AutoDetect Filter used to help synchronization of STRFNFCA with ISO/IEC 18092 tags
- configure the HF2RF bit^(a) to manage I_{CC} RF (V_{PS_TX}) consumption in Ready state

a. When the HF2RF bit is '0', Reader mode is possible (default mode). When set to '1', V_{PS_TX} power consumption is reduced (Ready mode).

5.11.1 Improving RF performance

Adjusting the Modulation Index and Receiver Gain parameters helps adjust application behavior. These parameters are the two nibbles of the Analog Register Configuration register (ARC_B).

The default value of these parameters ([Table 28](#)) is set by the PROTOCOLSELECT command, but they can be overwritten using the Write Register (WRREG) command (0x09). [Table 26](#) and [Table 27](#) list possible values for the Modulation Index and Receiver Gain parameters respectively.

This new configuration is valid until a new PROTOCOLSELECT or Write Register (of register ARC_B) command is executed. Register values are cleared at power off.

Table 25. WRREG command description (Modulation Index and Receiver Gain)

Direction	Data	Comments	Example
Host to STRNFCA	0x09	Command code	>>>0x090468010113 Update ARC_B value to 0x13 >>>0x0903680001 Set Analog Register Index to 0x01 (ARC_B) ⁽¹⁾
	0x03 or 0x04	Length of data	
	0x68	Analog Register Configuration address index	
	0x00 or 0x01	Flag Increment address or not after Write command	
	0x01	Index pointing to the Modulation Index and Receiver Gain values in ARC_B register (0x01) (See Section 5.11.1)	
	0xXX	New value for Modulation Index and Receiver Gain nibbles (See Section 5.11.1)	
STRNFCA to Host	0x00	Result code	<<<0x0000
	0x00	Length of data (= RegCount)	Register written

1. This command must be executed before reading the ARC_B register (0x0803690100).

How to modify Analog Register Configuration register (ARC_B) values

1. Use the PROTOCOLSELECT command (0x02) to select the correct communication protocol.

For example, to select the ISO/IEC 18092 protocol:

```
Send PROTOCOLSELECT command: >>>0x02020451
STRNFCA reply: <<<0x0000
```

2. Read the Analog Register Configuration register (ARC_B) value.

```
a) Write the ARC_B register index at 0x01: >>>0x0903680001
STRNFCA reply: <<<0x0000
b) Read the ARC_B register value: >>>0x0803690100
STRNFCA reply: <<<0x015F
```

In this example, the ARC_B register value is 0x5F, where “5” is the Modulation Index and “F” is the Receiver Gain.

3. Modify the Modulation Index and Receiver Gain values with 0x23.

```
Write the ARC_B register index: >>>0x090468010123
STRNFCA reply: <<<0x0000
```

4. Read the Analog Configuration register (ARC_B) value.
 - a) Write the ARC_B register index at 0x01: >>>0x0903680001
STRFNFCA reply: <<<0x0000
 - b) Read the ARC_B register value: >>>0x0803690100
STRFNFCA reply: <<<0x0123

Modulation Index and Receiver Gain values

Table 26. Possible Modulation Index values

Code	1	2	3	4	5	6	D
Modulation Index ⁽¹⁾	10%	17%	25%	30%	33%	36%	95%

1. Characterized only using ISO/IEC 10373 test set-up.

Table 27. Possible Receiver Gain values

Code	0	1	3	7	F
Receiver Gain ⁽¹⁾	34 dB	32 dB	27 dB	20 dB	8 dB

1. Characterized by design simulation.

Default code per protocol

Table 28. Default code for available reader protocols

Communication protocol	Default value	Recommended values for STRFNFCA demo board	Possible Modulation Index values (MS nibble)	Possible Receiver Gain values (LS nibble)
ISO/IEC 14443 Type A reader	0xDF	0xD7	0xD	0x0, 0x1, 0x3, 0x7 or 0xF
ISO/IEC 14443 Type B reader	0x2F	0x37	0x1, 0x2, 0x3 or 0x4	0x0, 0x1, 0x3, 0x7 or 0xF
ISO/IEC 18092 reader	0x5F	0x23	0x1, 0x2, 0x3 or 0x4	0x0, 0x1, 0x3, 0x7 or 0xF
ISO/IEC 15693 reader 30%	0x53	0x53	0x4, 0x5 or 0x6	0x0, 0x1, 0x3, 0x7 or 0xF
ISO/IEC 15693 reader 100%	0xD3	0xD3	0xD	0x0, 0x1, 0x3, 0x7 or 0xF

5.11.2 Improving frame reception for ISO/IEC 14443 Type A tags

To improve STRFNFCA demodulation when communicating with ISO/IEC 14443 Type A tags, it is possible to adjust the synchronization between digital and analog inputs by fine-tuning the Timer Window (TimerW) value. This can be done using the Write Register (WRREG) command to set a new TimerW value (min. 0x50, max. 0x60). The recommended value is 0x56 or 0x58 when using the STRFNFCA demo board.

The default value of this parameter (0x52) is set by the PROTOCOLSELECT command, but it can be overwritten using the WRREG command (0x09).

Table 29. WRREG command description (Timer Window)

Direction	Data	Comments	Example
Host to STRNFCA	0x09	Command code	>>>0x09043A005804 Set recommended TimerW value.
	0x03 or 0x04	Length of data	
	0x3A	Timer Window (TimerW) value	
	0x00 or 0x01	Flag Increment address or not after Write command	
	0xXX	Set TimerW value (recommended value is 0x56 or 0x58)	
	0x04	TimerW value confirmation	
STRNFCA to Host	0x00	Result code	<<<0x0000
	0x00	Length of data (= RegCount)	Register written

5.11.3 Improving RF reception for ISO/IEC 18092 tags

To improve STRNFCA reception when communicating with ISO/IEC 18092 tags, it is possible to enable an AutoDetect filter to synchronize ISO/IEC 18092 tags with the STRNFCA. This can be done using the Write Register (WRREG) command to enable the AutoDetect filter.

By default, this filter is disabled after the execution of the PROTOCOLSELECT command, but it can be enabled using the WRREG command (0x09).

Table 30. WRREG command description (AutoDetect Filter)

Direction	Data	Comments	Example
Host to STRNFCA	0x09	Command code	>>>0x09040A0102A1 Enable the AutoDetect filter.
	0x03 or 0x04	Length of data	
	0x0A	AutoDetect filter control value	
	0x00 or 0x01	Flag Increment address or not after Write command	
	0x02	AutoDetect filter enable	
	0xA1	AutoDetect filter confirmation	
STRNFCA to Host	0x00	Result code	<<<0x0000
	0x00	Length of data (= RegCount)	Register written

5.11.4 Managing V_{PS_TX} consumption in Ready state

In Ready state, $I_{CC\ RF}$ (V_{PS_TX}) consumption is generally in the range of 200 μA (maximum).

This consumption can be reduced to approximately 2 μA (typical) by setting a control bit (bit HF2RF) to '1' using the Write Register (WRREG) command. In this case, Reader mode is no longer available.

To re-enable Reader mode, set the HF2RF bit to '0' using the WRREG command or execute a new PROTOCOLSELECT command.

Table 31. WRREG command description (HF2RF bit)

Direction	Data	Comments	Example
Host to STRFNFCA	0x09	Command code	<p>>>>0x090468010710</p> <p>$I_{CC\ RF}$ (V_{PS_TX}) consumption is reduced to approx. 2 μA (typ.) In this case, Reader mode is not available.</p> <p>>>>0x090468010700</p> <p>Reset the HF2RF bit to '0' to re-enable Reader mode.</p>
	0x03 or 0x04	Length of data	
	0x68	Analog Register Configuration address index	
	0x00 or 0x01	Flag Increment address or not after Write command	
	0x07	Index pointing to the HF2RF register	
	0x00 or 0x10	Set the HF2RF bit to '1' (Reader mode is not enabled) or Reset the HF2RF bit to '0' (Reader mode is enabled) (default value)	
STRFNFCA to Host	0x00	Result code	<<<0x0000
	0x00	Length of data (= RegCount)	Register written

5.12 BaudRate command (0x0A) description

This command changes the UART baud rate.

Table 32. BAUDRATE command description

Direction	Data	Comments	Example
Host to STRFNFCA	0x0A	Command code	
	0x01	Length of data	
	<BaudRate>	New Baud Rate = $13.56 / (2^{*} \text{<BaudRate>} + 2)$ Mbps Baud rate 255: 13.56/512 ~26.48 Kbps 254: 13.56/510 ~26.59 Kbps 253: 13.56/508 ~26.7 Kbps ... 117: 13.56/236 ~57.7 Kbps (Value after power-up) ... 2: 13.56/6 ~2.26 Mbps 1: RFU 0: RFU	
STRFNFCA to Host	0x55	ECHOCODE response of 0x55	<<<0x55 New baud rate is used to reply

Caution: If the BaudRate command is not correctly executed, the baud rate value will remain unchanged.

5.13 AcFilter command (0x0D) description

This command activates/deactivates the anti-collision filter in Type A Card Emulation mode.

Table 33. Activate/deactivate anti-collision filter command description

Direction	Data	Comments	Example
Host to STRFNFCA	0D	Command code	>>>0x0D00: deactivate filter >>>0x0D0A00AA8804485BA1120000 Activate filter for 2-cascade anti-collision Note that length can be: 7: for 1-cascade level filter 11: for 2-cascade levels filter 15: for 3-cascade levels filter All other values will cause 'Invalid command length' error.
	<Len>	Length of data	
	<ATQA>	Unused and proprietary bits of SAK (protocol bits will be handled by firmware)	
	<SAK>	Unused and proprietary bits of SAK (protocol bits will be handled by firmware)	
	<UID part 1>	UID for cascade level 1 (Mandatory)	
	<UID part 2>	UID for cascade level 2 (Optional)	
	<UID part 3>	UID for cascade level 3 (Optional)	
STRFNFCA to Host	00	Result code	<<<0x0000
	00	Length of data = 0	Filter is successfully activated/deactivated
STRFNFCA to Host	82	Error code	<<<0x8200
	00	Length of data	Invalid command length <<<0x8300 Invalid protocol

The ACFILTER command activates or deactivates an anti-collision filter for ISO/IEC 14443A card protocol.

If the filter is not activated, all received commands will be sent to external microcontroller.

If the filter is activated, internal firmware will try to interpret commands sent by the reader itself and perform an anti-collision sequence. Data will not be sent to the external MCU during anti-collision phase. It will only be sent when anti-collision is finished and STRFNFCA is selected to perform Level 4 of ISO/IEC 14443 A protocol.

The STRFNFCA is able to interpret and respond to the following commands:

Table 34. Commands to which device is able to respond

Command	Code	Definition
SENS_REQ	26 (7-bit)	Sense request
ALL_REQ	52 (7-bit)	wakeup all request
SDD_REQ	93, 95, 97	Single device detection request
SEL_REQ	9370, 9570, 9770	Select request

If the Len field is '1', this function forces the STRFNFCA to enter to 'Halt' state. If Len is '0', this function returns the actual state.

5.14 Echo command (0x55) description

The ECHO command verifies the possibility of communication between a Host and the STRFNFCA. This command also allows exiting Listening mode without an error when the STRFNFCA has received a Listen command.

Table 35. ECHO command description

Direction	Data	Comments	Example
Host to STRFNFCA	0x55	Command code	
STRFNFCA to Host	0x55	Code response	>>> 0x55: Sends an ECHO command <<< 0x55: Response to an ECHO command

6 Electrical characteristics

6.1 Absolute maximum ratings

Table 36. Absolute maximum ratings

Symbol	Parameter	Value	Unit
VPS_Main	Supply voltage	−0.3 to 7.0	V
VPS_TX	Supply voltage (RF drivers)	−0.3 to 7.0	V
V _{IO}	Input or output voltage relative to ground	−0.3 to VPS_Main +0.3	V
V _{MaxCarrier}	Maximum input voltage (pins RX1 and RX2)	±14.0	V
T _A	Ambient operating temperature	−25 to +85	°C
	Ambient operating temperature (RF mode)	−25 to +85	
T _{STG}	Storage temperature (Please also refer to package specification).	−65 to +150	°C
V _{ESD}	Electrostatic discharge voltage according to JESD22-A114, Human Body Model	2000	V
P _{TOT} ⁽¹⁾	Total power dissipation per package	1	W

1. Depending on the thermal resistance of package.

Note: *Stresses listed above may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.*

6.2 DC characteristics

Table 37. DC characteristics (VPS_Main = 3V±10% and VPS_TX = 3V±10%)

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
VPS_Main	Supply voltage		2.7	3.0	3.3	V
VPS_TX	Supply voltage (RF drivers)		2.7	3.0	3.3	V
V _{IL}	Input low voltage (I/Os)		0		0.2 x VPS_Main	V
V _{IH}	Input high voltage (I/Os)		0.7 x VPS_Main		VPS_Main	V
V _{OH}	Output high voltage (I/Os)	I _{OH} = - 8 µA	0.7 x VPS_Main		VPS_Main	V
V _{OL}	Output low voltage (I/Os)	I _{OLMAX} = 500 µA	0		0.15 x VPS_Main	V
POR	Power-on reset voltage			1.8		V

Table 38. DC characteristics (VPS_Main = 3V±10% and VPS_TX = 5V±10%)

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
VPS_Main	Supply voltage		2.7	3.0	3.3	V
VPS_TX	Supply voltage (RF drivers)		4.5	5.0	5.5	V
V _{IL}	Input low voltage (I/Os)		0		0.2 x VPS_Main	V
V _{IH}	Input high voltage (I/Os)		0.7 x VPS_Main		VPS_Main	V
V _{OH}	Output high voltage (I/Os)	I _{OH} = - 8 µA	0.7 x VPS_Main		VPS_Main	V
V _{OL}	Output low voltage (I/Os)	I _{OLMAX} = 500 µA	0		0.15 x VPS_Main	V
POR	Power-on reset voltage			1.8		V

6.3 Power consumption characteristics

$T_A = -25^{\circ}\text{C}$ to 85°C , unless otherwise specified.

Table 39. Power consumption characteristics (VPS_Main from 2.7 to 3.3 V)

Symbol	Parameter	Condition	Typ.	Max.	Unit
$I_{CC}(V_{PS})$ Power-up	Supply current in power-up state	$T_A = 25^{\circ}\text{C}$	200	600	μA
$I_{CC}(V_{PS})$ Card Emulation	Supply current in Card Emulation mode	$T_A = 25^{\circ}\text{C}$	2.5	5.0	mA
$I_{CC}(V_{PS})$ Hibernate	Supply current in Hibernate state	$T_A = 25^{\circ}\text{C}$	1	5	μA
$I_{CC}(V_{PS})$ Sleep/Field Detector Detector	Supply current in Sleep/Field Detector state	$T_A = 25^{\circ}\text{C}$	20/25	80	μA
$I_{CC}(V_{PS})$ Ready	Supply current in Ready state	$T_A = 25^{\circ}\text{C}$	2.5	5.0	mA
$I_{CC}(V_{PS})$ Tag Detect	Average supply current in Tag Detector state	$T_A = 25^{\circ}\text{C}$, 4 RF bursts per second	50	100	μA

The STRFNFCA supports two VPS_TX supply ranges for RF drivers: 2.7V to 3.3V or 4.5V to 5.5V. Antenna matching circuit must be defined accordingly.

Table 40. Power consumption characteristics (VPS_TX from 2.7 to 3.3 V)

Symbol	Parameter	Condition	Typ.	Max.	Unit
$I_{CC\text{ RF}}(V_{PS_TX})$ RF Field ON	Supply current in RF Field (Reader mode) ⁽¹⁾	$T_A = 25^{\circ}\text{C}$	70	100	mA
$I_{CC\text{ RF}}(V_{PS_TX})$ RF Field OFF	Supply current in RF Field (Ready mode) ⁽²⁾	$T_A = 25^{\circ}\text{C}$		200	μA
$I_{CC\text{ RF}}(V_{PS_TX})$ Tag Detect	Peak ⁽³⁾ current during Burst detection	$T_A = 25^{\circ}\text{C}$	70	100	mA

1. Parameter measured using recommended output matching network. (Z load is $27\ \Omega$ and 0°).
2. This consumption can be reduced to approximately $2\ \mu\text{A}$ (typ.) by setting a control bit (bit HF2RF) to '1' using command 090468010710. In this case, Reader mode is not available.
To re-enable Reader mode, reset the HF2RF bit to '0' using the command 090468010700 or execute a new PROTOCOLSELECT command.
3. The maximum differential input voltage between pins RX1 and RX2 (VRx1-Rx2) has a peak-peak of 18 V.

Table 41. Power consumption characteristics (VPS_TX from 4.5 to 5.5 V)

Symbol	Parameter	Condition	Typ.	Max.	Unit
$I_{CC\text{ RF}}(V_{PS_TX})$ RF Field ON	Supply current in RF Field (Reader mode) ⁽¹⁾	$T_A = 25^{\circ}\text{C}$	120	200	mA
$I_{CC\text{ RF}}(V_{PS_TX})$ RF Field OFF	Supply current in RF Field (Ready mode) ⁽²⁾	$T_A = 25^{\circ}\text{C}$		300	μA
$I_{CC\text{ RF}}(V_{PS_TX})$ Tag Detect	Peak ⁽³⁾ current during Burst detection	$T_A = 25^{\circ}\text{C}$	120	200	mA

1. Parameter measured using recommended output matching network. (Z load is $16\ \Omega$ and 0°).

2. This consumption can be reduced to approximately 2 μ A (typ.) by setting a control bit (bit HF2RF) to '1' using command 090468010710. In this case, Reader mode is not available.
To re-enable Reader mode, reset the HF2RF bit to '0' using the command 090468010700 or execute a new PROTOCOLSELECT command.
3. The maximum differential input voltage between pins RX1 and RX2 (VRx1-Rx2) has a peak-peak of 18 V. This voltage can be limited by adding a damping resistor in parallel of the antenna or between ST_R0 and Ground.

6.4 SPI characteristics

The STRFNFCA supports (CPOL = 0, CPHA = 0) and (CPOL = 1, CPHA = 1) modes.

Table 42. SPI interface characteristics

Symbol	Parameter	Condition	Min.	Max.	Unit
f_{SCK} 1/ $t_{c(SCK)}$	SPI clock frequency			2.0	MHz
V_{IL}	Input low voltage			0.3	V_{PS}
V_{IH}	Input high voltage		0.7		
V_{OL}	Output low voltage			0.4	
V_{OH}	Output high voltage		0.7		
$t_{SU(NSS)}^{(1)}$	NSS setup time		70		ns
$t_{h(NSS)}^{(1)}$	NSS hold time		0		
$t_{CH(SCKL)}^{(1)}$	Clock low time		200		ns
$t_{CH(SCKH)}^{(1)}$	Clock high time		200		
$t_{SU(SI)}^{(1)}$	Data slave Input setup time		20		ns
$t_{h(SI)}^{(1)}$	Data slave Input hold time		80		
$t_{v(SO)}^{(1)}$	Data slave output valid time			80	ns
$t_{h(SO)}^{(1)}$	Data slave output hold time	After enable edge	0		
$C_{b_SPI_IN}$	Capacitive load for input pins NSS, CLK, MOSI			3	pF
$C_{b_SPI_OUT}$	Capacitive load for input pins MOSI			20	pF

1. Values based on design simulation and/or characterization results, and not on tested in production.

Figure 12. SPI timing diagram (Slave mode and CPOL = 0, CPHA = 0)


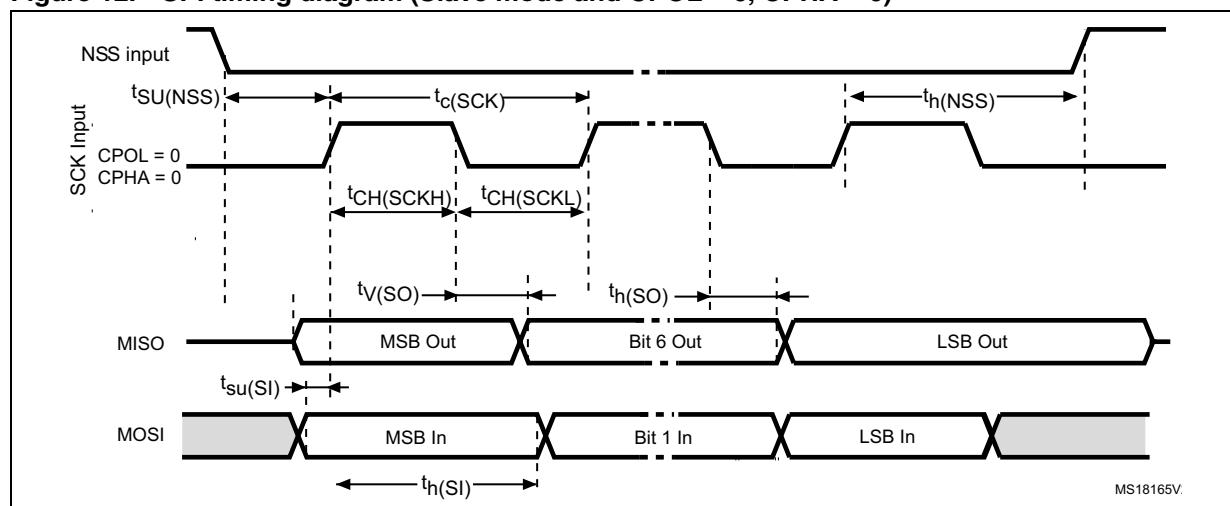


Figure 13. SPI timing diagram (Slave mode and CPOL = 1, CPHA = 1)

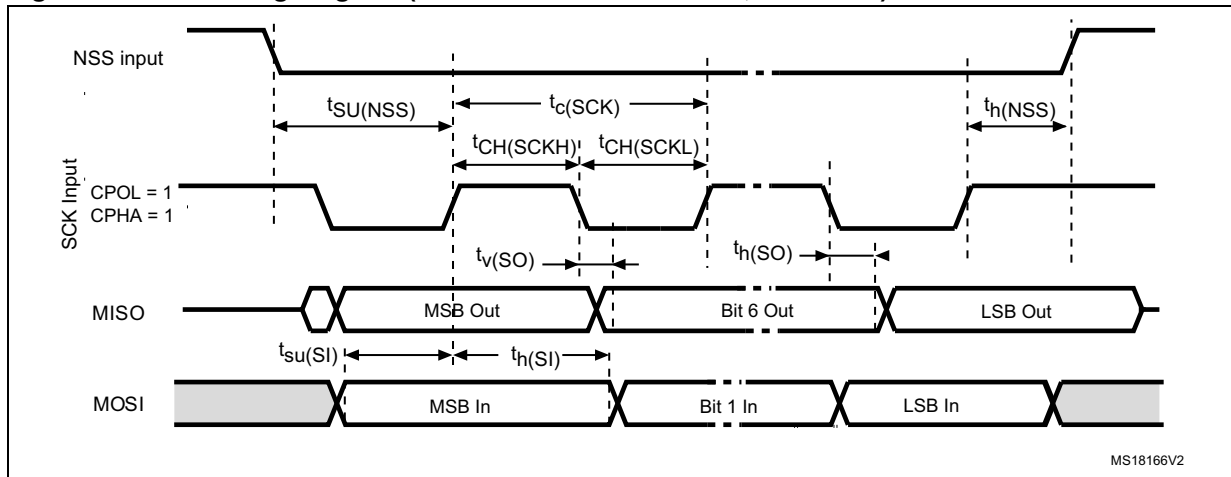

6.5 RF characteristics

Test conditions are $T_A = 0^{\circ}\text{C}$ to 50°C , unless otherwise specified.
 $V_{PS_TX} = 3V \pm 10\%$ and $V_{PS_MAIN} = 3V \pm 10\%$.

Table 43. Tag/Card Emulation characteristics

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
f_C	Frequency of operating field (carrier frequency)		13.553	13.56	13.567	MHz
MI Carrier	Carrier Modulation Index from reader					
	ISO/IEC 14443 -Type A		8	-	100	%
	ISO/IEC 14443 -Type B		10	10	14	
	ISO/IEC 18092				100	
HField ⁽¹⁾	Operating field strength in ISO/IEC 14443		1.5		7.5	A/m
HField ⁽¹⁾	Operating field strength in ISO/IEC 18092		1.5		7.5	A/m
$V_{MaxCarrier}$	Input voltage between RX1 and RX2				18	V
f_S ⁽²⁾	Frequency of Subcarrier modulation (ISO/IEC 14443, ISO/IEC 15693 and ISO/IEC 18092)				$f_C / 16$	
ALoad	Load Modulation Amplitude $f_C + f_S$ $f_C - f_S$	ISO 10373-6 test methods for ISO/IEC 14443-B @ 1.5 A/m	18 18			mV
	$f_C + f_S$ $f_C - f_S$	ISO 10373-6 test methods for ISO/IEC 14443-B @ 7.5 A/m	8 8			mV
ALoad	Load Modulation Amplitude $f_C + f_S$ $f_C - f_S$	ISO 10373-6 test methods for ISO/IEC 14443-A @ 1.5 A/m	18 18			mV
	$f_C + f_S$ $f_C - f_S$	ISO 10373-6 test methods for ISO/IEC 14443-A @ 7.5A/m	8 8			mV
ALoad	Load Modulation Amplitude $f_C + f_S$ $f_C - f_S$	ECMA 356 test methods for ECMA 340 @ 1.5 A/m	18 18			mV
	$f_C + f_S$ $f_C - f_S$	ECMA 356 test methods for ECMA 340 @ 7.5 A/m	8 8			mV
DataR	ISO/IEC 14443 Type A		106		212	Kbps
	ISO/IEC 14443 Type B		106		424	
	ISO/IEC 18092		106		424	

1. Maximum values based on design simulation and/or characterization results, and not tested in production.

2. Parameter measured on samples using recommended output matching network. (Z load is 27 Ohm and 0°.)

Table 44. Field detection characteristics

Symbol	Parameter	Min.	Typ.	Max.	Unit
	Level of detection ⁽¹⁾	0.5		8	A/m

1. Parameter measured using recommended output matching network for ISO/IEC 14443 communication.

Table 45. Reader characteristics

Symbol	Parameter	Min.	Typ.	Max.	Unit
f _C	Frequency of operating field (carrier frequency)	13.553	13.56	13. 567	MHz
MI Carrier	Carrier modulation index ⁽¹⁾ ISO/IEC 14443-A			100	%

- Maximum values based on design simulation and/or characterization results, and not tested in production.
- Parameter measured on samples using recommended output matching network. (Z load is 27 Ω and 0°.)
- This voltage can be limited by adding a damping resistor in parallel of the antenna or between ST_R0 and Ground.
- Based on ISO/IEC 10373-6 protocol measurement. The reader sensitivity corresponds to the load modulation value of the REQ reply sent by an ISO reference card when decoded by the STRFNFCA.

6.6 Oscillator characteristics

The external crystal used for this product is a 27.12 MHz crystal with an accuracy of ± 14 kHz.


Table 46. HFO 27.12 MHz oscillator characteristics^{(1) (2)}

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
f_{XTAL}	Oscillator frequency			27.12		MHz
R_F	Feedback resistor			2		M Ω
C	Recommended load capacitance versus equivalent serial resistance of the crystal (R_S) ⁽³⁾	$R_S = 30 \Omega$		6		pF
$t_{SU(HFO)}$ ⁽⁴⁾	Startup time	V_{PS} is stabilized		6	10	ms

1. Resonator characteristics given by the crystal/ceramic resonator manufacturer.
2. Based on characterization, not tested in production.
3. The relatively low value of the R_F resistor offers a good protection against issues resulting from use in a humid environment, due to the induced leakage and the bias condition change. However, it is recommended to take this point into account if the Host is used in tough humidity conditions.
4. $t_{SU(HFO)}$ is the startup time measured from the moment it is enabled (by software) to a stabilized 27.12 MHz oscillation is reached. This value is measured for a standard crystal resonator and it can vary significantly with the crystal manufacturer.

For C_{L1} and C_{L2} , it is recommended to use high-quality external ceramic capacitors in the 10 pF to 20 pF range (typ.), designed for high-frequency applications, and selected to match the requirements of the crystal or resonator (see [Figure 14](#)). C_{L1} and C_{L2} are usually the same size. The crystal manufacturer typically specifies a load capacitance which is the series combination of C_{L1} and C_{L2} .

Figure 14. Typical application with a 27.12 MHz crystal

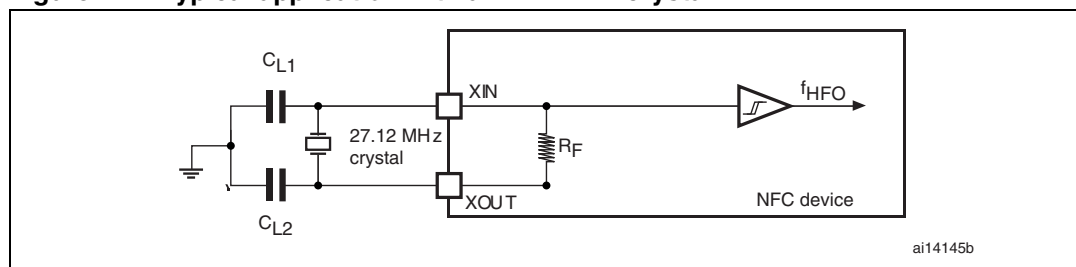

Note:

For C_{L1} and C_{L2} it is recommended to use high-quality ceramic capacitors in the 10 pF to 20 pF range selected to match the requirements of the crystal or resonator. C_{L1} and C_{L2} are usually the same size. The crystal manufacturer typically specifies a load capacitance which is the series combination of C_{L1} and C_{L2} . Load capacitance C_L has the following formula: $C_L = C_{L1} \times C_{L2} / (C_{L1} + C_{L2}) + C_{stray}$ where C_{stray} is the pin capacitance and board or trace PCB-related capacitance. Typically, it is between 2 pF and 7 pF.

7 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK[®] is an ST trademark.

This device is available in a 32-lead, 5x5 mm, 0.5 mm pitch, very thin fine pitch quad flat pack no-lead package (VFQFPN).

Figure 15. 32-lead VFQFPN package outline

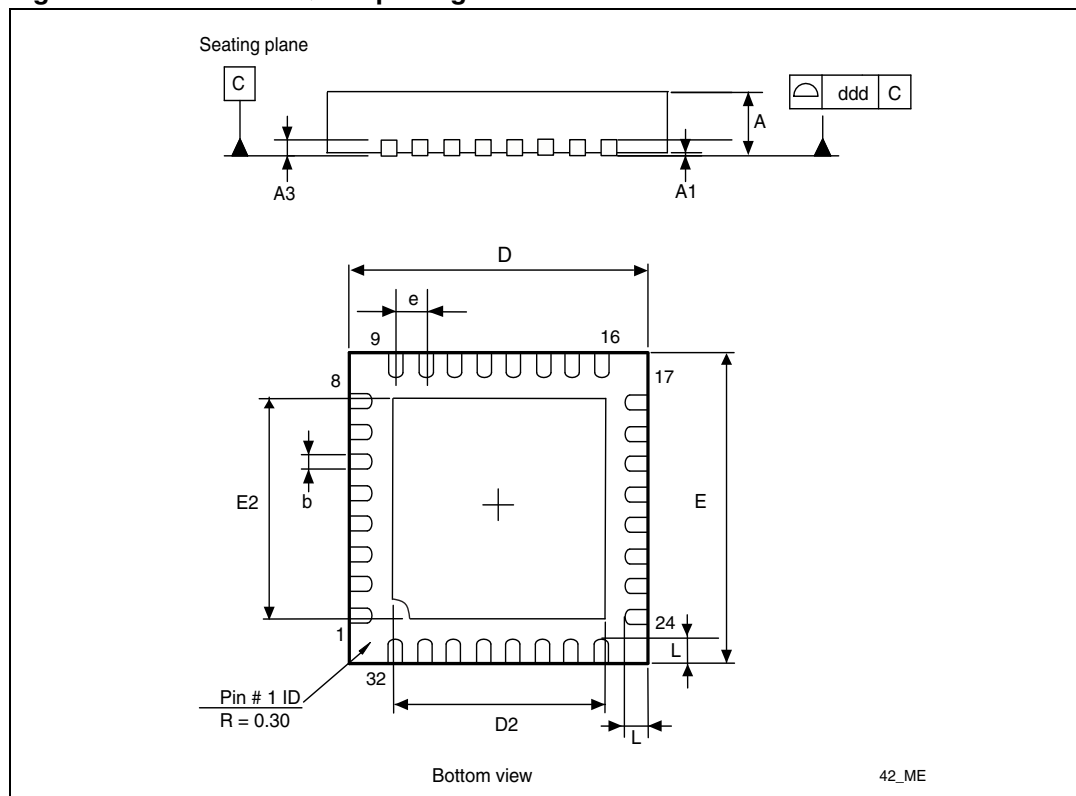


Table 47. 32-pin VFQFPN package mechanical data

Symbol	millimeters			inches ⁽¹⁾			Note
	Min.	Typ.	Max.	Min.	Typ.	Max.	
A	0.800	0.900	1.000	0.0315	0.0354	0.0394	
A1	0.000	0.020	0.050	0.0000	0.0008	0.0020	
A3		0.200			0.0079		
b	0.180	0.250	0.300	0.0071	0.0098	0.0118	
D	4.850	5.000	5.150	0.1909	0.1969	0.2028	
D2 (AMK_B)	3.500	3.600	3.700	0.1378	0.1417	0.1457	1
E	4.850	5.000	5.150	0.1909	0.1969	0.2028	
E2 (AMK_B)	3.500	3.600	3.700	0.1378	0.1417	0.1457	1
e		0.500			0.0197		

Table 47. 32-pin VFQFPN package mechanical data (continued)

Symbol	millimeters			inches ⁽¹⁾			Note
	Min.	Typ.	Max.	Min.	Typ.	Max.	
L	0.300	0.400	0.500	0.0118	0.0157	0.0197	
ddd (AMK)			0.050			0.0020	2

1. Values in inches are rounded to 4 decimal digits.

Note: 1 AMKOR Variation B. Dimensions are not in accordance with JEDEC.
2 AMKOR.

Appendix A Additional Idle command description

This section provides examples of use for the IDLE command.

The wake-up source is the third of the 16 bytes in the IDLE command. This byte specifies authorized Wake-up events. This revision now also provides the capability to set the LFO frequency in WFE mode.

The LFO frequency and the authorized wake-up source settings are stored in the Wake-up source register as the parameters of the IDLE command.

The Wake-up event is updated by the STRFNFCA when it exits WFE mode.

The contents of the Wake-up event register can be read using the Read Register command or in the STRFNFCA reply to the Idle command.

Table 48. Wake-up source register

Bits [7:6]	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
LFO frequency	RFU ⁽¹⁾	IRQ on pin SPI_SS	IRQ on pin IRQ_IN	Field Detect	Tag Detect	Timeout

1. Must be set to '0'.

Table 49. Wake-up event register

Bits [7:6]	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
LFO frequency	RFU	IRQ on pin SPI_SS	IRQ on pin IRQ_IN	Field Detect	Tag Detect	Timeout

Bits [7:6] define the LFO frequency (f_{LFO}):

00: 32 kHz 01: 16 kHz
10: 8 kHz 11: 4 kHz

Bit 4: When set, the STRFNFCA will wake up when an external interrupt (low level on pin SPI_SS) is detected. This is useful for UART communication.

Bit 3: When set, the STRFNFCA will wake up when an external interrupt (low level on pin IRQ_IN) is detected. This is useful for SPI communication. It is recommended to set this bit to '1' in order to recover in the event of a system crash.

Bit 2: When set, the STRFNFCA will wake up when an RF field is detected.

Bit 1: When set, the STRFNFCA will wake up when a tag is detected in the RF field. This bit must also be set during Tag Detection calibration or during a Tag Detection sequence.

Bit 0: When set, the STRFNFCA will wake up and return to Ready state at the end of a predefined cycle. The Timeout (TO) value is defined by the MaxSleep and Wake-up period:

$$TO = (MaxSleep * (WuPeriod + 1)) * t_{REF}$$

$$t_{REF} = 256 * t_L = 8 \text{ ms } (f_{LFO} = 32 \text{ kHz}), \text{ mean power consumption in Sleep mode is } 25 \mu\text{A}$$

$$t_{REF} = 256 * t_L = 64 \text{ ms } (f_{LFO} = 4 \text{ kHz}), \text{ mean power consumption in Sleep mode is } 20 \mu\text{A}$$

Note: *Note that: $0x00 < MaxSleep < 0x1F$.*

This bit must be set when using the timer as a possible wake-up source. It must be set during Tag Detection Calibration to force a wake-up after the first Tag Detection trial.

Appendix B Example of tag detection calibration process

The following script works on the evaluation board and with the STRFNFCA development software available from the ST internet site.

This is a dichotomous approach to quickly converge to the DacDataRef value for which a wake-up event switches from tag detection to Timeout. In this process, only the DacDataH parameter is changed in successive Idle commands. And we look at the wake-up event reply to decide the next step.

```
00 01 02 corresponds to a Tag Detect,
00 01 01 corresponds to a Timeout.
```

```
REM, Tag Detection Calibration Test
```

```
REM, Sequence: Power-up Tag Detect Wake-up by Tag Detect (1 try
measurement greater or equal to DacDataH) or Timeout
```

```
REM, CMD 07 0E 03 A100 D801 1800 01 60 60 00 XX 3F 00
```

```
REM, 03 WU source = Tagdet or Timeout
```

```
REM, A100 Initial Dac Compare
```

```
REM, F801 Initial Dac Compare
```

```
REM, 1800 HFO
```

```
REM, 20 Wup Period 32 Inactivity period = 256ms (LFO @ 32kHz)
```

```
REM, 60 Osc 3ms (LFO @ 32kHz)
```

```
REM, 60 Dac 3ms (LFO @ 32kHz)
```

```
REM, 00 DacDataL = minimum level (floor)
```

```
REM, xx DacDataH 00 = minimum level (ceiling)
```

```
REM, 3F Swing 13.56 4.6 us
```

```
REM, 01 Maximum number of Sleep before Wakeup 2
```

```
REM, Tag Detection Calibration Test
```

```
REM, During tag detection calibration process DacDataL = 0x00
```

```
REM, We execute several tag detection commands with different
DacDataH values to determine DacDataRef level corresponding to
STRFNFCA application set-up
```

```
REM, DacDataReg value corresponds to DacDataH value for which Wake-
up event switches from Timeout (0x01) to Tag Detect (0x02)
```

```
REM, Wake-up event = Timeout when DacDataRef is between DacDataL
and DacDataH
```

```
REM, Search DacDataRef value corresponding to value of DacDataH for
which Wake-up event switches from Tag Detect (02) to Timeout(01)
```

```
REM, Step 0: force wake-up event to Tag Detect (set DacDataH = 0x00)
REM, With these conditions Wake-Up event must be Tag Detect
>>> 070E03A100F801180020606000003F01
<<< 000102
REM, Read Wake-up event = Tag Detect (0x02); if not, error .

REM, Step 1: force Wake-up event to Timeout (set DacDataH = 0xFC)
REM, With these conditions, Wake-Up event must be Timeout
>>> 070E03A100F801180020606000FC3F01
<<< 000101
REM, Read Wake-up event = Timeout (0x01); if not, error .

REM, Step 2: new DacDataH value = previous DacDataH +/- 0x80
REM, If previous Wake-up event was Timeout (0x01) we must decrease
DacDataH (-0x80)
>>> 070E03A100F8011800206060007C3F01
<<< 000101
REM, Read Wake-up event = Timeout (0x01) or Wake-up event = Tag
Detect (0x02)

REM, Step 3: new DacDataH value = previous DacDataH +/- 0x40
REM, If previous Wake-up event was Timeout (0x01), we must decrease
DacDataH (-0x40); else, we increase DacDataH (+ 0x40)
>>> 070E03A100F8011800206060003C3F01
<<< 000102
REM, Read Wake-up event = Timeout (0x01) or Wake-up event = Tag
Detect (0x02)

REM, Step 4: new DacDataH value = previous DacDataH +/- 0x20
REM, If previous Wake-up event was Timeout (0x01), we must decrease
DacDataH (-0x20); else, we increase DacDataH (+ 0x20)
>>> 070E03A100F8011800206060005C3F01
<<< 000102
REM, Read Wake-up event = Timeout (0x01) or Wake-up event = Tag
Detect (0x02)
```

```
REM, Step 5: new DacDataH value = previous DacDataH +/- 0x10
REM, If previous Wake-up event was Timeout (0x01), we must decrease
DacdataH (-0x10); else, we increase DacDataH (+ 0x10)
>>> 070E03A100F8011800206060006C3F01
<<< 000102

REM, Read Wake-up event = Timeout (0x01) or Wake-up event = Tag
Detect (0x02)

REM, Step 6: new DacDataH value = previous DacDataH +/- 0x08
REM, If previous Wake-up event was Timeout (0x01), we must decrease
DacDataH (-0x08); else, we increase DacDataH (+ 0x08)
>>> 070E03A100F801180020606000743F01
<<< 000101

REM, Read Wake-up event = Timeout (0x01) or Wake-up event = Tag
Detect (0x02)

REM, Step 7: new DacDataH value = previous DacDataH +/- 0x04
REM, If previous Wake-up event was Timeout (0x01), we must decrease
DacDataH (-0x04); else, we increase DacDataH (+ 0x04)
>>> 070E03A100F801180020606000703F01
<<< 000101

REM, Read Wake-up event = Timeout (0x01) or Wake-up event = Tag
Detect (0x02)

REM, If last Wake-up event = Tag Detect (0x02), search DacDataRef =
last DacDataH value
REM, If last Wake-up event = Timeout (0x01), search DacDataRef =
last DacDataH value -4

REM, For tag detection usage, we recommend setting DacDataL =
DacDataRef -8 and DacDataH = DacDataRef +8

>>> 070E0B21007801180020606064743F01
<<< 000101
```

Appendix C Example of tag detection command using results of tag detection calibration

The following script works on the evaluation board and with the STRFNFCA development software available from the ST internet site.

This is an example of a Tag Detection command when a tag is not present in the RF operating volume using the STRFNFCA:

```
>>> 070E0B21007801180020606064743F01
<<< 000101 Wake-up event = Timeout (0x01)
>>> 0803620100
<<< 000101
```

This is an example of a Tag Detection command when a tag is present in the RF operating volume using the STRFNFCA:

```
>>> 070E0B21007801180020606064743F01
<<< 000102 Wake-up event = Tag Detect (0x02)
>>> 0803620100
<<< 000102
```

Appendix D Examples of STRFNFC command code to activate NFC Forum and ISO/IEC 15693 tags

The following script works on the evaluation board and with the STRFNFC development software available from the ST internet site.

This section provides examples of STRFNFC command code used to activate NFC Forum and ISO/IEC 15693 tags using STRFNFC development software.

SENDRECV: Is the encapsulated STRFNFC SendReceive command for which command codes, number of bytes, and CRC are automatically appended to the parameter.

In this section,

- The STRFNFC command overhead (command code, length of data and transmission flag) is in black.
- The Tag instruction is in blue.
- The STRFNFC response overhead (result code, length of data and status) is in green.
- The Tag response is in red.

When the CRC append option is set in the Protocol Select command, the CRC is automatically appended by the STRFNFC, but the CRC is not visible in the instruction log file.

When the CRC is present in the command or response, CRC reply is in *italics*.

The following symbols correspond to:

>>> Frame sent by Host to STRFNFC

<<< Frame received by Host from STRFNFC

D.1 ISO/IEC 14443 Type A

D.1.1 NFC Forum Tag Type 1 (Topaz)

```
REM, STRFNFC code example to support NFC Forum Tag Type 1 14443_A
```

```
REM, TEST TOPAZ 14443A (UID 6E567A00)
```

```
REM, RFOFF
```

```
>>> 02020000
```

```
<<< 0000
```

```
REM, TEST TOPAZ 14443A (UID 6E567A00)
```

```
REM, Sel Prot 14443A option TOPAZ
```

```
>>> 020402000300
```

```
<<< 0000
```

```
REM, Optimization of synchronization between digital and analog  
inputs by adjusting TimerW value (default 0x52, min. 0x50, max.  
0x60). Recommended value is 0x56 or 0x58 for NFC Forum Tag Type 1  
(Topaz).
```



```
<<< 80 07 08 00 87C1 080000
REM, Read ad08 00 UID0 UID 1 UID2 UID3
>>> 04 08 01 0800 6E567A00 A8
<<< 80 07 08 00 87C1 080000
```

D.1.2 NFC Forum Tag Type 2

REM, STRFNFCA code example to support NFC Forum Tag Type 2 14443_A
REM, TEST INVENTORY then Read & Write in Memory

```
REM, Protocol select 14443A
>>> 02020200
<<< 0000

REM, Optimization of synchronization between digital and analog
inputs by adjusting TimerW value (default 0x52, min. 0x50, max.
0x60). Recommended value is 0x56 or 0x58 for NFC Forum Tag Type 2.
>>> 09043A005804
<<< 0000

REM, Recommended modulation and gain is 0xD1 or 0xD3 for NFC Forum
Tag Type 2.
>>> 0904680101D1
<<< 0000
```

```
----- ISO14443-A STARTING ANTICOLLISION ALGORITHM -----
ISO14443-A REQAreply ATQA
>>> SENDRECV, 26 07
<<< 80 05 4400 280000
ISO14443-A ANTICOL 1
>>> SENDRECV, 93 20 08
<<< 80 08 8804179F04 280000
ISO14443-A SELECT 1
>>> SENDRECV, 93 70 8804179F04 28
<<< 80 06 04 DA17 080000
ISO14443-A ANTICOL 2
>>> SENDRECV, 9520 08
<<< 80 08 7910000069 280000
ISO14443-A SELECT 2
```



```
>>> SENDRECV, 9570 7910000069 28
<<< 80 06 00 FE51 080000

--> UID = 04179F10000069
--> TAG selected
----- ISO14443-A END OF ANTICOLLISION ALGORITHM -----

REM, READ @A5
>>> SENDRECV, 300C 28
<<< 80 15 00000000FFFFFFFFFFFFFFFFFFFFFFFF F4CD 080000
REM, WRITE @0C data A5
>>> SENDRECV, A20CA5A5A5A5 28
<<< 8700 : Frame wait time out OR no tag
REM, READ @A5
>>> SENDRECV, 300C 28
<<< 80 15 A5A5A5A5FFFFFFFFFFFFFFFFFFFFFFFF 84D8 080000
```

D.1.3 NFC Forum Tag Type 4A

```
**** STRFNFC A code example to support NFC Forum Tag Type 4A (14443-
A) & NDEF message

REM, 14443B (STRFNFC A Protocol Selection 14443_A)

REM, first Byte 01 in DLL_STCMD is only requested by STRFNFC A
Development SW

***** STRFNFC A setting to support extended Frame Waiting Time
*****

>>> 020402000180
<<< 0000

REM, Optimization of synchronization between digital and analog
inputs by adjusting TimerW value (default 0x52, min. 0x50, max.
0x60). Recommended value is 0x56 or 0x58 for NFC Forum Tag Type 1
(Topaz).

>>> 09043A005804
<<< 0000

REM, Recommended modulation and gain is 0xD1 or 0xD3 for NFC Forum
Tag Type 1 (Topaz).

>>> 0904680101D1
<<< 0000
```

Examples of STRFNFCA command code to activate NFC Forum and ISO/IEC 15693 tags STRFNF-

REM, last Byte x7 or x8 in SENDRECV command number of bit in the
14443 _Type A frame

----- ISO14443-A STARTING ANTICOLLISION ALGORITHM -----

ISO14443-A REQA

>>> SENDRECV, 26 07

<<< 80 05 0400 280000

ISO14443-A ANTICOL 1

>>> SENDRECV, 9320 08

<<< 80 08 08192D A29E 280000

ISO14443-A SELECT 1

>>> SENDRECV, 937008192DA29E 28

<<< 80 06 20 FC70 080000

--> UID = 192DA29E , TAG selected

----- ISO14443-A END OF ANTICOLLISION ALGORITHM -----

*** ISO14443A_4 RATS/ATS (bit rate capability/FDT/CID usage)

>>> SENDRECV, E050 28

<<< 80 0A 057833B003 A0F8 080000

***** ISO14443A_4 PPS (Protocol parameter data rate)

>>> SENDRECV, D01100 28

<<< 80 06 D0 7387 080000

** ISO14443_4 APDU (command & reply are using Iblock format,
Prolog Information (APDU) Epilog)

*** 7816_ APDU format (Class Instruction, Param , Length cmd data
Length expected)

*** last byte 28 is a control byte to request STRFNFCA to
automatically happen CRC as Epilog

*** In response first 2 Byte 80 xx and last three bytes 08 0000 are
STRFNFCA's control bytes

*** Detect & Access NDEF Message

*** Select Application by name

>>> SENDRECV, 02 00 A4040007D2760000850100 28

<<< 80 08 02 9000 F109 080000

***** Select CC File by name

>>> SENDRECV, 03 00 A4000002E103 28

<<< 80 08 03 9000 2D53 080000

***** ReadBinary CC (offset Le)

>>> SENDRECV, 02 00 B000000F 28

<<< 80 17 02 000F1000FF00FF0406000100FF0000 9000 B755 080000

***** Select NDEF MSG by Identifier 0001

>>> SENDRECV, 03 00 A40000020001 28

<<< 80 08 03 9000 2D53 080000

***** ReadBinary NDEF MSG (MSG Length offset 00 2 bytes)

>>> SENDRECV, 02 00 B0000002 28

<<< 80 0A 02 0015 9000 ABB3 080000

***** Select NDEF File by name

>>> SENDRECV, 03 00 A40000020001 28

<<< 80 08 03 9000 2D53 080000

***** ReadBinary NDEF (MSG offset 02 , 20 Bytes)

>>> SENDRECV, 02 00 B0000215 28

<<< 80 1D 02D101115402656E4D32344C52313620747970652034 9000 25C5 080000

*** Header D1 type 01 Payload 11 type 54 status 02 english 656E
, MSG : M24LR16 type

D.2 ISO/IEC 14443 Type B

D.2.1 NFC Forum Tag Type 4B

**** STRFNFCA code example to support NFC Forum Tag Type 4B (14443-B) & NDEF message

REM, Check STRFNFCA setting & Protocol selection

Examples of STRFNFCA command code to activate NFC Forum and ISO/IEC 15693 tags STRFNF-

```
REM, FIELD OFF
>>> 02020000
<<< 0000
REM, 14443B (STRFNFCA PROTOCOL Selection 14443_B
>>> 020403010180
<<< 0000
REM, 14443B Optimization STRFNFCA Analog Configuration for 144443
(0x30)
>>> 090468010130
<<< 0000

REM, Access to NFC FORUM TAG Type 4B
REM, REQB 0x 050000 + CRC_B (APf AFI Param (slot0))
REM, Reply ATQB 0x50 4Bytes 4 Bytes 3 Bytes + CRC_B (PUPI AppliData
Protocol Info)
REM, Reply from STRFNFCA 80 0F 50AABBCCDD30ABAB010081E1AE00 00
REM, 80 response OK, 0F nb byte response including tag reply and the
ultimate STRFNFCA status byte 00 (reply OK)
REM, Tag reply 50AABBCCDD30ABAB010081E1AE00
REM, Response code 50
REM, Pupi AABBCCDD
REM, AFI 30 access control
REM, CRC_B(AID) ABAB
REM, Nb Appli (1) 01
REM, Prot Info byte1 00 (106 Kbps both direction)
REM, Prot Info byte 2 81( frame max 256 Bytes ISO compliant)
0081E1AE0000
REM, Prot Info byte 3 E1 (Max frame wait time 4.9 ms Appli
proprietary CID supported)
REM, CRC_B AE00

REM, 14443_3
REM, REQB ....
>>> 04 03 050000
<<< 80 0F 50AABBCCDD30ABAB010081E1 AE00 00
```

```
REM,  ATTRIB 0x1D PUPI 1byte 1byte 1byte 1 byte  + CRC_B (1D
Identifier Param1 Param2 Param3 Param4)

REM,  Param1  00      use default TR0 TR1 use EOF
REM,  Param2  07      max frame size 106 Kbps Up & Dwn link
REM,  Param3  01      ISO14443 compliant
REM,  Param4  08      CID (8)   card Identifier
REM,  reply STRFNFCA 80 04 18EBC3 00

REM,  80 response OK  04 nb byte response  including ultimate byte
00 STRFNFCA reply OK

REM,  Reply 10F9E0  coefBufferLength 1  CID 1  + CRC_B


REM,  ATTRIB ....CID0
>>> 04 09 1D AABCCDD00070100
<<< 80 04 10 F9E0 00


REM,  14443_4  ,  CID not used
REM,  APDU  for NDEF management
REM,  command format (INF)  CLA INS P1 P2 Lc(optional)
Data(optional)
REM,  Response (optional ):  body (optional) Sw1 sw2
REM,  Block Format Prolog INFO Epilog ( 02 [CID] [NAD]  [INF] CRC_B
)

REM,  Sequence lecture NDEF  ( for all  following commands CRC_B is
automatically appends by STRFNFCA)


REM,  Select application suivant la version du tag (100)
>>> SENDRECV,  02  00 A4 040007D2760000850100
<<< 80 06 029000296A 00
REM,  response 90 00 ok
REM,  response  6A 82 application not found
REM,  Select CC
>>> SENDRECV, 03 00 A4 0000 02 E103
<<< 80 06 03 9000 F530 00
REM,  Read CC
>>> SENDRECV, 02 00 B0 0000 0F
<<< 80 15 02 000F1000FF00FF0406000110020000 9000 E7FA 00
REM,  Select Ndef  0001
```

Examples of STRFNFCA command code to activate NFC Forum and ISO/IEC 15693 tags STRFNF-

```
>>> SENDRECV, 03 00 A4 0000 02 0001
<<< 80 06 03 9000 F530 00
REM, Read Msg Length
>>> SENDRECV, 02 00 B0 0000 02
<<< 80 08 02 0013 9000 53AA 00
REM, Select Ndef 0001
>>> SENDRECV, 03 00 A4 0000 02 0001
<<< 80 06 03 9000 F530 00
REM, Read Message
>>> SENDRECV, 02 00 B0 0002 13
<<< 80 19 02 D1010F5402656E557365204352393548462021 9000 8571 00
```

D.3 ISO/IEC 18092

D.3.1 NFC Forum Tag Type 3

```
REM, STRFNFCA code example to support NFC Forum Tag Type 3
REM, TEST INVENTORY ISO/IEC 18092
REM, RFOFF
>>> 02020000
<<< 0000
REM, Select Protocol 14443C
>>> 02020451
<<< 0000
REM, ISO/IEC 18092 New Modulation and Gain 0x50
>>> 090468010150
<<< 0000
REM, ISO/IEC 18092 Enable AutoDetect Filter to synchronize NFC Forum
Tag Type 3 with STRFNFCA device
>>> 09040A0102A1
<<< 0000
REM, REQC 00 FFFF 00 00 (command code System code No request slot
0)
REM, ATQC 80 12 01 010102148E0DB413 (Manuf ID) 100B4B428485D0FF
(Manuf Parameter)
>>> 04 05 00FFFF0000
<<< 80 12 01 010102148E0DB413 100B4B428485D0FF 00
```

D.4 ISO/IEC 15693

D.4.1 ISO/IEC 15693 tag

REM, Test Tag ISO/IEC 15693 (LR family)

REM, Protocol Selection Up link Ask 30% coding 1/4

REM, Down link Single Sub carrier High data rate

REM, Inventory One Slot

REM, Command Protocol Select 02 02 01 05

REM, Protocol Selection

>>> 02020105

<<< 0000

REM, Modification of IndexMod & Gain in Analog Value register
@69_index1 0x50

>>> 090468010150

<<< 0000

REM, Inventory 1 Slot

>>> 0403 260100

<<< 80 0D 0000B7100128B42102E0 66CC 00

REM, GetSystem Info

REM, Flags, UID E00221B4280110B7 DSFID 00 AFI 00 MemorySize 3F
BlockSize 03 IC Reference 21

>>> SENDRECV, 022B

<<< 80 12 00 0F B7100128B42102E0000003F03 21 DFB0 00

REM, Test Tag ISO/IEC 15693 (Dual family)

REM, Protocol Selection Up link Ask 30% coding 1/4

REM, Down link Single Sub carrier High data rate

REM, Inventory 1 Slot

REM, Command Protocol Select 02 02 01 05

REM, Protocol Selection

Examples of STRFNFCA command code to activate NFC Forum and ISO/IEC 15693 tags STRFNF-

```
>>> 02020105
```

```
<<< 0000
```

```
REM, Modification of IndexMod & Gain in Analog Value register  
@69_index1 0x50
```

```
>>> 090468010150
```

```
<<< 0000
```

```
REM, Inventory 1 Slot
```

```
>>> 0403 260100
```

```
<<< 80 0D 00FF07062092132C02E0 3D22 00
```

```
REM, GetSystem Info
```

```
REM, Flags ,UID E0022C1392200607 DSFID FF AFI 00 MemorySize 07FF  
BlockSize 03 IC Reference 2C
```

```
>>> SENDRECV, 0A2B
```

```
<<< 80 13 00 0F 07062092132C02E0 FF 00 FF07 03 2C 984D 00
```


Revision history

Table 50. Document revision history

Date	Revision	Changes
15-Sep-2010	1	Initial release.
21-Sep-2010	2	Updated footnote for pin ST_R1 in Table 2: STRFNFCA pin descriptions on page 6 .
13-May-2011	3	Clarified state and mode definitions in Section 3.1: Operating modes . Updated example values in Section 5.2: List of commands . Updated electrical values in Section 6: Electrical characteristics .
24-Oct-2011	4	Updated Figure 4: STRFNFCA initialization and operating state change on page 9 and Table 44: Field detection characteristics on page 53 .
28-Oct-2011	5	Updated Figure 5: Power-up sequence on page 9 . Added Section 6.2: DC characteristics on page 47 and updated Section 6.3: Power consumption characteristics on page 48 .
10-Nov-2011	6	Updated Table 28: Default code for available reader protocols on page 40 and Table 42: SPI interface characteristics on page 50 .
11-Apr-2012	7	Updated response to IDN command in Section 5.3 . Added optional parameter to increase maximum waiting time in NFC Forum Tag Type 3. Updated Section 6.3: Power consumption characteristics and added enhanced command for reducing consumption.
10-Jul-2012	8	Updated Figure 8: Sending command to STRFNFCA on page 12 , Figure 9: Polling the STRFNFCA until it is ready on page 12 , Figure 10: Reading data from STRFNFCA on page 13 and Figure 11: Reset the STRFNFCA on page 13 . Updated Section 5.9: Idle command (0x07) description , Section 5.11: Write Register (WrReg) command (0x09) description , Section 6.4: SPI characteristics , Section 6.5: RF characteristics and Appendix D: Examples of STRFNFCA command code to activate NFC Forum and ISO/IEC 15693 tags .
26-Jul-2012	9	Changed Response example to command example in Table 14: List of <Data> Send values for the SendRecv command for different protocols .
16-Nov-2012	10	Changed document classification from <i>Company Restricted Distribution</i> to <i>Public</i> .

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com