

VCXO Series (PECL)  
SU-A369X Series

### PATENT PENDING

### Description


The **SU-A369X Series** of voltage controlled quartz crystal oscillators provide frequency control by applying a voltage to Pin 1. This unit supplies DPECL compatible outputs which are enabled when Pin 2 is set to a logic low or left open.

### Features

- Frequency range—300.0MHz to 1.500GHz
- Wide Absolute Pull Range
- Will withstand SMD reflow temperatures of 183°C for 4 minutes maximum
- Space-saving alternative to discrete component oscillators
- High shock resistance, to 1000g
- 3.3 volt operation
- Low Jitter - Wavecrest jitter characterization available
- High Reliability - NEL HALT/HASS qualified for crystal oscillator start-up conditions
- High Q Crystal actively tuned oscillator circuit
- Power supply decoupling internal
- No internal PLL avoids cascading PLL problems
- High frequencies due to proprietary design
- Gold plated pads

### Electrical Connection

Pad	Connection
1	$V_{CO}$
2	Enable
3	$V_{EE}$
4	Output
5	Output Complement
6	$V_{CC}$

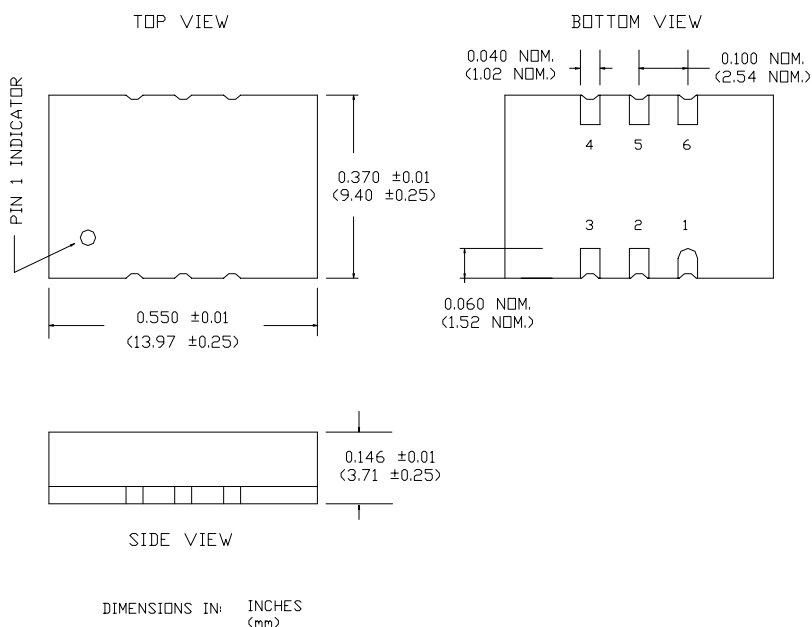

SU-A369X Series Continued  
VCXO (PECL)

Rev. F

## Operating Conditions and Output Characteristics

### Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Frequency	----	----	300.0MHz	----	1.500GHz
Duty Cycle	----	@ V <sub>O</sub> /2	45/55%	----	55/45%
Logic 0	V <sub>OL</sub>	----	V <sub>CC</sub> -1.810Vdc	----	V <sub>CC</sub> -1.620Vdc
Logic 1	V <sub>OH</sub>	----	V <sub>CC</sub> -1.200Vdc	----	V <sub>CC</sub> -0.880Vdc
Rise & Fall Time	tr,tf	20-80%V <sub>O</sub>	----	----	600 ps
Jitter, RMS <sup>(1)</sup>	----	----	----	3 psec	----
Absolute Pull Range <sup>(3)</sup>	APR	V <sub>CO</sub> =0.3 to 3.0V	----	±100ppm	----
Vco input impedance	----	50na dc current max	100K ohm	----	----
Vco linearity	----	V <sub>CO</sub> =0.3 to 3.0V	----	----	10%
Transfer Function <sup>(2)</sup>	----	V <sub>CO</sub> =0.3 to 3.0V	----	Positive	----
Modulation Bandwidth	MBW	@ -3dB, 0<V <sub>CO</sub> <3.3V	25kHz	----	----
Enable Voltage <sup>(4)</sup>	----	with V <sub>EE</sub> =0V	0V	----	0.8V
Disable Voltage	----	with V <sub>EE</sub> =0V	2.0V	----	V <sub>CC</sub>

### General Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Supply Voltage	V <sub>CC</sub> -V <sub>EE</sub>	3.3V±5%	3.135V	3.3V	3.465V
Supply Current	I <sub>CC</sub>	----	----	----	150 mA
Output current	I <sub>O</sub>	----	0.0 mA	----	±50.0 mA
Operating temperature	T <sub>A</sub>	----	0°C	----	70°C
Storage temperature	T <sub>S</sub>	----	-55°C	----	125°C
Power Dissipation	P <sub>D</sub>	----	----	----	520 mW
Lead temperature	T <sub>L</sub>	Soldering, 10 sec.	----	----	300°C
Load	50 Ohm to V <sub>CC</sub> -2V or Thevenin Equivalent, Bias Required				

### Environmental and Mechanical Characteristics

Mechanical Shock	Per MIL-STD-202, Method 213, Condition E
Thermal Shock	Per MIL-STD-833, Method 1011, Condition A
Vibration	0.060" double amplitude 10 Hz to 55 Hz, 35g's 55Hz to 2000 Hz
Soldering Condition	300°C for 10 seconds
Hermetic Seal	Leak rate less than 1 x 10 <sup>-8</sup> atm.cc/sec of helium

#### Footnotes:

- 1) Jitter performance is frequency dependent. Please contact factory for full Wavecrest characterization. RMS jitter bandwidth of 12kHz to 20MHz.
- 2) Frequency increase with increase in control voltage and is monotonic.
- 3) Pullability is frequency dependant. Consult factory.
- 4) Open to Enable pin also enables the outputs

