

Matched GaAs SPDT Switch, 5 - 2000 MHz


**SW-233-PIN/SW-236-PIN
V3**

Features

- Low Insertion Loss, 1.0 dB Typical
- Fast Switching Speed, 20 nS Typical
- Ultra Low DC Power Consumption, 0.12 mA Typical
- Integral TTL (SW-233) or CMOS (SW-236) Driver
- 50 Ohm Nominal Impedance
- MIL-STD-883 screening available

Description

Functional Block Diagram

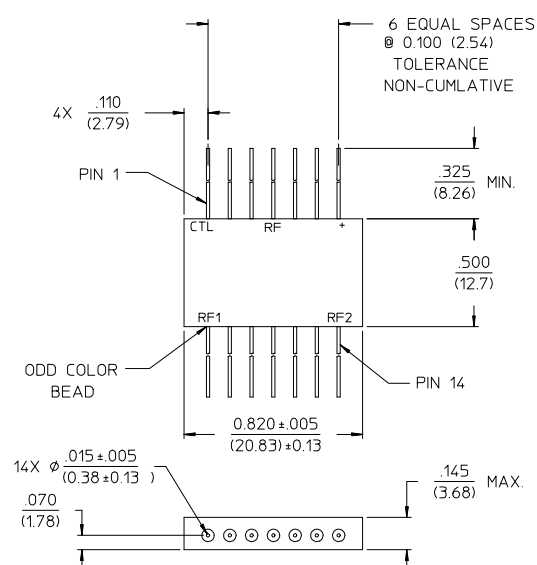

Dimensions in () are in mm
 Unless Otherwise Noted: .XXX = ± 0.010 (XX = ± 0.25)
 .XX = ± 0.02 (X = ± 0.5)
 WEIGHT (APPROX): 0.14 OUNCES 4 GRAMS

Ordering Information

Part Number	Package
SW-233-PIN	FP-16
SW-236-PIN	FP-16

Note: Reference Application Note M513 for reel size information.

Note: Die quantity varies.

Truth Table

Control Input				Condition of Switch			
"1" = Logic High TTL (SW-233) CMOS (SW-236)				RF Common to Each RF Port			
CTL 1	CTL 2	CTL 3	CTL 4	RF1	RF2	RF3	RF4
1	0	0	0	ON	OFF	OFF	OFF
0	1	0	0	OFF	ON	OFF	OFF
0	0	1	0	OFF	OFF	ON	OFF
0	0	0	1	OFF	OFF	OFF	ON

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

**Matched GaAs SPDT Switch,
5 - 2000 MHz**
**SW-233-PIN/SW-236-PIN
V3**
Electrical Specifications: $T_A = -55^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ ¹

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Insertion Loss	—	5 - 2000 MHz	dB	1.5	—	—
		5 - 1000 MHz	dB	1.2	—	—
		5 - 500 MHz	dB	1.1	—	—
VSWR	—	5 - 2000 MHz	Ratio	—	—	1.9:1
		5 - 1000 MHz	Ratio	—	—	1.5:1
		5 - 500 MHz	Ratio	—	—	1.4:1
Isolation	—	5 - 2000 MHz	dB	40	—	—
		5 - 1000 MHz	dB	45	—	—
		5 - 500 MHz	dB	53	—	—
IP ₂	For two tone input power up to +13 dBm	500 - 2000 MHz	dBm	—	+68	—
		50 MHz	dBm	—	+60	—
IP ₃	For two tone input power up to +13 dBm	500 - 2000 MHz	dBm	—	+46	—
		50 MHz	dBm	—	+40	—

1. All specifications apply when operated with bias voltages of +5 VDC (SW-205) or +8 VDC (SW-206) and 50 ohm impedance at all RF ports.

SW-233

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Trise, Tfall Ton, Toff Transients	50% CTL to 90/10% RF In-band	—	nS	—	7	—
		—	nS	—	20	—
		—	mV	—	100	—
1 dB Compression	Input Power	500 - 2000 MHz 50 MHz	dBm dBm	— —	+27 +21	— —
Bias Power	+5 VDC @ 0.12 mA Typ	—	mA	—	—	1

SW-236


Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Trise, Tfall Ton, Toff Transients	50% CTL to 90/10% RF In-band	—	nS	—	20	—
		—	nS	—	40	—
		—	mV	—	70	—
1 dB Compression	Input Power	500 - 2000 MHz 50 MHz	dBm dBm	— —	+33 +26	— —
Bias Power	+5 to +8 VDC @ 0.12 to 0.40 mA Typ	—	mA	—	—	1

Matched GaAs SPDT Switch, 5 - 2000 MHz


SW-233-PIN/SW-236-PIN
V3

Typical Performance Curves


Insertion Loss

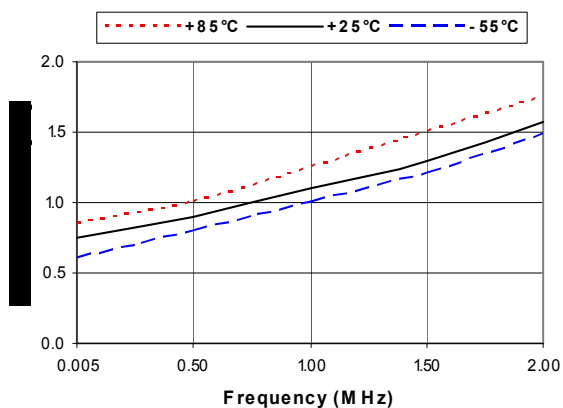

Isolation

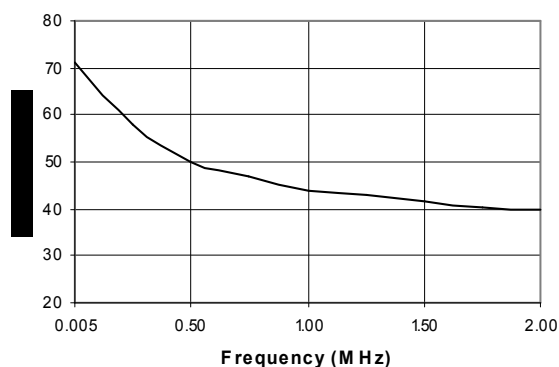

VSWR

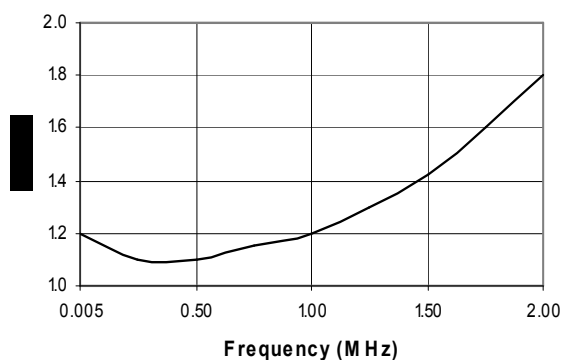

Schematic

