

MESSRS. : _____

AGENT : _____

**SPECIFICAION
OF
PYROELECTRIC PASSIVE
INFRARED SENSOR**

MODEL NO. : SW-IVC-15G

PART NO. : _____

 **NIPPON CERAMIC CO., LTD.**

176-17 Hirooka, Tottori-shi, 689-1193 JAPAN
TEL : +81-857-53-4666 FAX : +81-857-53-3532

MODEL NO. SW-IVC-15G	DRAWING NO.	REV : A	PAGE 1 / 3	
PART NO.				 NIPPON CERAMIC CO., LTD.

Electric Characteristics, ratings

	Min.	Typ.	Max.	Unit
Storage temperature	-30		85	degC
Operating temperature	-20		60	degC
Current consumption 1 *1	—	5	8	μA
Current consumption 2 *2	—	150	250	μA
Sensitivity *3 *4	TBD			
Noise *3 *4	TBD			
DC operation voltage	0.1	—	3.0	V
Operation delay time *2		0.15		Sec.
Operating voltage	3.1		3.5	V

*1 By SW-IVC-15G only.

*2 Including MPU. *Software of MPU is a tentative one for demonstration.

*3 As of engineering sample stage, compared to our RE200B or Excelitas LHi968, we have confirmed approx. 50 times higher output voltage as typical value.

*4 Sensor has no LPF / HPF. Sensor's output will be processed by MPU.
As for how to express Sensitivity and Noise values, we will decide later.


MODEL NO. SW-IVC-15G	DRAWING NO.	REV : A	PAGE 2 / 3	 NIPPON CERAMIC CO., LTD.
PART NO.				

Configuration (Figure 1)


Field of view
(Figure 1-a)




Top view
(Figure 1-b)

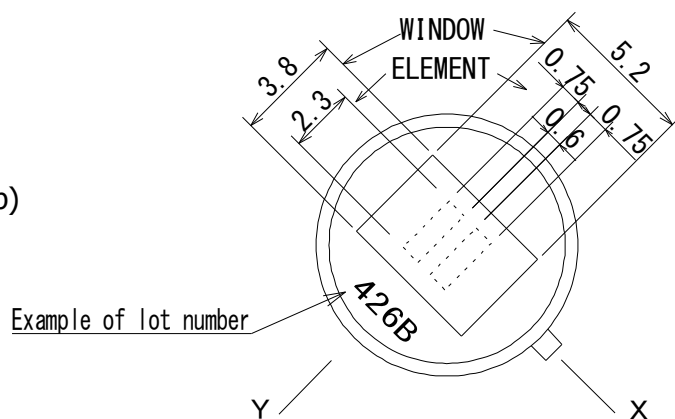

Side view
(Figure 1-c)

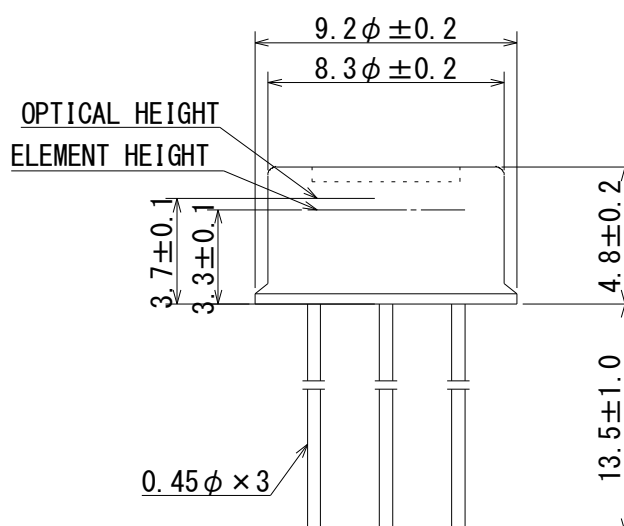

Base view
(Figure 1-d)

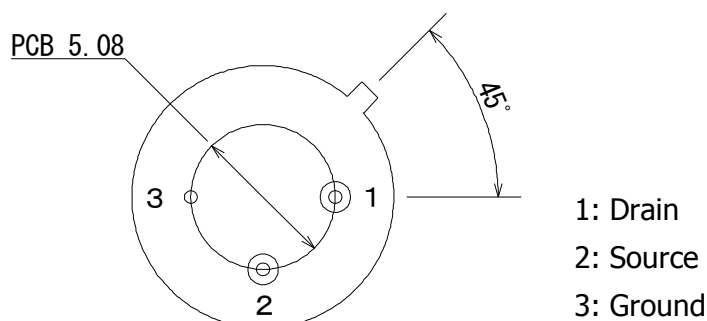

Unit [mm]

MODEL NO. SW-IVC-15G	DRAWING NO.	REV : A	PAGE 3 / 3	 NIPPON CERAMIC CO., LTD.
PART NO.				