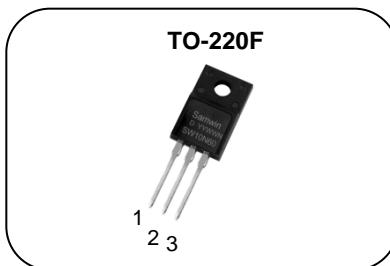



N-channel TO-220F MOSFET**Features**

- High ruggedness
- $R_{DS(ON)}$ (Max 1.1Ω) @ $V_{GS}=10V$
- Gate Charge (Typical 35nC)
- Improved dv/dt Capability
- 100% Avalanche Tested

**1. Gate 2. Drain 3. Source**

BV_{DSS} : 600V
 I_D : 10A
 $R_{DS(ON)}$: 1.1Ω

**General Description**

This power MOSFET is produced with advanced VDMOS technology of SAMWIN. This technology enable power MOSFET to have better characteristics, such as fast switching time, low on resistance, low gate charge and especially excellent avalanche characteristics. It is mainly suitable for half bridge or full bridge resonant topology like a electronic ballast, and also low power switching mode power appliances.

Order Codes

Item	Sales Type	Marking	Package	Packaging
1	SW F 10N60	SW10N60D	TO-220F	TUBE

Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{DSS}	Drain to Source Voltage	600	V
I_D	Continuous Drain Current (@ $T_C=25^\circ C$)	10	A
	Continuous Drain Current (@ $T_C=100^\circ C$)	6.3	A
I_{DM}	Drain current pulsed (note 1)	40	A
V_{GS}	Gate to Source Voltage	± 30	V
E_{AS}	Single pulsed Avalanche Energy (note 2)	427	mJ
E_{AR}	Repetitive Avalanche Energy (note 1)	43	mJ
dv/dt	Peak diode Recovery dv/dt (note 3)	5	V/ns
P_D	Total power dissipation (@ $T_C=25^\circ C$)	41.8	W
	Derating Factor above 25°C	0.33	W/°C
T_{STG}, T_J	Operating Junction Temperature & Storage Temperature	-55 ~ + 150	°C
T_L	Maximum Lead Temperature for soldering purpose, 1/8 from Case for 5 seconds.	300	°C

*. Drain current is limited by junction temperature.

Thermal characteristics

Symbol	Parameter	Value	Unit
R_{thjc}	Thermal resistance, Junction to case	2.99	°C/W
R_{thcs}	Thermal resistance, Case to Sink		°C/W
R_{thja}	Thermal resistance, Junction to ambient	47.21	°C/W

Electrical characteristic ($T_C = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
Off characteristics						
BV_{DSS}	Drain to source breakdown voltage	$V_{\text{GS}}=0\text{V}, I_D=250\mu\text{A}$	600			V
$\Delta \text{BV}_{\text{DSS}} / \Delta T_J$	Breakdown voltage temperature coefficient	$I_D=250\mu\text{A}$, referenced to 25°C		0.51		$^\circ\text{C}$
I_{DSS}	Drain to source leakage current	$V_{\text{DS}}=600\text{V}, V_{\text{GS}}=0\text{V}$			1	μA
		$V_{\text{DS}}=480\text{V}, T_C=125^\circ\text{C}$			50	μA
I_{GSS}	Gate to source leakage current, forward	$V_{\text{GS}}=30\text{V}, V_{\text{DS}}=0\text{V}$			100	nA
	Gate to source leakage current, reverse	$V_{\text{GS}}=-30\text{V}, V_{\text{DS}}=0\text{V}$			-100	nA
On characteristics						
$V_{\text{GS(TH)}}$	Gate threshold voltage	$V_{\text{DS}}=V_{\text{GS}}, I_D=250\mu\text{A}$	2.5		4.5	V
$R_{\text{DS(ON)}}$	Drain to source on state resistance	$V_{\text{GS}}=10\text{V}, I_D = 5\text{A}$		0.9	1.1	Ω
G_{fs}	Forward Transconductance	$V_{\text{DS}} = 30 \text{ V}, I_D = 5 \text{ A}$	7			S
Dynamic characteristics						
C_{iss}	Input capacitance	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=25\text{V}, f=1\text{MHz}$		1120		pF
C_{oss}	Output capacitance			122		
C_{rss}	Reverse transfer capacitance			22		
$t_{\text{d(on)}}$	Turn on delay time	$V_{\text{DS}}=300\text{V}, I_D=10\text{A}, R_G=25\Omega$ (note 4, 5)		16		ns
t_{r}	Rising time			38		
$t_{\text{d(off)}}$	Turn off delay time			75		
t_f	Fall time			41		
Q_g	Total gate charge	$V_{\text{DS}}=480\text{V}, V_{\text{GS}}=10\text{V}, I_D=10\text{A}$ (note 4, 5)		35		nC
Q_{gs}	Gate-source charge			6		
Q_{gd}	Gate-drain charge			17		

Source to drain diode ratings characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_s	Continuous source current	Integral reverse p-n Junction diode in the MOSFET			10	A
I_{SM}	Pulsed source current				40	A
V_{SD}	Diode forward voltage drop.	$I_s=10\text{A}, V_{\text{GS}}=0\text{V}$			1.5	V
T_{rr}	Reverse recovery time	$I_s=10\text{A}, V_{\text{GS}}=0\text{V},$ $dI_F/dt=100\text{A}/\mu\text{s}$		511		ns
Q_{rr}	Breakdown voltage charge			12		μC

※. Notes

- Repetitive rating : pulse width limited by junction temperature.
- $L = 8.5\text{mH}, I_{AS} = 10\text{A}, V_{DD} = 50\text{V}, R_G=25\Omega$, Starting $T_J = 25^\circ\text{C}$
- $I_{SD} \leq 10\text{A}, dI/dt = 100\text{A}/\mu\text{s}, V_{DD} \leq \text{BV}_{\text{DSS}}$, Starting $T_J = 25^\circ\text{C}$
- Pulse Test : Pulse Width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
- Essentially independent of operating temperature.

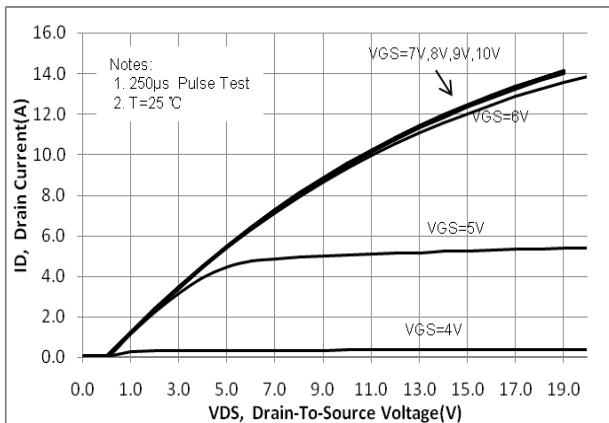
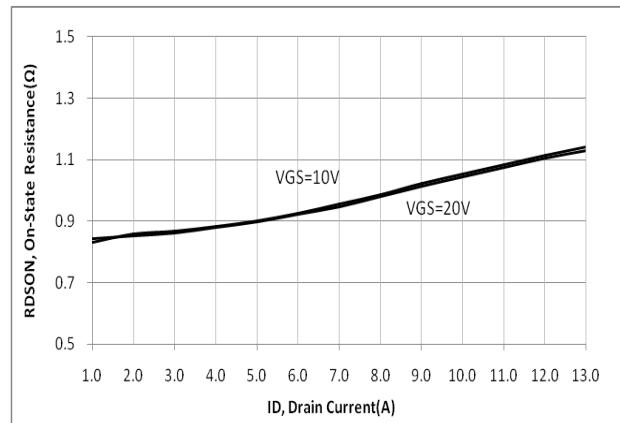
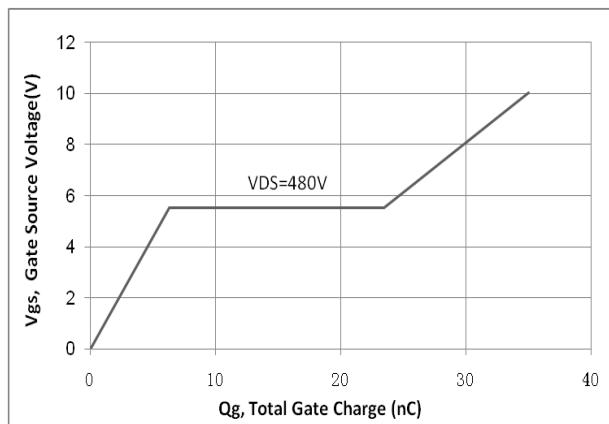
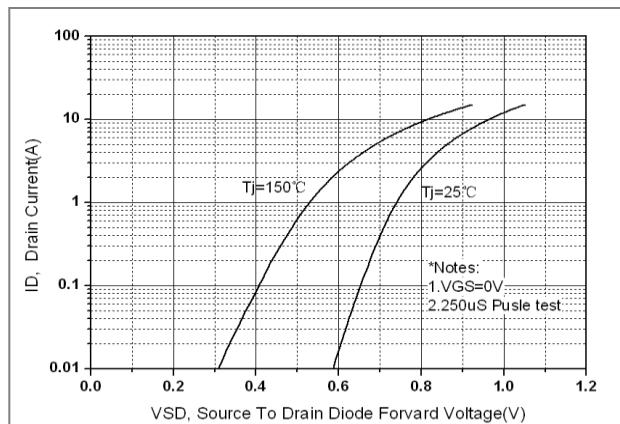
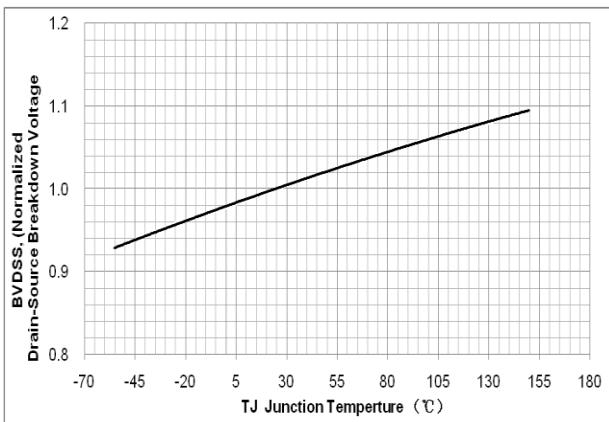
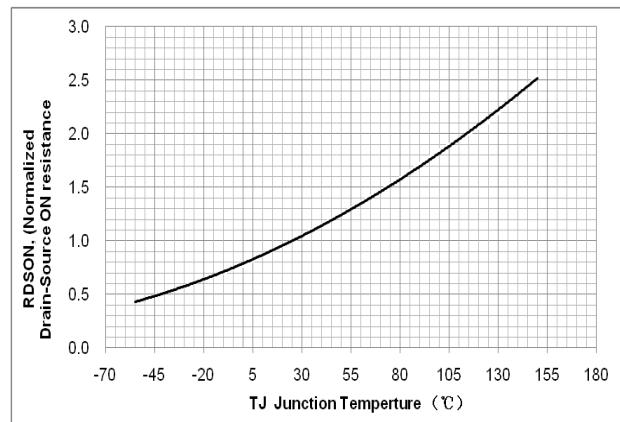
Fig. 1. On-state characteristics**Fig. 2. On-resistance variation vs. drain current and gate voltage****Fig. 3. Gate charge characteristics****Fig. 4. On state current vs. diode forward voltage****Fig 5. Breakdown Voltage Variation vs. Junction Temperature****Fig. 6. On resistance variation vs. junction temperature**

Fig. 7. Maximum safe operating area

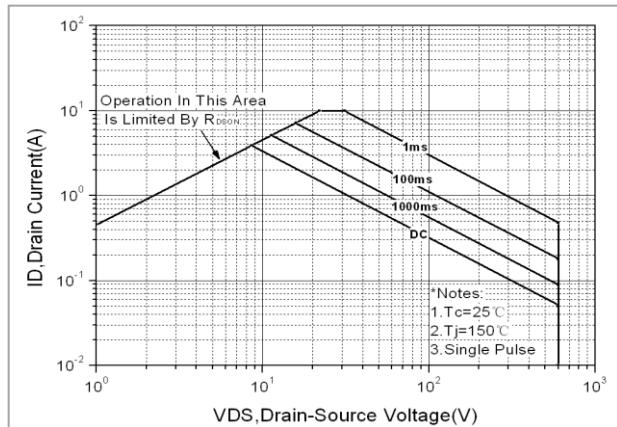


Fig. 8. Transient thermal response curve

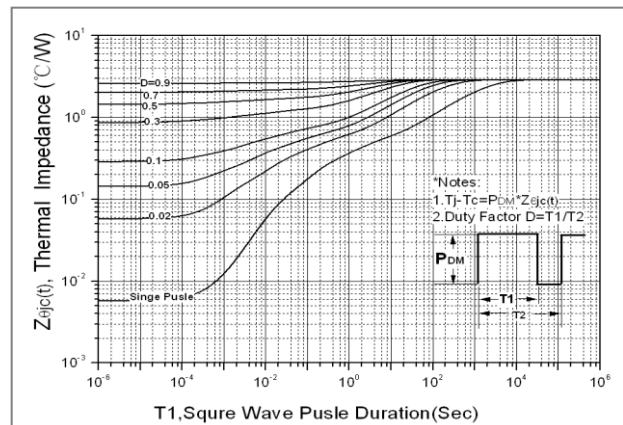


Fig. 9. Capacitance Characteristics

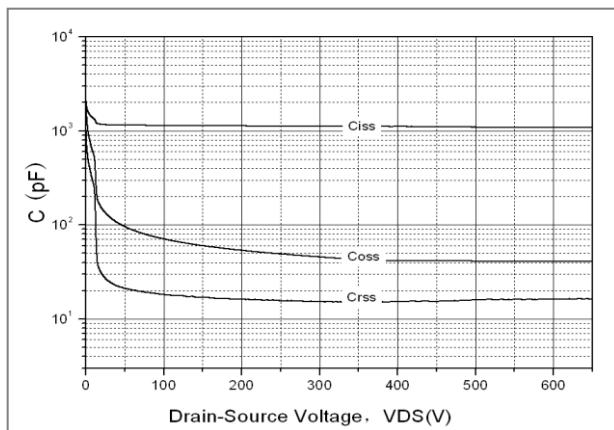


Fig. 10. Gate charge test circuit & waveform

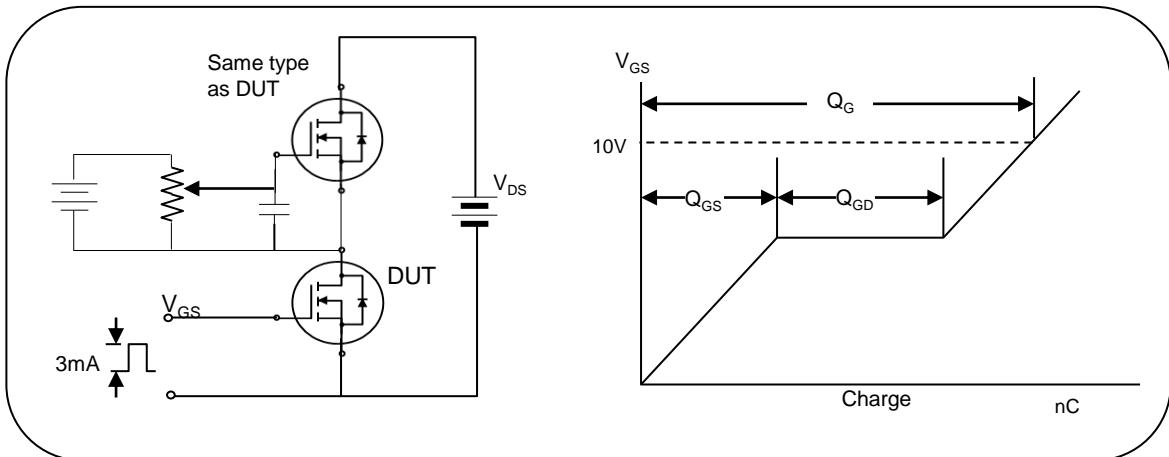


Fig. 11. Switching time test circuit & waveform

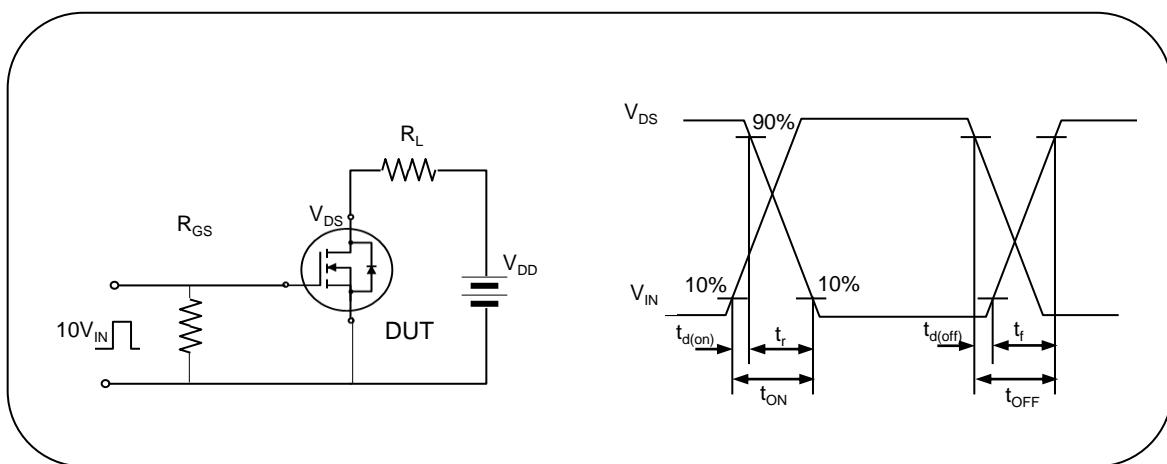


Fig. 12. Unclamped Inductive switching test circuit & waveform

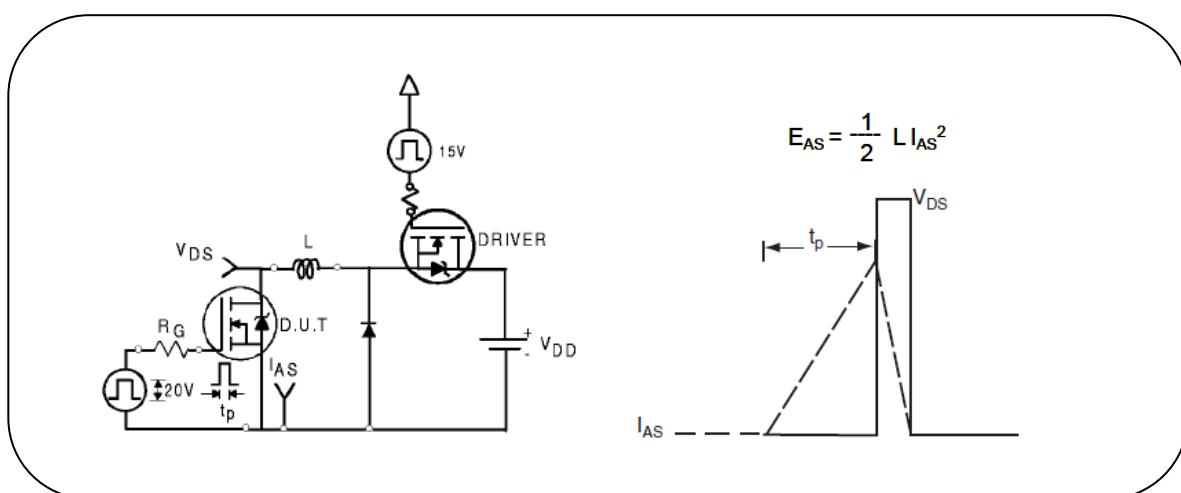


Fig. 13. Peak diode recovery dv/dt test circuit & waveform

