

Features


- 1.6mm(L)×0.8mm small size surface mount type
- Thin package of 0.4mm(H) thickness
- Transparent clear lens optic
- Low power consumption type chip LED
- **E ; ESD Protected (±2.0kv, 3 times @100pF, 1.5kΩ)**

Applications

- LCD backlighting
- Keypad backlighting
- Symbol backlighting
- Front panel indicator lamp

Outline Dimensions

unit : mm

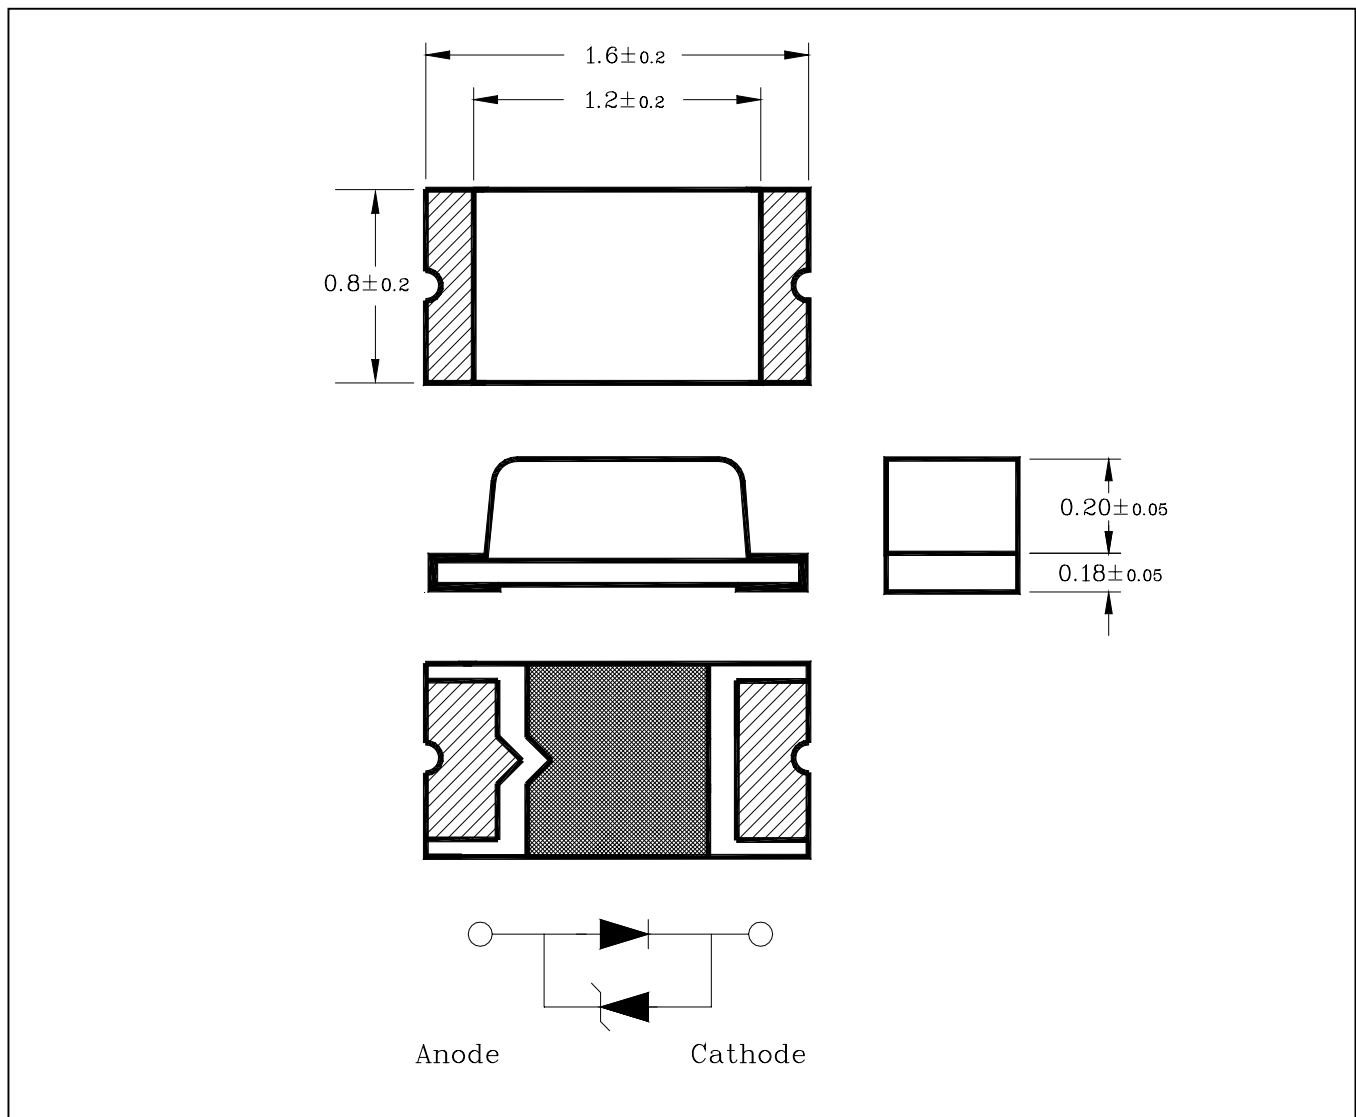


Absolute maximum ratings

Characteristic	Symbol	Ratings	Unit
Power Dissipation	P_D	80	mW
Forward Current	I_F	20	mA
*1Peak Forward Current	I_{FP}	50	mA
Reverse Voltage	V_R	4	V
Operating Temperature	T_{opr}	-25~80	°C
Storage Temperature	T_{stg}	-30~100	°C
*2Soldering Temperature	T_{sol}	240°C for 5 seconds	

*1.Duty ratio = 1/16, Pulse width = 0.1ms

*2. Recommended soldering Temperature Profile

- 2-1) Preheating 100°C to 150°C within 2 minutes Soldering 240°C within 5 seconds
- Gradual cooling (Avoid quenching)

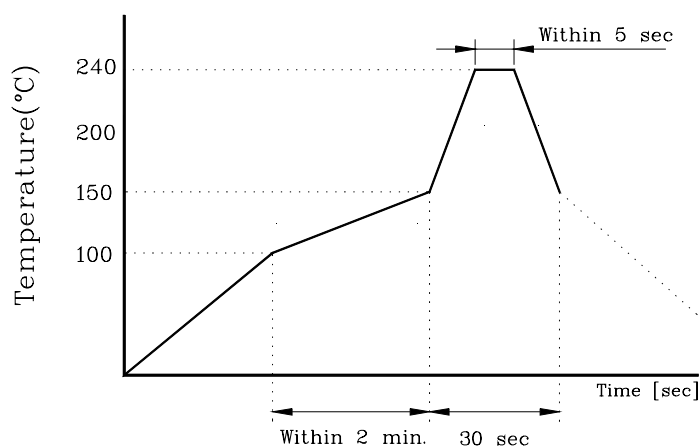

Electrical Characteristics

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F = 5\text{mA}$	-	3.1	3.4	V
*3Luminous Intensity	I_V	$I_F = 5\text{mA}$	15	40	65	mcd
*4Chromaticity Coordinates	X	$I_F = 5\text{mA}$	0.160	-	0.230	-
	Y		0.120	-	0.230	-
*5Half Angle	$\theta_{1/2}$	$I_F = 5\text{mA}$	-	±65	-	deg
			-	±70	-	

- *3. Forward Voltage Maximum tolerance for $\pm 0.1V$
- *4. Luminous Intensity Maximum tolerance for each Grade Classification limit is $\pm 18\%$
(The test result of $I_F=5mA$ is only for reference)
- *5. CIE Coordinates bin limits will have ± 0.02 tolerance
- *6. $\theta_{1/2}$ is the off-axis angle where the luminous intensity is 1/2 the peak intensity

- **Iv / VF Grade Classification**

Test Condition @ $I_F=5mA$	
Luminous Intensity	Forward Voltage
A : 13~22	0 : 2.6~2.8
B : 22~38	1 : 2.8~3.0
C : 38~65	2 : 3.0~3.2
	3 : 3.2~3.4

(Do not use to combine grade classification. It must be used separately grade classification)

Characteristic Diagrams

Fig. 1 $I_F - V_F$

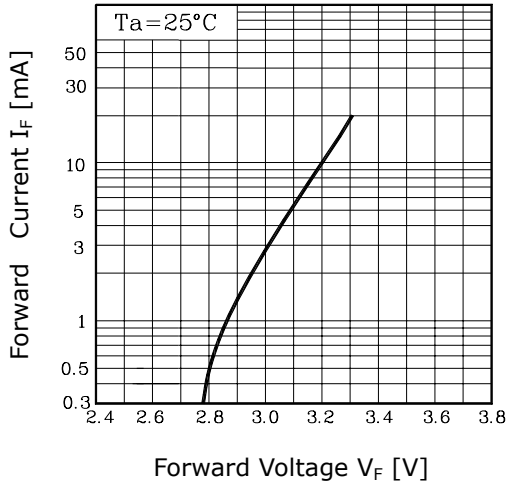


Fig. 2 $I_V - I_F$

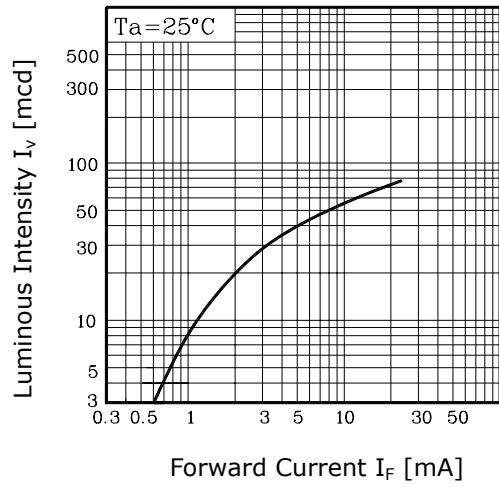


Fig. 3 $I_F - T_a$

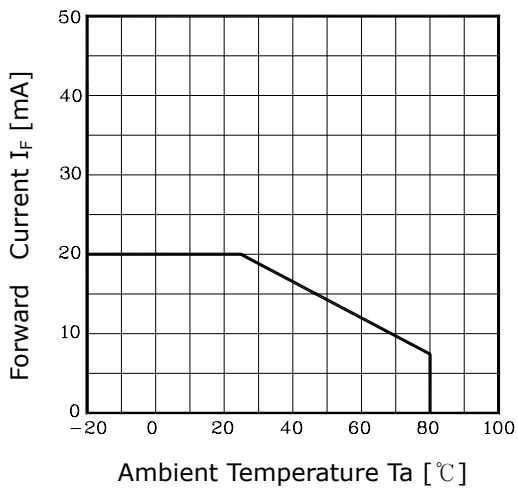


Fig. 4 Spectrum Distribution

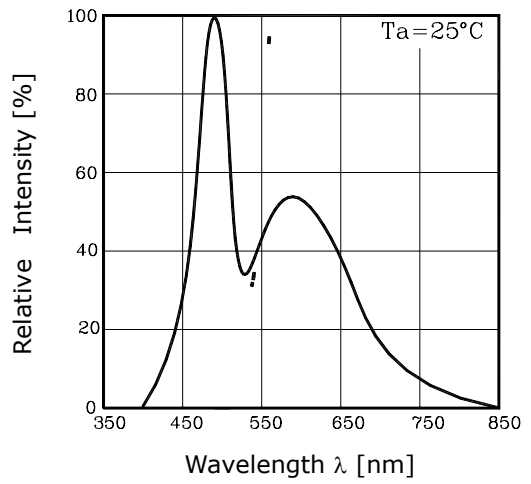


Fig. 5-1 Radiation Diagram(X)



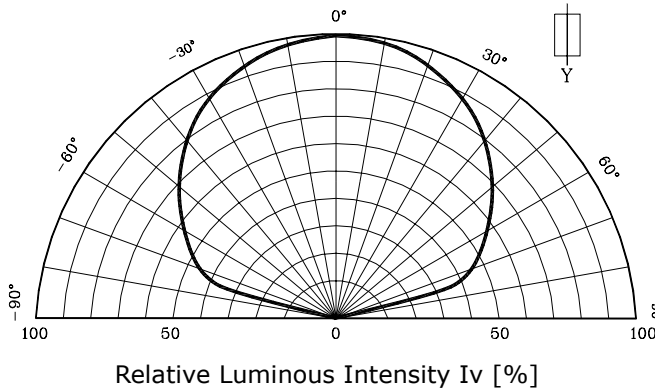


Fig. 5-2 Radiation Diagram(Y)

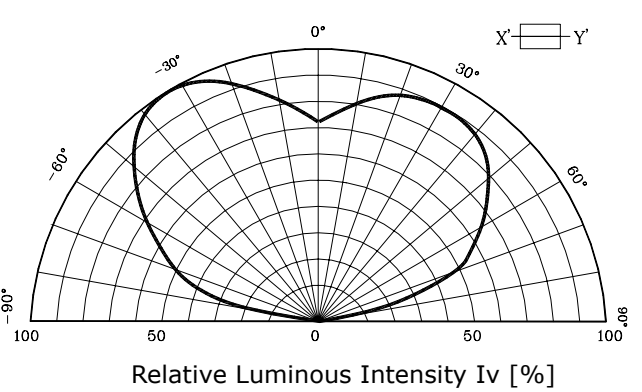

◆ CIE 1931 UCS Diagram

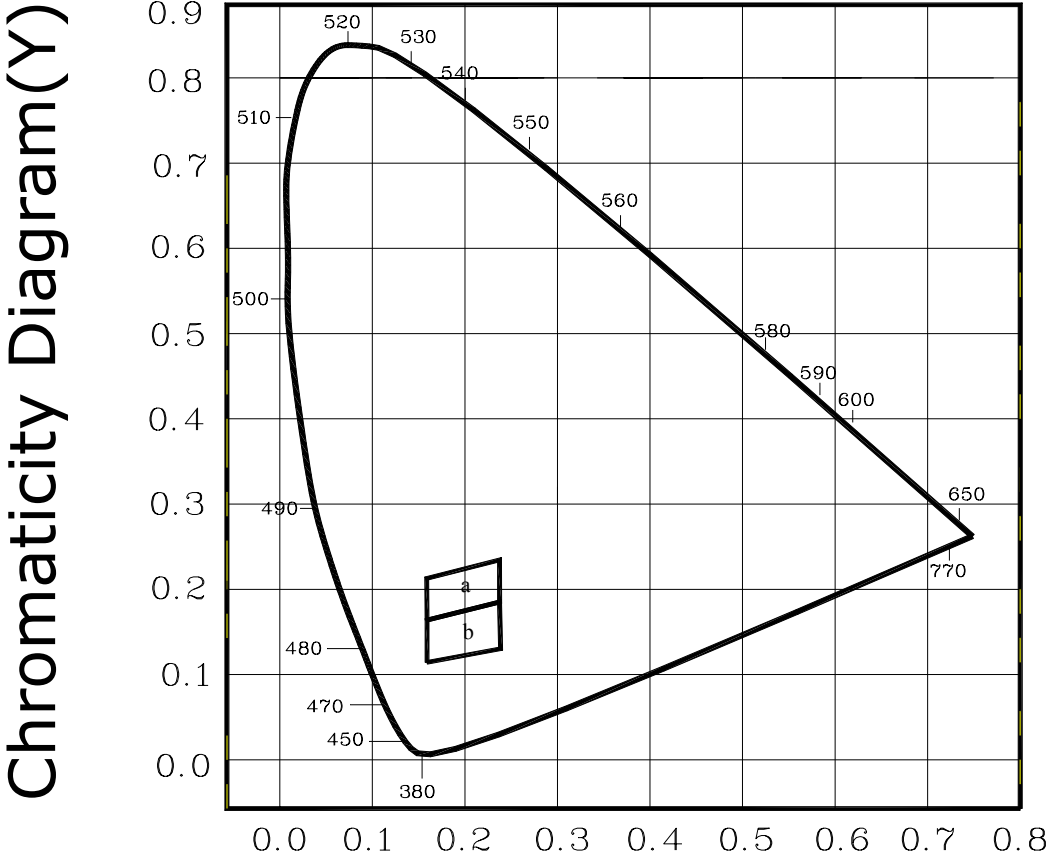

Chromaticity Diagram(Y)

● CIE Coordinates Grade Classification

Color Bin	CIE Coordinates		Color Bin	CIE Coordinates	
	X	Y		X	Y
a	0.160	0.210	b	0.160	0.165
	0.160	0.165		0.160	0.120
	0.230	0.185		0.230	0.140
	0.230	0.230		0.230	0.185

These AUK products are intended for usage in general electronic equipments(Office and communication equipment, measuring equipment, domestic electrification, etc.).

Please make sure that you consult with us before you use these AUK products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, traffic signal, combustion central, all types of safety device, etc.).

AUK cannot accept liability to any damage which may occur in case these AUK products were used in the mentioned equipments without prior consultation with AUK.