



# WESTCODE SEMICONDUCTORS



TECHNICAL PUBLICATION  
D P75  
ISSUE 1  
March, 1980

## Stud-Base Silicon Rectifier Diodes Type PCN/PCR075 75amperes average: up to 1600 volts $V_{RRM}$

**RATINGS** Maximum values at 175°C  $T_j$  unless stated otherwise

RATING	CONDITIONS	SYMBOL	
Average forward current	Half sine wave 135°C case temperature	$I_{F(AV)}$	75A
RMS current		$I_{F(RMS)}$	118A
DC forward current		$I_F$	118A
Peak one-cycle surge (non repetitive)	8.3ms duration $\left\{ \begin{array}{l} 60\% V_{RRM} \text{ re-applied} \\ V_R \leqslant 10 \text{ volts} \end{array} \right.$	$I_{FSM(1)}$	1378A
Maximum permissible surge energy	8.3ms duration $\left\{ \begin{array}{l} 60\% V_{RRM} \text{ re-applied} \\ V_R \leqslant 10 \text{ volts} \end{array} \right.$	$I_{FSM(2)}$	1584A
	3ms duration $V_R \leqslant 10 \text{ volts}$	$I^2t(1)$	$8196A^2s$
Case operating temperature		$I^2t(2)$	$10839A^2s$
Storage temperature		$T_c$	$8284A^2s$
		$T_{stg}$	-55, +175°C
			-55, +175°C

**CHARACTERISTICS** Maximum values at 175°C  $T_j$  unless stated otherwise

CHARACTERISTIC	CONDITIONS	SYMBOL	
Peak forward voltage drop	At 388A, $I_{FM}$	$V_{FM}$	1.51V
Forward conduction threshold voltage		$V_0$	0.925V
Forward conduction slope resistance		$r$	$1.5m\Omega$
Peak reverse current	At $V_{RRM}$	$I_{RRM}$	10mA
Thermal resistance junction to case for a diode with a maximum forward voltage drop characteristic	DC and 180° sine wave 120° rectangular wave	$R_{th(j-c)}$	$0.44^\circ C/W$ $0.58^\circ C/W$
Thermal resistance case to heatsink		$R_{th(c-hs)}$	$0.1^\circ C/W$


VOLTAGE CODE →	02	04	06	08	10	12	14	15	16
Repetitive voltage $V_{RRM}$	200	400	600	800	1000	1200	1400	1500	1600
Non-repetitive voltage $V_{RSM}$	300	500	700	900	1100	1300	1500	1600	1700

**ORDERING INFORMATION** (Please quote device code as explained below – 10 digits)


S	www.DataSheet4U.com	P    C	●	0    7    5
FIXED BASIC CODE	VOLTAGE CODE (see above)	FIXED OUTLINE CODE D05	STUD POLARITY N = cathode R = anode	FIXED TYPE CODE

Typical code SW06PCR075 = 600V<sub>RRM</sub> diode with stud anode


In the interest of product improvement, Westcode reserves the right to change specifications at any time without notice.

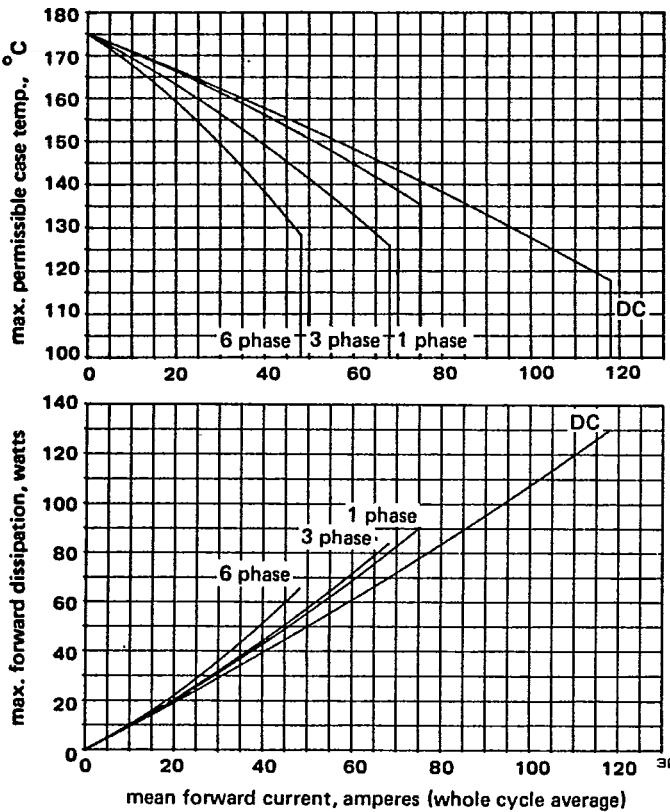


**Figure 1** . Dissipation and stud temperature v. mean forward current

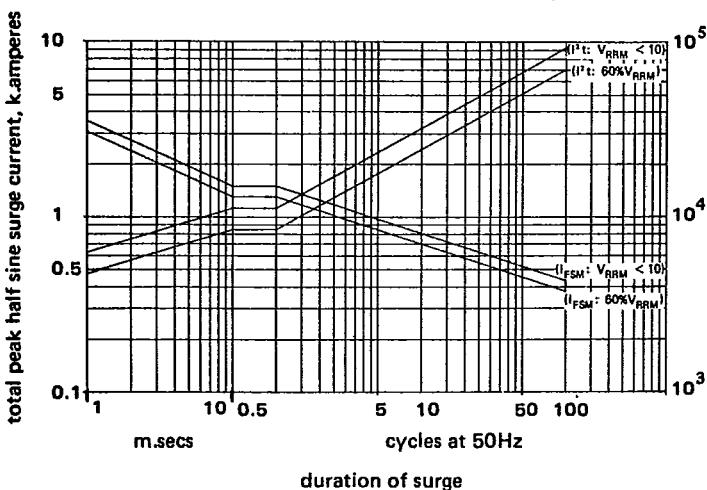


**Figure 2** Max. non repetitive surge current at initial junction temperature 175°C

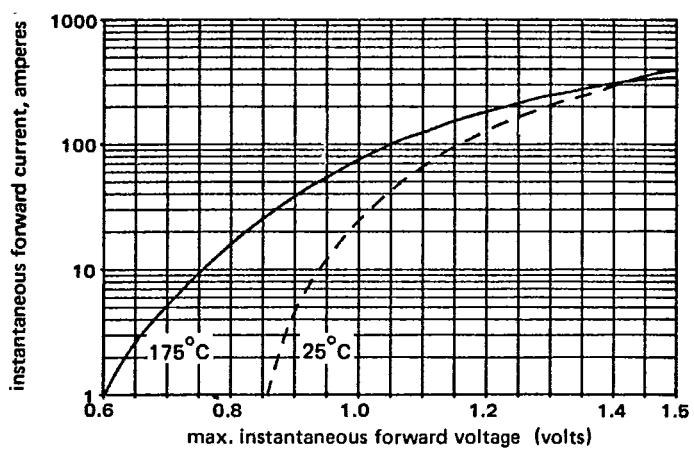

**Figure 3** Forward voltage characteristic

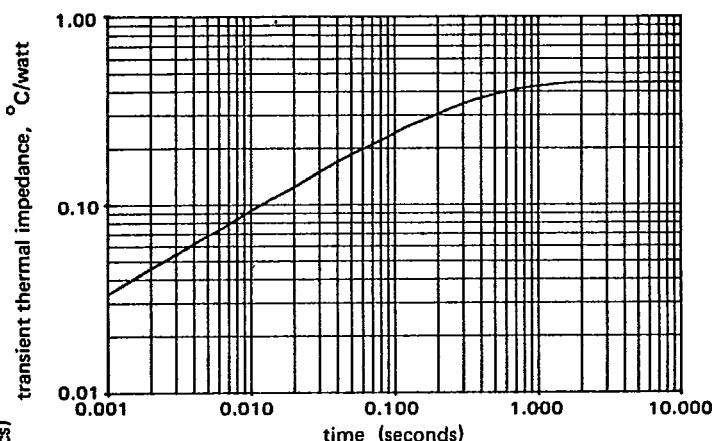

**Figure 4** Transient thermal impedance, junction to case

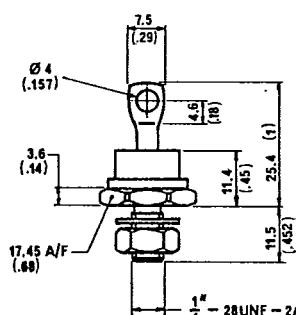

Conforms to DO — 5