
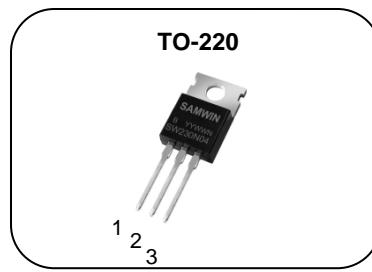


N-channel TO-220 MOSFET**Features**

- High ruggedness
- $R_{DS(ON)}$ (Max 4.0mΩ) @ $V_{GS}=10V$
- Gate Charge (Typical 190nC)
- Improved dv/dt Capability
- 100% Avalanche Tested

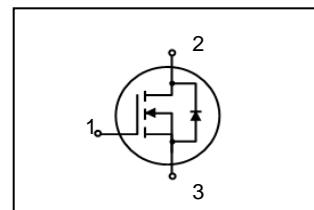

BV_{DSS} : 40V
I_D : 230A
R_{DS(ON)} : 4.0mΩ

**General Description**

This power MOSFET is produced with advanced VDMOS technology of SAMWIN. This technology enable power MOSFET to have better characteristics, such as fast switching time, low on resistance, low gate charge and especially excellent avalanche characteristics. This power MOSFET is usually used at high efficient DC to DC converter block and switch mode power supply.

Order Codes

Item	Sales Type	Marking	Package	Packaging
1	SW P 230N04	SW230N04B	TO-220	TUBE

Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{DSS}	Drain to Source Voltage	40	V
I_D	Continuous Drain Current (@ $T_C=25^\circ C$)	230*	A
	Continuous Drain Current (@ $T_C=100^\circ C$)	144.9*	A
I_{DM}	Drain current pulsed (note 1)	920	A
V_{GS}	Gate to Source Voltage	± 25	V
E_{AS}	Single pulsed Avalanche Energy (note 2)	900	mJ
E_{AR}	Repetitive Avalanche Energy (note 1)	302	mJ
dv/dt	Peak diode Recovery dv/dt (note 3)	5	V/ns
P_D	Total power dissipation (@ $T_C=25^\circ C$)	288.7	W
	Derating Factor above 25°C	2.3	W/°C
T_{STG}, T_J	Operating Junction Temperature & Storage Temperature	-55 ~ + 150	°C
T_L	Maximum Lead Temperature for soldering purpose, 1/8 from Case for 5 seconds.	300	°C

*. Drain current is limited by junction temperature.

Thermal characteristics

Symbol	Parameter	Value	Unit
R_{thjc}	Thermal resistance, Junction to case	0.43	°C/W
R_{thcs}	Thermal resistance, Case to Sink		°C/W
R_{thja}	Thermal resistance, Junction to ambient	51.2	°C/W

Electrical characteristic ($T_C = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
Off characteristics						
BV_{DSS}	Drain to source breakdown voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	40			V
$\Delta \text{BV}_{\text{DSS}} / \Delta T_J$	Breakdown voltage temperature coefficient	$I_{\text{D}}=250\mu\text{A}$, referenced to 25°C		0.04		$^\circ\text{C}$
I_{DSS}	Drain to source leakage current	$V_{\text{DS}}=40\text{V}, V_{\text{GS}}=0\text{V}$			1	μA
		$V_{\text{DS}}=32\text{V}, T_C=125^\circ\text{C}$			50	μA
I_{GSS}	Gate to source leakage current, forward	$V_{\text{GS}}=25\text{V}, V_{\text{DS}}=0\text{V}$			100	nA
	Gate to source leakage current, reverse	$V_{\text{GS}}=-25\text{V}, V_{\text{DS}}=0\text{V}$			-100	nA
On characteristics						
$V_{\text{GS(TH)}}$	Gate threshold voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	2		4	V
$R_{\text{DS(ON)}}$	Drain to source on state resistance	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=100\text{A}$		2.3	4.0	$\text{m}\Omega$
G_{fs}	Forward Transconductance	$V_{\text{DS}} = 8\text{V}, I_{\text{D}} = 30\text{A}$		100		S
Dynamic characteristics						
C_{iss}	Input capacitance	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=25\text{V}, f=1\text{MHz}$		7830		pF
C_{oss}	Output capacitance			1790		
C_{rss}	Reverse transfer capacitance			1360		
$t_{\text{d(on)}}$	Turn on delay time	$V_{\text{DS}}=20\text{V}, I_{\text{D}}=25\text{A}, R_{\text{G}}=25\Omega$ (note 4, 5)		72		ns
t_{r}	Rising time			225		
$t_{\text{d(off)}}$	Turn off delay time			321		
t_{f}	Fall time			302		
Q_{g}	Total gate charge	$V_{\text{DS}}=35\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=25\text{A}$ (note 4, 5)		190		nC
Q_{gs}	Gate-source charge			20		
Q_{gd}	Gate-drain charge			96		

Source to drain diode ratings characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_S	Continuous source current	Integral reverse p-n Junction diode in the MOSFET			230	A
I_{SM}	Pulsed source current				920	A
V_{SD}	Diode forward voltage drop.	$I_S=100\text{A}, V_{\text{GS}}=0\text{V}$			1.2	V
T_{rr}	Reverse recovery time	$I_S=25\text{A}, V_{\text{GS}}=0\text{V},$ $dI_F/dt=100\text{A}/\mu\text{s}$		48		ns
Q_{rr}	Reverse recovery Charge			46		nC

※. Notes

1. Repetitive rating : pulse width limited by junction temperature.
2. $L = 2.0\text{mH}, I_{\text{AS}} = 30\text{A}, V_{\text{DD}} = 30\text{V}, R_{\text{G}}=25\Omega$, Starting $T_J = 25^\circ\text{C}$
3. $I_{\text{SD}} \leq 25\text{A}, dI/dt = 100\text{A}/\mu\text{s}, V_{\text{DD}} \leq \text{BV}_{\text{DSS}}$, Starting $T_J = 25^\circ\text{C}$
4. Pulse Test : Pulse Width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
5. Essentially independent of operating temperature.

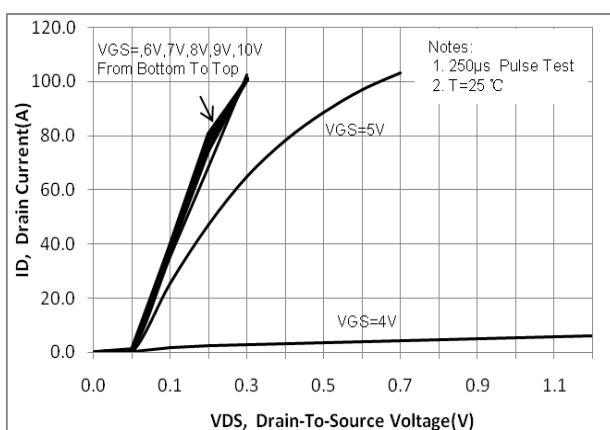
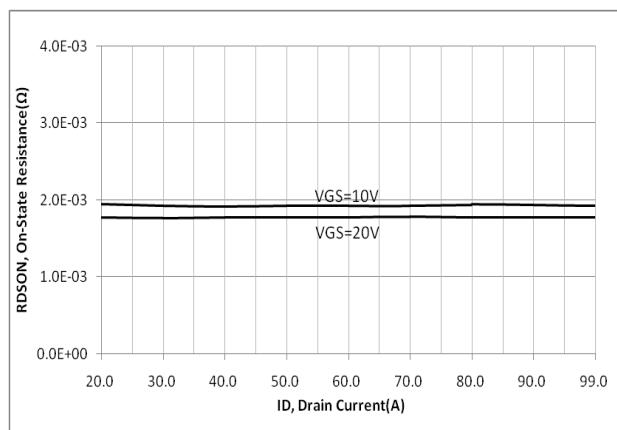
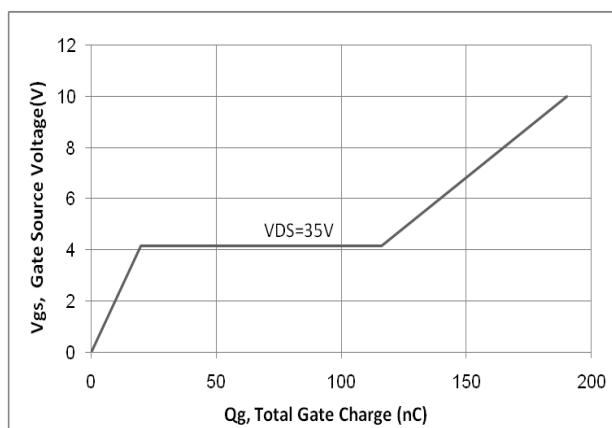
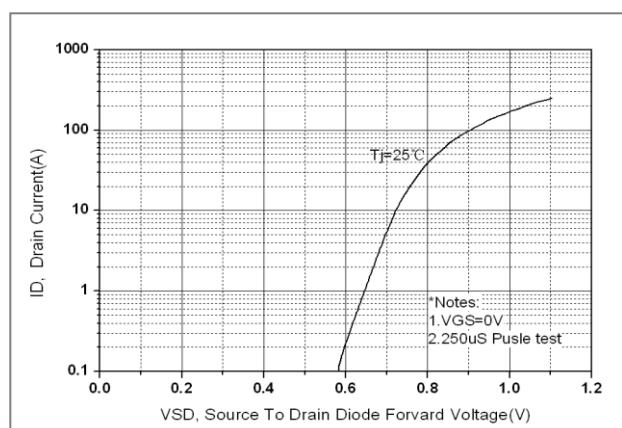
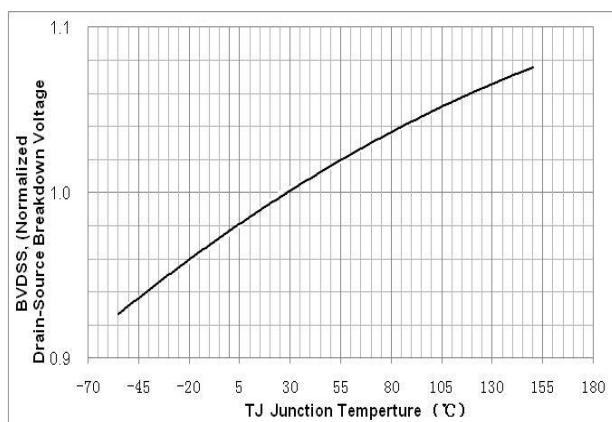
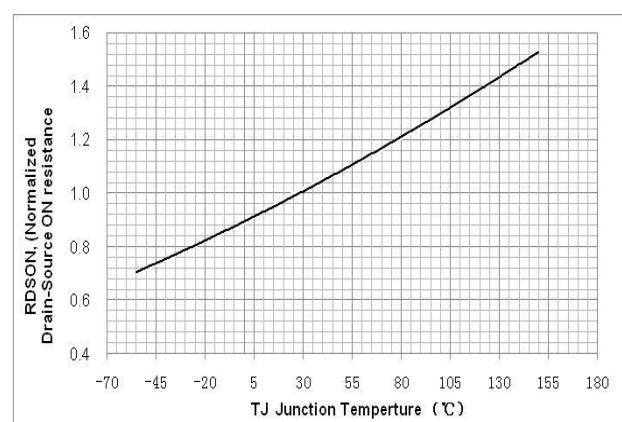
Fig. 1. On-state characteristics**Fig. 2. On-resistance variation vs. drain current and gate voltage****Fig. 3. Gate charge characteristics****Fig. 4. On state current vs. diode forward voltage****Fig 5. Breakdown Voltage Variation vs. Junction Temperature****Fig. 6. On resistance variation vs. junction temperature**

Fig. 7. Maximum safe operating area

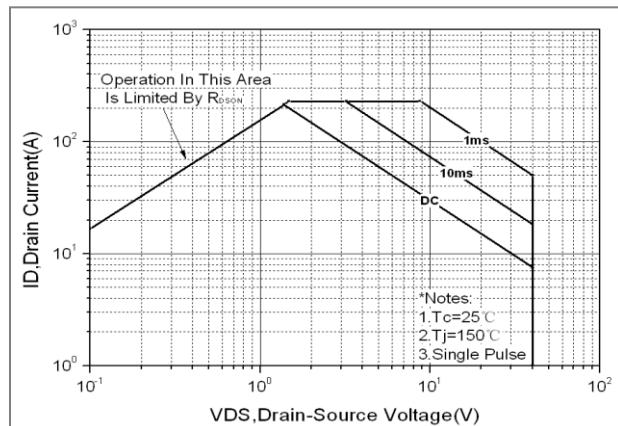


Fig. 8. Transient thermal response curve

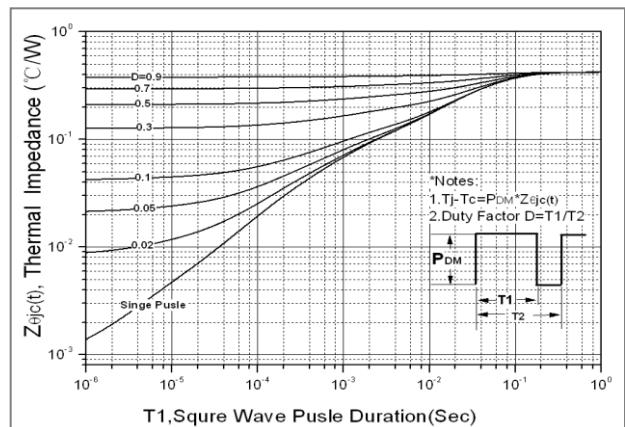


Fig. 9. Capacitance Characteristics

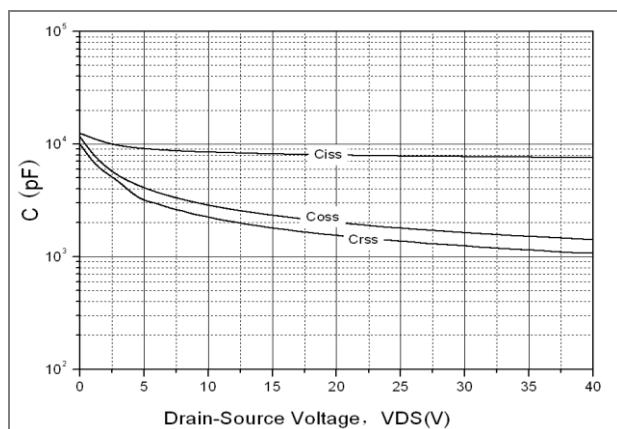


Fig. 10. Gate charge test circuit & waveform

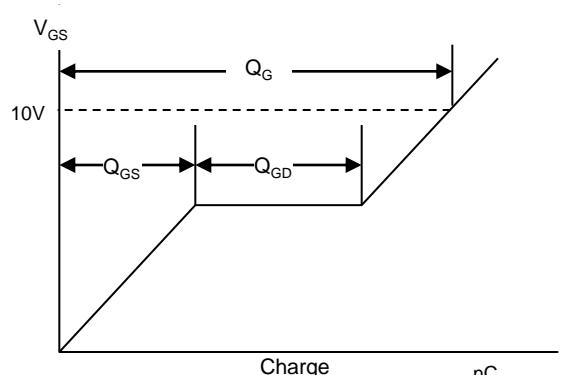
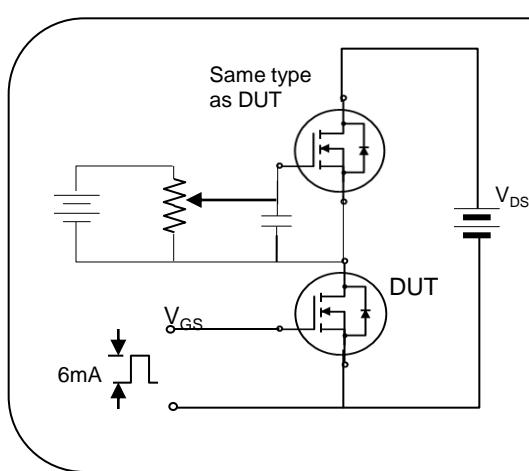


Fig. 11. Switching time test circuit & waveform

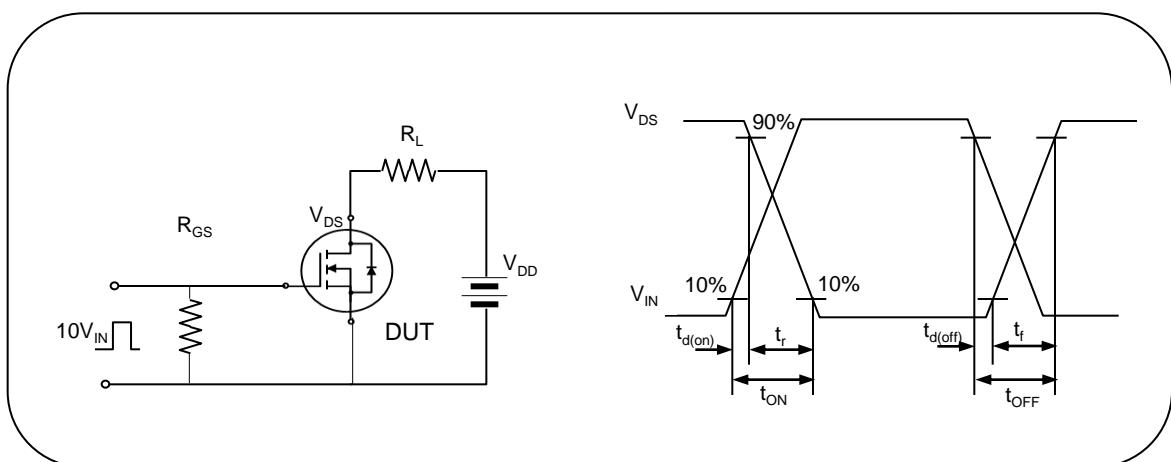


Fig. 12. Unclamped Inductive switching test circuit & waveform

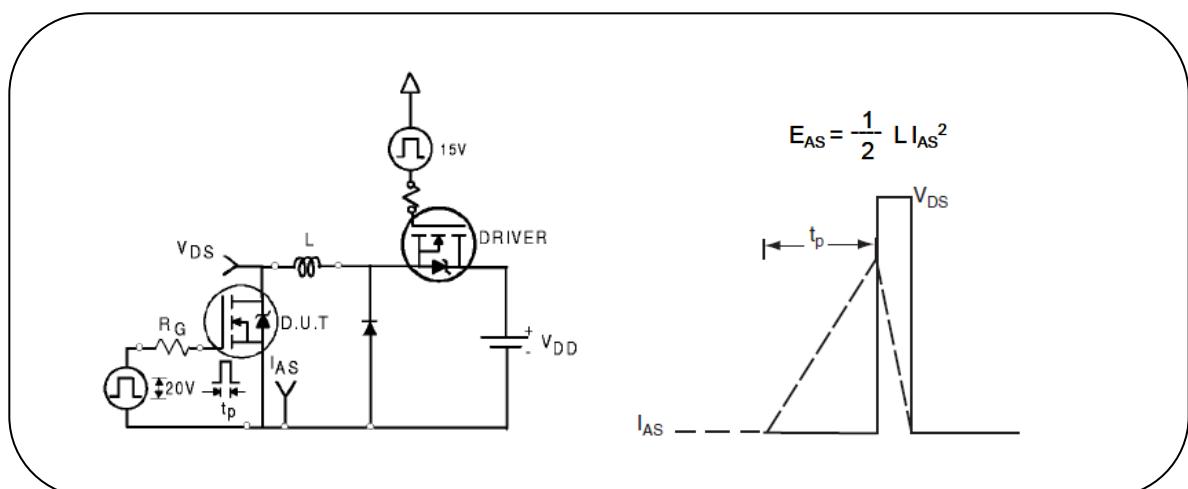


Fig. 13. Peak diode recovery dv/dt test circuit & waveform

