

Surface Mount

Frequency Mixer

SYM-30DLHW


Level 10 (LO Power +10dBm) 5 to 3000 MHz

Features

- wideband, 5 to 3000 MHz
- excellent L-I isolation, 45 dB typ.
- low conversion loss, 6.5 dB typ.

Applications

- CDMA
- GSM
- DCS
- PCN



CASE STYLE: TTT167
PRICE: \$8.95 ea. QTY (10-49)

Mixer Electrical Specifications

MODEL NO.	FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3@ center band Typ. (dBm)	E FACTOR				
			Mid-Band			Total Range Max.	L			M			U			L					M			U
	$\bar{x}$	σ	Max.	Typ. Min.	Typ. Min.		Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.			Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.
SYM-30DLHW	5-3000	5-1500	6.5	.15	8.4	9.2	36	28	27	29	33	23	41	32	45	37	47	31	19	0.9				

1 dB COMP.: +5 dBm typ.
E = (IP3(dBm) - LO Power(dBm))/10

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
m = mid band [$2f_L$ to $f_U/2$]


Pin Connections

PORT	X
LO	2
RF	1
IF	3
GROUND EXT.	4,5,6


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

electrical schematic




Outline Drawing

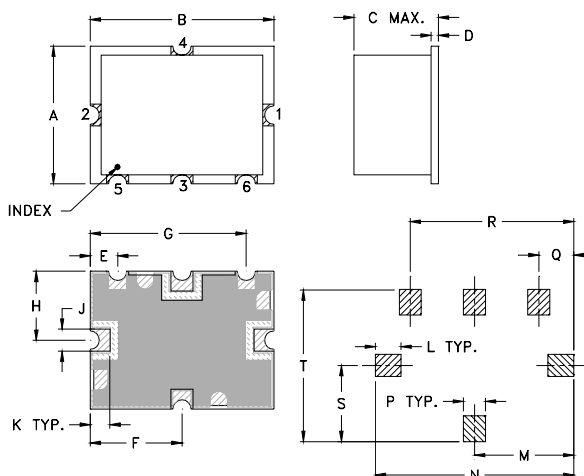

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.375	.500	.23	.020	.075	.250	.425	.187	.050	.050	.070	.270	.540	.060	.095	.445	.208	.415	grams
9.53	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.27	1.27	1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	.8

Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)

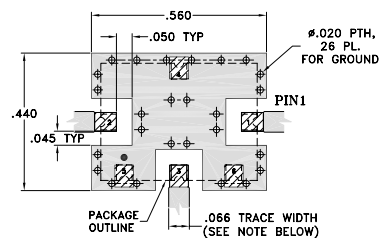

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350 WITH DIELECTRIC THICKNESS 0.030" ± 0.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. IF YOUR PCB DESIGN RULES ALLOW, GROUND VIAS SHOULD BE PLACED UNDER THE LAND PATTERN FOR BETTER RF PERFORMANCE. OTHERWISE GROUND VIAS SHOULD BE PLACED AS CLOSE TO LAND PATTERN AS POSSIBLE.
3. GROUND PAD SHALL BE FREE OF SOLDERMASK IF REQUIRED FOR SOLDERING.

■ DENOTES PCB COPPER LAYOUT
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

REV. A
M93650
SYM-30DLHW
DJ/TD/CP
040517
Page 1 of 2

Typical Performance Data

Frequency		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF port (:1)	VSWR LO port (:1)
RF MHz	LO MHz	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm
5.10	35.11	6.58	35.88	38.87	1.13	1.62
100.10	130.11	6.53	36.17	43.33	1.08	1.61
221.15	251.16	6.50	36.39	43.27	1.13	1.60
434.31	464.32	6.51	36.54	43.55	1.26	1.57
647.47	677.48	6.40	36.89	43.37	1.43	1.53
860.63	890.64	6.55	37.21	44.80	1.62	1.50
1073.78	1103.79	6.73	38.11	47.46	1.76	1.46
1215.89	1245.90	6.36	38.74	50.49	1.80	1.44
1429.05	1459.06	6.22	38.31	55.18	1.69	1.37
1600.10	1630.11	6.19	37.88	58.14	1.50	1.33
1815.49	1845.50	6.36	35.43	54.55	1.29	1.22
2030.87	2060.88	6.80	32.79	49.03	1.27	1.13
2246.25	2276.26	7.17	31.15	51.13	1.32	1.04
2353.95	2383.96	7.26	30.54	54.00	1.27	1.01
2461.64	2491.65	7.28	30.28	53.61	1.17	1.07
2569.33	2599.34	7.27	30.13	51.62	1.03	1.15
2677.02	2707.03	7.33	30.10	48.05	1.13	1.24
2784.72	2814.73	7.43	30.14	46.47	1.29	1.33
2892.41	2922.42	7.53	30.39	43.08	1.45	1.43
3000.10	3030.11	7.67	32.41	40.55	1.57	1.51

Performance Charts

