



SILERGY

SYT07S05SBC

Ultra-Low Capacitance TVS Protection

Features

- Transient protection for super-speed data lines
IEC 61000-4-2 (ESD) $\pm 20\text{kV}$ (Air)
 $\pm 20\text{kV}$ (Contact)
- ESD protection for super-speed differential signal (above 5Gb/s) channels
- Fast turn-on and low clamping voltage
- Protects six data lines and one VCC line
- Ultra-low capacitance: 0.20pF Typical (I/O-I/O)
- Low leakage current: $0.1\mu\text{A}$ @ V_{RWM} (Typical)
- Back-drive protection for power-down mode
- Each I/O pin can withstand over 1000 ESD strikes for $\pm 8\text{kV}$ contact discharge

Description

SYT07S05 is an ultra-low capacitance Transient Voltage Suppressor (TVS) designed to provide electrostatic discharge (ESD) protection for super-speed data interfaces. With typical capacitance of 0.20pF only, SYT07S05 is designed to protect parasitic-sensitive systems against over-voltage and over-current transient events. It complies with IEC 61000-4-2 (ESD) ($\pm 20\text{kV}$ air, $\pm 20\text{kV}$ contact discharge).

SYT07S05 uses a DFN4120-10L package. Each SYT07S05 device can protect six super-speed data lines and one VCC line. The combined features of ultra-low capacitance, small size and high ESD robustness make SYT07S05 ideal for super-speed data ports and high-frequency lines (e.g., HDMI & DVI) applications. The low clamping voltage of the SYT07S05 guarantees a minimum stress on the protected IC.


Applications

- USB3.0 Power and Data Line Protection
- Desktops, Servers and Notebooks
- MDDI Ports
- Display Ports
- High Definition Multi-Media Interface (HDMI)
- Digital Visual Interfaces (DVI)


Mechanical Characteristics

- DFN4120-10L package
- Flammability Rating: UL 94V-0
- Marking: Part number, Date
- Packaging: Tape and Reel

Circuit Diagram

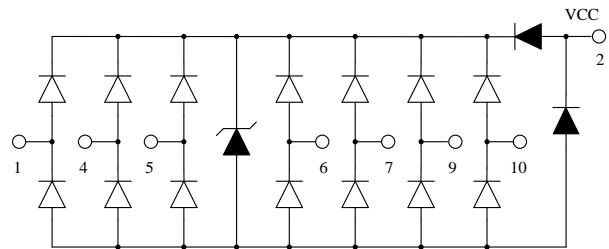

Pin Configuration

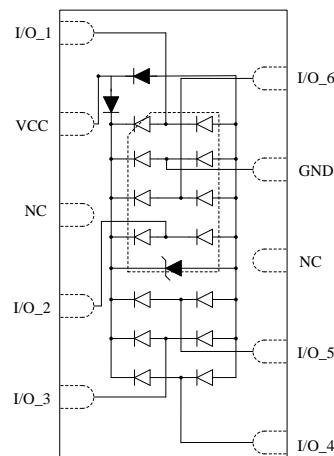

DFN4120-10L


(Top View, not to scale)

Absolute Maximum Rating

Symbol	Parameter	Value	Units
V_{ESD}	ESD per IEC 61000-4-2 (Air)	± 20	kV
	ESD per IEC 61000-4-2 (Contact)	± 20	
T_{OPT}	Operating Temperature	-55/+125	°C
T_{STG}	Storage Temperature	-55/+150	°C


Electrical Characteristics (T = 25°C)

Symbol	Parameter
V_{RWM}	Nominal Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Reverse Breakdown Voltage @ I_T
I_T	Test Current for Reverse Breakdown
V_C	Clamping Voltage @ I_{PP}
I_{PP}	Maximum Peak Pulse Current
C_{ESD}	Parasitic Capacitance
V_R	Reverse Voltage
R_{Dyn}	Dynamic Turn on Resistance
I_F	Forward Current
V_F	Forward Voltage @ I_F

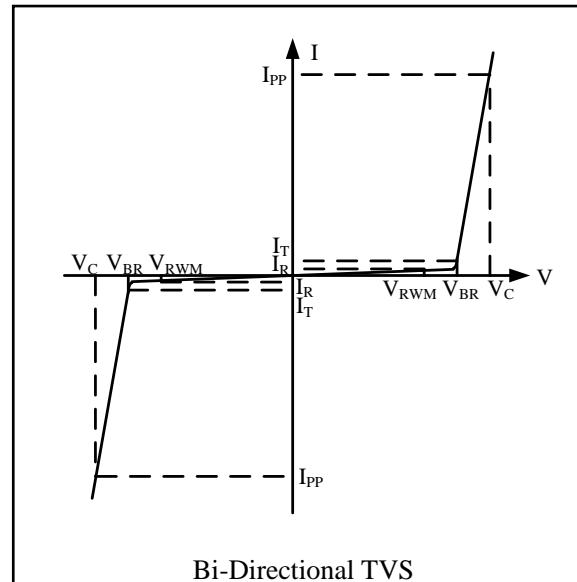


Symbol	Test Condition	Minimum	Typical	Maximum	Units
V_{RWM}				5.0	V
I_R	$V_{RWM} = 5V$, Between Any Pin and GND		0.1	1.0	μA
$I_{R_I/O-I/O}$	$V_{RWM} = 5V$, Between Any I/O Pins		0.1	1.0	μA
V_{BR}	$I_T = 1mA$, Between Any Pin and GND	6.0			V
V_F	$I_F = 15mA$, TVS Diode Forward Voltage		0.8	1.2	V
$V_{C_I/O}$	IEC 61000-4-2 Contact +6kV, Between Any I/O and GND		11		V
V_{C_VCC}	IEC 61000-4-2 Contact +6kV, Between VCC and GND		10		V
R_{Dyn}	IEC 61000-4-2 Contact +6kV, Between Any Pin and GND		0.3		ohm
V_C	$I_{PP} = 1A$, $t_p = 8/20\mu s$ Between Any Pin and GND			12	V
C_{ESD}	$V_R = 0V$, $f = 1MHz$ Between Any Pin and GND		0.20	0.35	pF
$C_{ESD_I/O-I/O}$	$V_{VCC} = 5V$, $V_{GND}=0V$, $V_R=2.5V$, $f = 1MHz$, Between Any I/O Pins			0.05	pF

Voltage Sweeping of I/O to GND

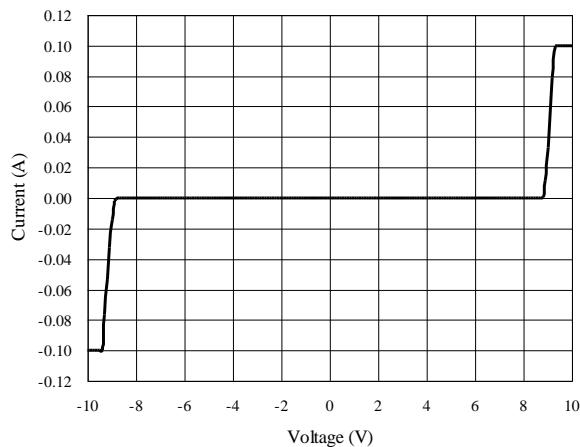


Insertion Loss S21 of I/O to GND

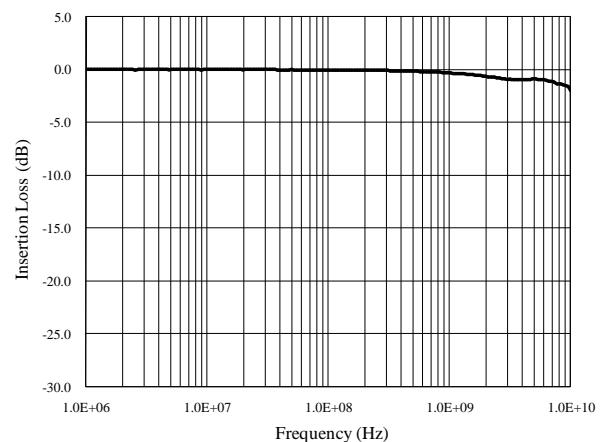


Capacitance vs. Voltage of I/O to GND (f = 1MHz)


Capacitance vs. Reverse Voltage

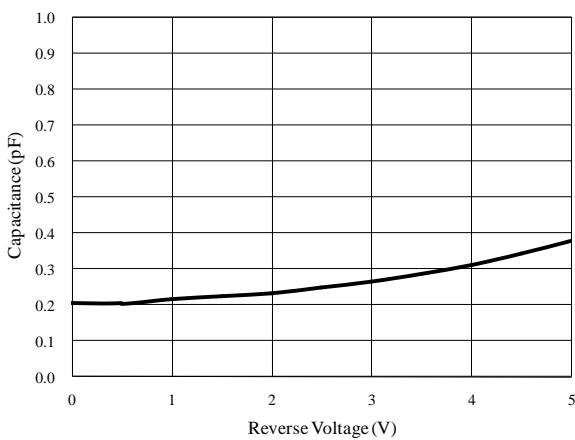


Normalized Capacitance vs. Reverse Voltage

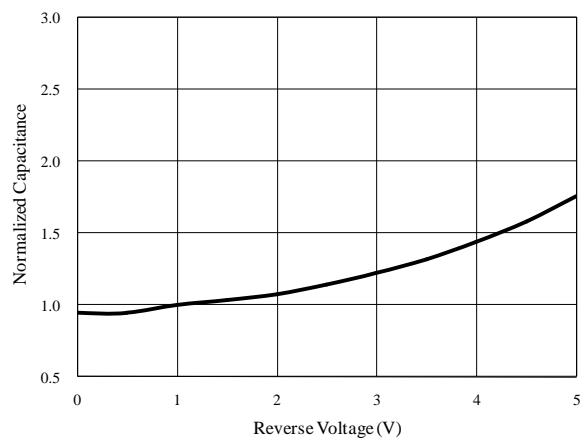

ESD Clamping of I/O to GND (+8kV Contact per IEC 61000-4-2)

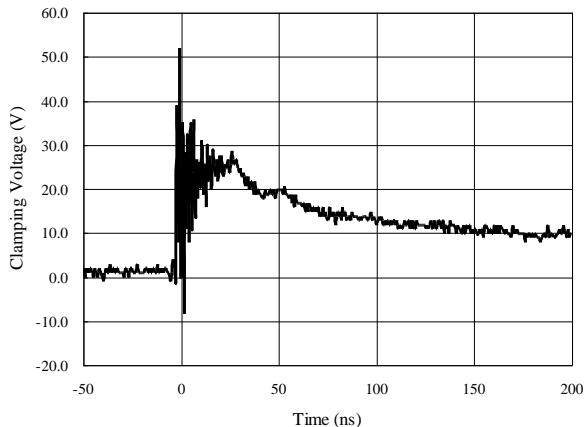

ESD Clamping of I/O to GND (-8kV Contact per IEC 61000-4-2)

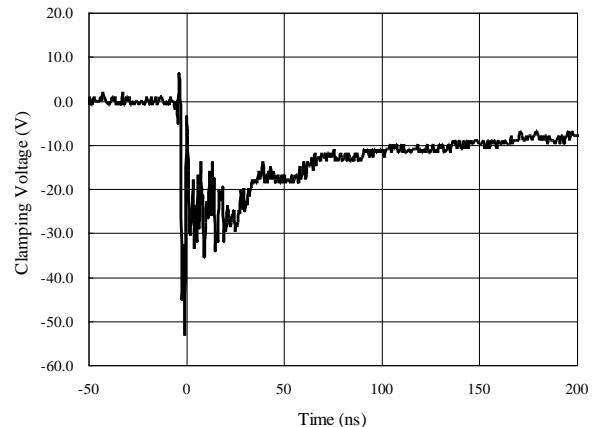

Application Information

Pin Connection in PCB

SYT07S05 provides ESD protection for six data lines and one power rail line simultaneously. The pin connection is shown in Figure 1.

Six parallel data lines, from inner IC to I/O port connector, could connect to SYT07S05 six I/O pins directly. Pin 9 of SYT07S05 is the GND pin, which should connect to the GND of PCB. The wire should be as short as possible in order to minimize the parasitic inductance. Pin 2 of SYT07S05 is the VCC pin, which should connect to the VCC rail of PCB.

In some cases, systems are not allowed to be reset or restart after zapping ESD stress at the I/O port connector. Under this situation, to enhance the sustainable ESD level, a $0.1\mu\text{F}$ capacitor can be used between the VCC and GND rails. Place the capacitor as close as possible to SYT07S05.

In some cases, VCC rail is not presented on the PCB. Under this situation, the pin 2 of SYT07S05 can be left as floating. The pin connection is shown in Figure 2.

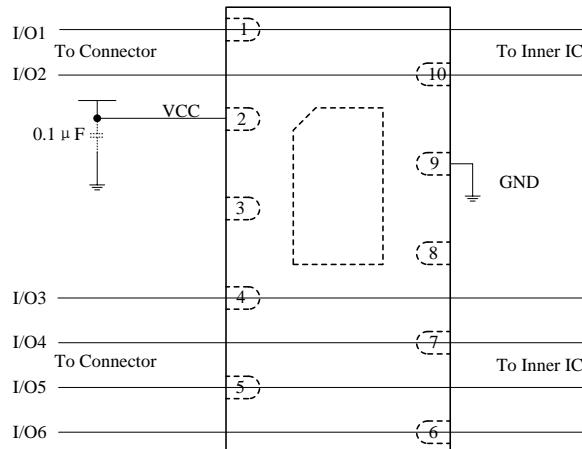


Figure 1 SYT07S05 pin connection in PCB providing data lines and power rail line protection.

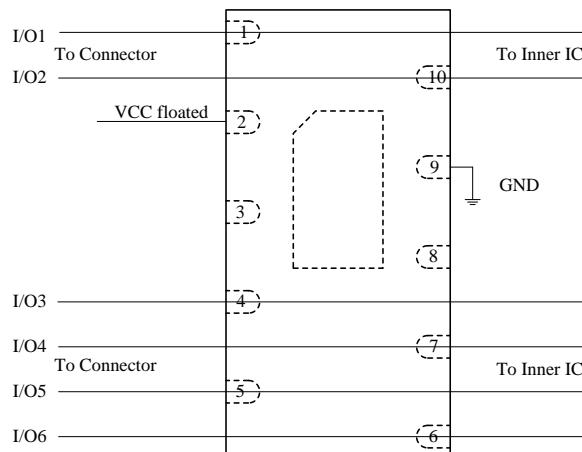


Figure 2 SYT07S05 pin connection in PCB providing data line protection.

VCC pin is left as floating when no VCC rail is presented in PCB.

Application Information

USB3.0 Protection for Super Speed Differential signals

SYT07S05 provides ESD protection for super-speed data lines. Thus, a lot of kinds of high speed I/O ports can be the applications of SYT07S05, especially, the USB3.0 port.

USB3.0 is expected to transmit and receive above 5Gb/s data, which needs differential signaling. For differential signaling, keep the differential impedance at constant is the most importance.

ESD protection devices have an inherent junction capacitance. Usually, this added capacitance on a

USB3.0 port will drop the impedance of the differential pair to interfere with the signaling. SYT07S05 presents only 0.4pF maximum capacitance to each differential signal while being rated to handle 8kV ESD contact/air discharges as outlined in IEC 61000-4-2 and providing a low clamping voltage to protect the downstream devices. Therefore, SYT07S05 is the most suitable ESD protector for USB3.0 I/O ports and other high speed, above 5Gb/s, I/O ports in any electronic product. Figure 3 shows the pin connection example for USB3.0 I/O ports.


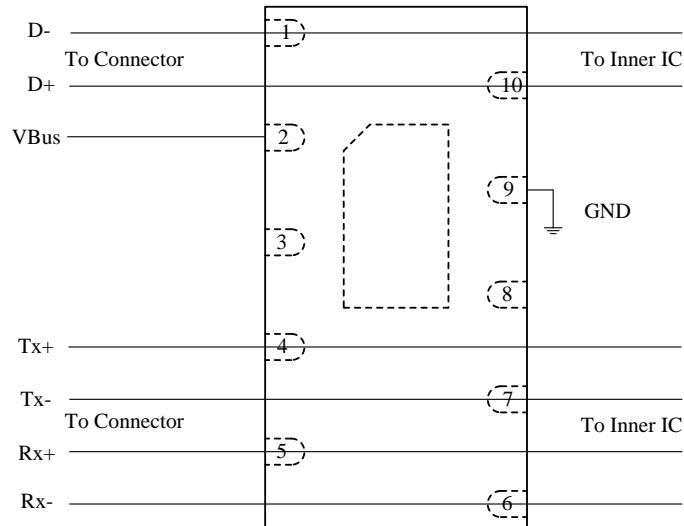


Figure 3 SYT07S05 pin connection for USB3.0 protection.

Package Outline


- DFN4120-10L package

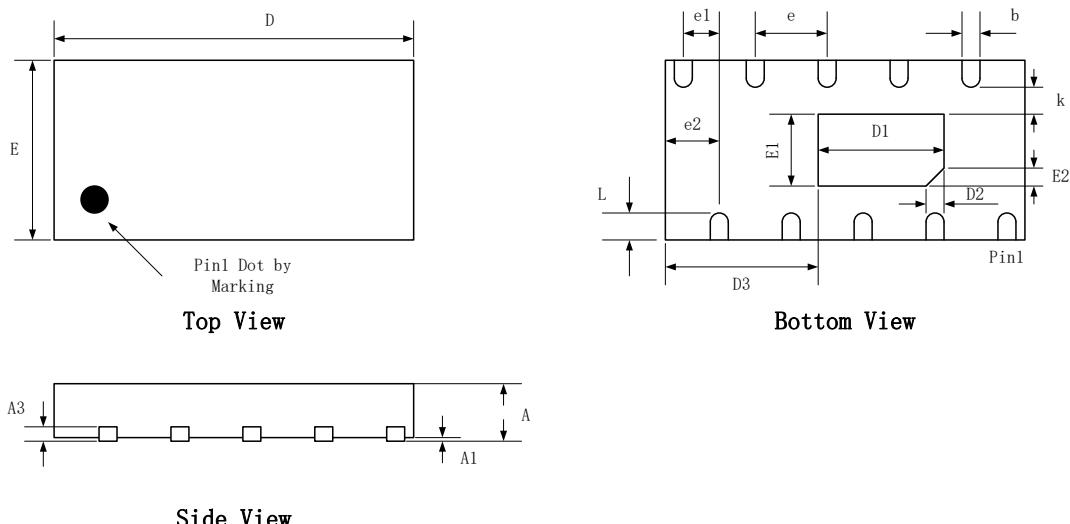

Package Dimensions (Controlling dimensions are in millimeters)


Symbol	Dimensions (mm)		Dimensions (Inches)	
	Minimum	Maximum	Minimum	Maximum
A	0.450	0.650	0.018	0.026
A1	0.000	0.050	0.000	0.002
A3	0.152REF		0.006REF	
D	4.050	4.150	0.159	0.163
E	1.950	2.050	0.077	0.081
D1	1.300	1.500	0.051	0.059
E1	0.700	0.900	0.028	0.035
D3	1.650	1.850	0.065	0.073
D2	0.200REF		0.008REF	
E2	0.200REF		0.008REF	
k	0.200MIN		0.008MIN	
b	0.150	0.250	0.006	0.010
e	0.800TYP		0.031TYP	
e1	0.350	0.450	0.014	0.018
e2	0.600	0.700	0.024	0.028
L	0.250	0.350	0.010	0.014

Tape and Reel Specification

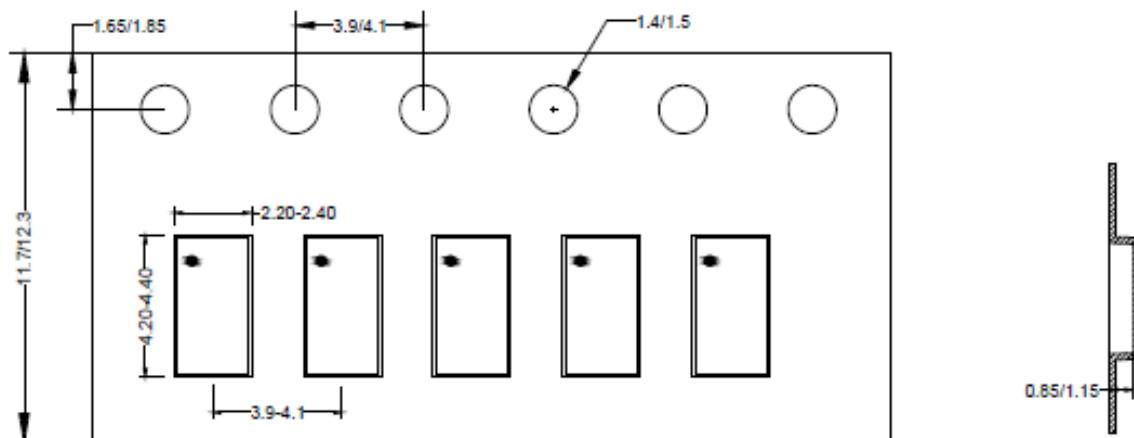

Package types	Tape width (mm)	Pocket pitch(mm)	Reel size (Inch)	Trailer * length(mm)	Leader * length (mm)	Qty per reel (pcs)
DFN4.1*2-10	12	4	13"	400	400	5000

Marking Codes

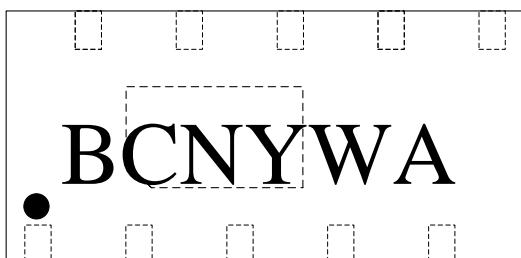

Ordering Information

Part Number	Working Voltage	Quantity Per Reel	Reel Size
SYT07S05SBC	5V	5,000	13 Inch

Note:

- (1) BCN is the part number, fixed.
- (2) "Y" is year code, from 0 to 9;
- "W" is date code, from A to Z.
- (3) "A" is the production lot number, from A to Z.

IMPORTANT NOTICE

1. **Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.
2. **Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.
3. **Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.
4. **Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.
5. **Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.
6. **No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

© 2018 Silergy Corp.

All Rights Reserved.