

CRYSTAL CLEAR TECHNOLOGY

Product Specification

T154X02N00

(Formally known as T154B02N00)

(REVISION1)

Crystal Clear Technology Sdn. Bhd.

16 Jalan TP5, Taman Perindustrian Sime UEP,

47600 Subang Jaya, Selangor DE

Tel: +603-80247099

Website: www.cct.com.my



1.0 Table of Contents

No	Title	Page
1	Table of Contents	1
2	Record of revision	2
3	General Specification	3
4	Absolute Maximum Ratings	5
5	Electrical Characteristics and Instruction Code	6
6	AC Characteristics	8
7	Optical Characteristics	8
8	RA Test Condition	11
9	Inspection Criteria	12
10	Appearance Specification	15
11	Precaution and Limited Warranty	16
12	Mechanical Specification	21



2.0 Records of Revision

Rev	Date	Item	Page	Comment	Originator	Checked By
1.0	15.02.16			Initial Release	Azhar	Liew




3.0 General Specification

T154A02N00 is 1.54" color TFT-LCD (Thin Film Transistor Liquid Crystal Display) module composed of LCD panel, driver ICs control circuit, LED backlight and Touch Panel. This display area contains 240 X 240 pixels and can display up to 65K colors. This product compliant with RoHS environmental requirement.

Item	Contents	Unit	Note
LCD Type	1.54" IPS	-	
Display color	65K		1
Viewing Direction (Optimum View)	All Direction	O 'Clock	
Operating temperature	-20~+70	°C	
Storage temperature	-30~+80	°C	
Module size	31.72 x 3372 x 1.6	mm	2
Active Area(W×H)	27.72 x 27.72	mm	
Number of Dots	240×RGB×240	dots	
Controller	ST7789	-	
Backlight	3 White LEDs	pcs	
Brightness	300	cd/m2	
Interface Mode	8080 MCU 8BIT	-	

Note 1: Color tone is slightly changed by temperature and driving voltage.

Note 2: FPC or wire are not included.

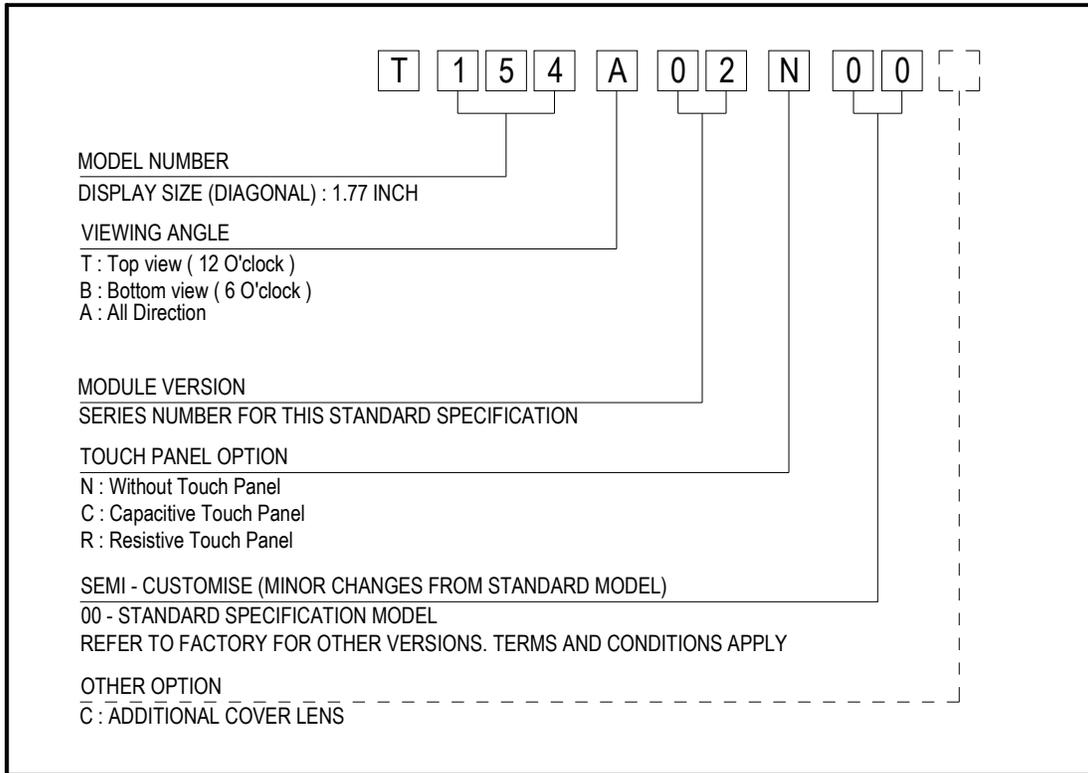



4.0 Absolute Maximum Ratings

4.1 Electrical Absolute Maximum ratings (Vss = 0V, Ta = 25°C)

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	VDD2D8V	-0.3	4.6	V	1, 2
Logic Signal Input /Output Voltage	VDD1D8V	-0.3	VDD1D8V+0.3	V	

Notes:

1. If the module is above these absolute maximum ratings. It may become permanently damaged.
2. $V_{CC} > V_{SS}$ must be maintained.
3. Please be sure users are grounded when handing LCD Module.

4.2 Environmental Absolute Maximum Ratings

Item	Storage		Operating		Note
	MIN.	MAX.	MIN.	MAX.	
Ambient Temperature	-30°C	80°C	-20°C	70°C	1,2
Humidity	-	-	-	-	3

1. The response time will become lower when operated at low temperature.
2. Background color changes slightly depending on ambient temperature. The phenomenon is reversible.
3. $T_a \leq 40^\circ\text{C}$ and 85%RH MAX.
($T_a > 40^\circ\text{C}$. Absolute humidity must be lower than the humidity of 85%RH at 40°C)

**5.0 Electrical Characteristics and Instruction Code****5.1 Electrical Characteristics (V_{ss} = 0V, T_a = 25°C)**

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
Power supply	VDD2D8V	T _a =25°C	2.7	2.8	2.9	V	
Input voltage	'H'	V _{IH}	V _{DD} =2.8V	0.78V _{DD}	-	V _{DD}	V
	'L'	V _{IL}	V _{DD} =2.8V	-0.3	-	0.2V _{DD}	V
Output Voltage	'H'	V _{OH}		0.8V _{DD}	-	-	V
	'L'	V _{OL}		GND	-	0.2V _{DD}	V

Note:

- 1: When an optimum contrast is obtained in transmissive mode.
- 2: Tested in 1X1 chessboard pattern.

5.2 LED Backlight Specification (V_{ss} = 0V, T_a = 25°C)

Item	Symbol	Condition	Min	Typ	Max	Unit	Note
Supply Voltage	V _{LED}	-	2.9	3.1	3.3	V	1
Supply Current	I _f	-	-	60	-	mA	2
Led lifetime			20000				3

Note:

1. V_{LED}=V_{LED} (+)-V_{LED} (-).
2. It is recommended that customer supply constant current to prolong the led lifetime and optimum led performance
3. Definition of Lifetime: Luminance < 50% of initial Luminance
(Test condition: T_a = 25°C, Constant current supply (typical Value))

**5.3 Interface Signal**

Pin No.	Symbol	I/O	Function
1	GND	0V	The system ground
2	VDD1D8V	2.8V/1.8V	Power Supply for I/O system
3	GND	0V	The system Ground
4	VDD2D8V	2.8V	Power Supply for analog, Digital System and booster Circuit
5	RD		Read Enable in 8080MCU Parallel Interface
6	WR		Write Enable in MCU Parallel Interface
7	DCX/SCL		Display data/command selection pin in parallel interface
8	CS		Chip Selection Pin Low Enable
9	RESET		Reset pin
10	SDA		Serial Input Signal
11	DB7		Data Bus Line
12	DB6		Data Bus Line
13	DB5		Data Bus Line
14	DB4		Data Bus Line
15	DB3		Data Bus Line
16	DB2		Data Bus Line
17	DB1		Data Bus Line
18	DB0		Data Bus Line
19	LEDA		Backlight Voltage
20	LEDK		Backlight Ground



6.0 AC characteristics

Refer to IC datasheet for detail information.

7.0 Optical Characteristics

Items	Symbol	Condition	Min	Typ	Max	Unit	Remark
Response Time	Tr + Tf	$\Theta = 0^\circ$ $\varnothing = 0^\circ$ $T_a = 25^\circ\text{C}$	-	35	50	ms	Note5
Contrast Ratio	Cr		-	900	-	-	Note4
Uniformity	Δ White		80		-	%	Note2
Surface Luminance	Lv			300		cd/m2	Note1
Viewing Angle	$\theta_3 = 90$	CR>10		80		°	Note3
	$\theta_9 = 270$			80			
	$\theta_{12} = 0$			80			
	$\theta_6 = 180$			80			
CIE (X, Y) Chromaticity	White	X_W	-0.02	0.626	+0.02	-	Note6
		Y_W		0.310		-	
	Red	X_R		0.290		-	
		Y_R		0.518		-	
	Green	X_G		0.144		-	
		Y_G		0.139		-	
	Blue	X_B		0.295		-	
		Y_B		0.325		-	


Note: The parameter is slightly changed by temperature, driving voltage and material

Note 1: The data are measured after LEDs are turned on for 5 minutes. LCM displays full white. The brightness is the average value of 9 measured spots. Measurement equipment PR-705 (Φ8mm)

Measuring condition:

- Measuring surroundings: Dark room.
- Measuring temperature: $T_a=25^\circ\text{C}$.
- Adjust operating voltage to get optimum contrast at the center of the display.


Measured value at the center point of LCD panel after more than 5 minutes while backlight turning on.

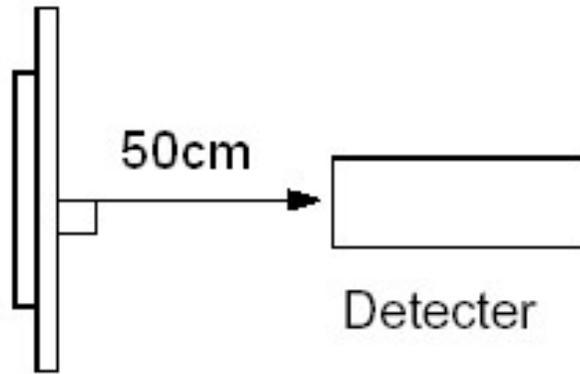

Note 2: The luminance uniformity is calculated by using following formula.


$$\Delta Bp = Bp (\text{Min.}) / Bp (\text{Max.}) \times 100 (\%)$$

$Bp (\text{Max.})$ = Maximum brightness in 9 measured spots
 $Bp (\text{Min.})$ = Minimum brightness in 9 measured spots.

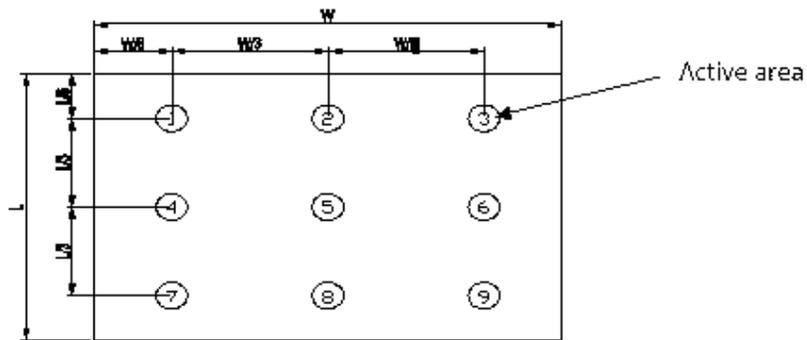


Note 3: The definition of viewing angle:

Refer to the graph below marked by θ and ϕ

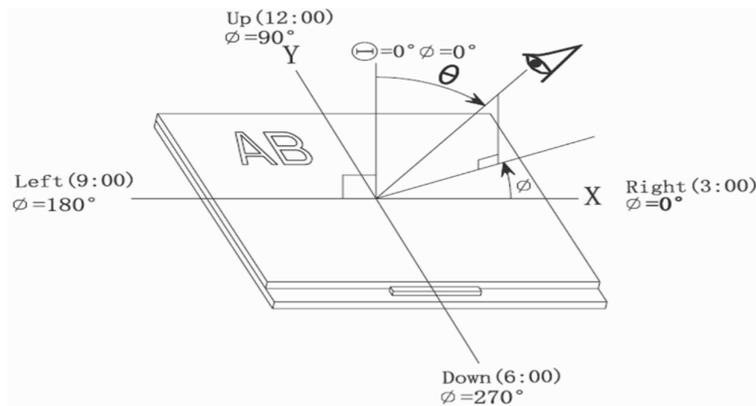


Note 4: Definition of contrast ratio. (Test LCD using DMS501)

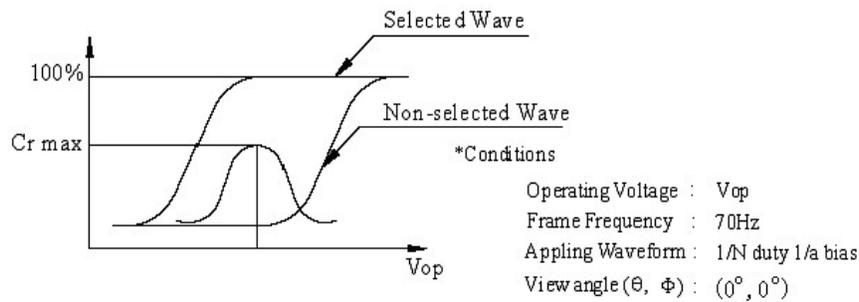


$$\text{Contrast ratio (Cr)} = \frac{\text{Brightness of selected dots}}{\text{Brightness of non-selected dots}}$$

Note 5: Definition of Response time. (Test LCD using DMS501):

The output signals of photo detector are measured when the input signals are changed from “black” to “white”(falling time) and from “white” to “black”(rising time), respectively. The response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to figure as below.

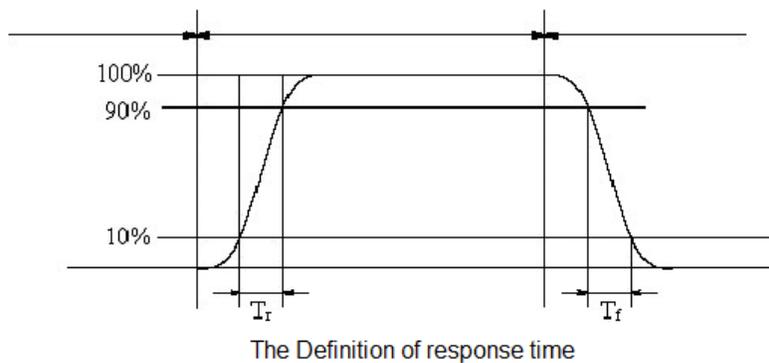


Note 6: Definition of Color of CIE Coordinate and NTSC Ratio.

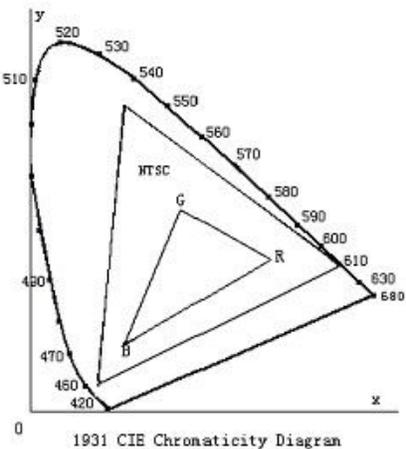



Note 7: Definition of cross talk.

Cross talk ratio (%) = [pattern A Brightness-pattern B Brightness]/pattern A

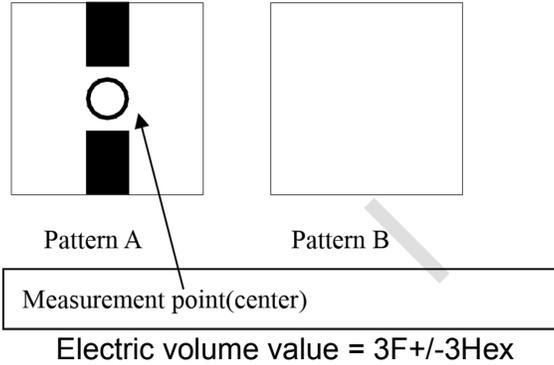

8.0 RA Test Condition



Item		Test Condition
Operating	High Temperature	70degC, 96 hrs
	Low Temperature	-20degC,96 hrs
Storage	High Temperature	80degC, 240hrs and recovery for 2hrs
	Low Temperature	-30degC, 240hrs and recovery for 2hrs
	High Temperature and High Humidity	50degC, 90%RH, 240hrs and recovery for 2 hrs
Thermal	Cycle	Rt → 20degV → Rt → 70degC → RT 0min 30min 5min 30min 5min 50 cycles (Power off)
	Shock	Rt → 20degV → 70degC 0min 30min 30min 50 cycles (Power off)

Note: Rt means Room temperature



9.0 Inspection Criteria

9.1 Definition of Inspection Range
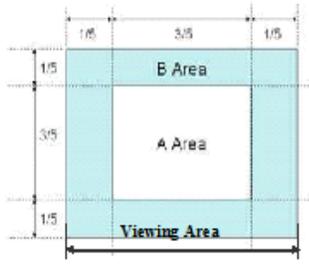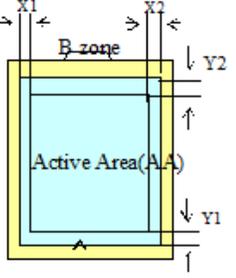
<p>For dot detect of TFT LCD which is not smaller than 3 inches, dividing three areas to make a judgement (according to figure1) A area: Centre of viewing area B area: Periphery of viewing area C area: Outside of Viewing area For other defects, dividing two area to make a judgement (according to figure 2) A zone: Inside Viewing area B zone: Outside Viewing area $X1(A/A \sim V/A): 2mm$ $X2(A/A \sim V/A): 2mm$ $Y1(A/A \sim V/A): 2mm$ $Y2(A/A \sim V/A): 2mm$</p>	 <p>Figure 1 area</p>  <p>A zone = Viewing area Figure 2</p>
---	---

9.2 Inspection items and General Notes.




<p>General notes</p>	<ol style="list-style-type: none"> ① Should any defects which are not specified in this standard happen, additional standard shall be determined by mutual agreement between customer and CCT. ② Viewing area should be the area which CCT guarantees. ③ Limit sample should be prior to this Inspection standard. ④ Viewing judgment should be under static pattern. ⑤ Inspection conditions Inspection distance: 250 mm (from the sample), Temperature: 25±5 °C Inspection angle: 45 degrees in 12 o'clock direction (all defects in viewing area should be inspected from this direction)
----------------------	---



9.3 Inspection items and Criteria (for TFT module)

Inspection items			Judgment standard			
			Category		Acceptable number	
					A zone	B zone
1	Black spot, White spot, Pinhole, Foreign Particle, Particle in or on glass, Scratch on glass		A	$\Phi \leq 0.10$	Neglected	Neglected
			B	$0.10 < \Phi \leq 0.2$	1	
			C	$0.2 < \Phi$	0	
			D	-	-	
			Total defective point(B,C)		1	
2	Black line, White line, and Particle Between Polarizer and glass, Scratch on glass		A	$W \leq 0.02$	Neglected	Neglected
			B	$0.02 < W \leq 0.03$ $L \leq 1.0$	1	
			C	$0.03 < W \leq 0.05$ $L > 1.0$	0	
			D	$0.05 < W, 1.0 < L$	0	
			Total defective point(B,C)		1	
3	Electrical Dot Defect	Brightspot and Black dot definition: and Two Adjacent Dot				
		Inspection pattern: Full white. Full black, red, green and blue screens				
		Item		Acceptable Quantity		
				I	O	No te
		Black dot defect		2		$\phi \leq 0.15$ (5mm ≤ D istance)
		Bright dot defect		1		
Two Adjacent Dot		1				
Three or more Adjacent Dot		Not allowed				
Total Dot		2				



4	Contrast variation	 $\Phi = (a+b)/2$ (mm)	A	$\Phi < 0.2$	Neglected	Neglected
			B	$0.2 < \Phi \leq 0.3$	2	
			C	$0.3 < \Phi \leq 0.4$	1	
			D	$0.4 < \Phi$	0	
			Total defective point(B,C)		3	
5	Polarizer Dent/Bubber	Size ϕ (mm)	Acceptable Quantity			
		$\phi \leq 0.2$	Ignore			
		$0.2 < \phi \leq 0.3$	2			
		$0.3 < \phi \leq 0.5$	1			
		$0.5 < \phi$	Not allowed			
		Total quantity	3			
6	Surplus glass	 Stage surplus glass	$B \leq 0.3\text{mm}$			
		 Surrounding surplus glass	Should not influence outline dimension and assembling.			
7	Open segment or open common	Not permitted				
8	Short circuit	Not permitted				
9	False viewing direction	Not permitted				
10	Contrast ratio uneven	According to the limit specimen				
11	Crosstalk	According to the limit specimen				
12	Black /White spot(display)	Refer to item 1				
13	Black /White line(display)	Refer to item 2				



10.0 Appearance Specification



The following description is defined to offer cosmetic specification for meeting Customer Incoming Inspection.

Inspection Item	Criteria	Portray
Black/White Spot	<ul style="list-style-type: none"> - $D \leq 0.1\text{mm}$, ignore - $0.1\text{mm} < D \leq 0.2\text{mm}$, Acceptable $\leq 3\text{pcs}$ Distance $> 10\text{mm}$ - $0.2\text{mm} < D \leq 0.25\text{mm}$, Acceptable $\leq 2\text{pcs}$ Distance $> 10\text{mm}$ - $D > 0.25\text{mm}$ Not allowed TA area outside ignore 	
Scratch	<ul style="list-style-type: none"> - $W \leq 0.01\text{mm}$ and $L \leq 5\text{mm}$ allowed 1pcs - $W \leq 0.02\text{mm}$ and $L \leq 3\text{mm}$ allowed 1pcs - $W \leq 0.03\text{mm}$ and $L \leq 1\text{mm}$ allowed 1pcs - $W > 0.03\text{mm}$ or $L > 5\text{mm}$ Not allowed TA area outside ignore 	
Linear type/foreign fiber	<ul style="list-style-type: none"> - $W \leq 0.01\text{mm}$ and $L \leq 5\text{mm}$ allowed 1pcs - $W \leq 0.02\text{mm}$ and $L \leq 3\text{mm}$ allowed 1pcs - $W \leq 0.03\text{mm}$ and $L \leq 1\text{mm}$ allowed 1pcs - $W > 0.03\text{mm}$ or $L > 5\text{mm}$ Not allowed TA area outside ignore 	
Bubble/Dent	<ul style="list-style-type: none"> - $D \leq 0.1\text{mm}$, ignore - $0.2\text{mm} < D \leq 0.25\text{mm}$, Acceptable $\leq 2\text{ pcs}$, Distance $> 10\text{mm}$ - $D > 0.25\text{mm}$ Not allowed TA area outside ignore 	
ITO corner chipping	<ul style="list-style-type: none"> - $X \leq 1.0\text{ mm}$ and $Y \leq 0.5\text{ mm}$,ignore - $X \leq 1.5\text{ mm}$ and $Y \leq 0.25\text{ mm}$ 	
ITO edge chipping	<ul style="list-style-type: none"> - $X \leq 1.0\text{ mm}$ and $Y \leq 0.5\text{ mm}$,ignore - $X \leq 1.5\text{ mm}$ and $Y \leq 0.25\text{ mm}$ 	
Crack	No allowed	

Note:

- The foreign material that can be blown out by air or washed out by wet cleaner are not considered as defect.
- Inspection Environment conditions
 Temperature: $25 \pm 5^\circ\text{C}$, Humidity: $55 \pm 10\% \text{RH}$
 Illumination: At least 1.5K Lux, Light Source: Fluorescent Light
 Inspection Viewing Distance: $30 \pm 5\text{cm}$

Inspection Viewing Angle: The surface of the panel and inspector eyes shall be $90^\circ \pm 45^\circ$
 Background: Black

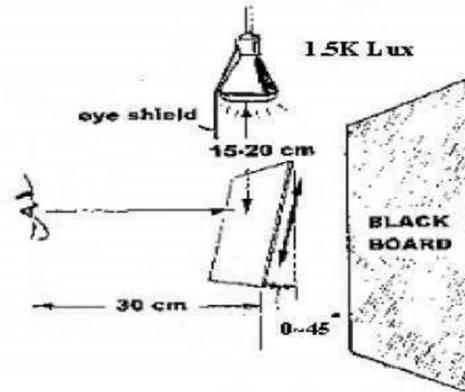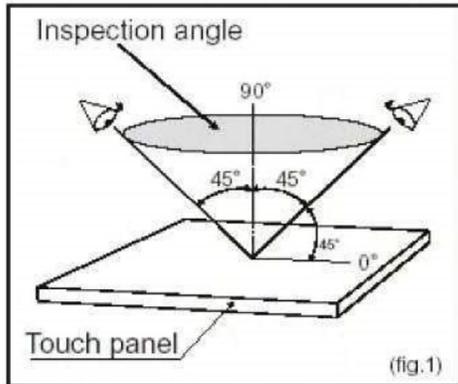

11.0 Precaution and Limited Warranty

1. Handling Precautions

- a. The display panel is made of glass and polarizer. As glass is fragile. It tends to chip during handling especially on the edges. Please avoid dropping or jarring. Do not subject it to a mechanical shock of impact or by dropping it.
- b. If the display panel is damaged and the liquid crystal substance leaks out, be sure not to get any in your mouth. If the substance is in contact with your skin or clothes, wash it off using soap and water.
- c. Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary. Do not touch the display with bare hands. This will stain the display area and degrade the insulation between terminals. Scratch and dents may occur on polarizer too.
- d. The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully. Do not touch, push or rub the exposed polarizers with anything harder than a HB pencil lead (glass, tweezers, etc.). Do not put or attach anything on the display area to avoid leaving marks on it. Condensation on the surface and contact with terminals due to cold will damage, stain or dirty the polarizer. After products are tested at low temperature they must be warmed up in a container before coming in to contact with room temperature air.
- e. If the display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten cloth with one of the following solvents
 - Isopropyl alcohol
 - Ethyl alcohol
 - Do not scrub hard to avoid damaging the display surface.
- f. Solvents other than those above-mentioned may damage the polarizer. Especially, do not use the following.
 - Water
 - Ketone
 - Aromatic solvents
 - Wipe off saliva or water drops immediately, contact with water over a long period of time may cause deformation or colour fading. Avoid contact with oil and fats.
- g. Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.



- h. Install the LCD Module by using the mounting holes. When mounting the LCD module make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the I/O cable or the backlight cable.
- i. Do not attempt to disassemble or process the LCD module.
- j. NC terminal should be open. Do not connect anything.
- k. If the logic circuit power is off, do not apply the input signals.
- l. Electro-Static Discharge Control. Since this module uses a CMOS LSI, the same careful attention should be paid to electrostatic discharge as for an ordinary CMOS IC. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
 - Before removing LCM from its packing case or incorporating it into a set, be sure the module and your body have the same electric potential. Be sure to ground the body when handling the LCD modules.
 - Tools required for assembly, such as soldering irons, must be properly grounded. Make certain the AC power source for the soldering iron does not leak. When using an electric screwdriver to attach LCM, the screw driver should be of ground potentiality to minimize as much as possible any transmission of electromagnetic waves produced sparks coming from the commutator of the motor.
 - To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions. To reduce the generation of static electricity be careful that the air in the work environment is not too dry. A relative humidity of 50%-60% is recommended. As far as possible make the electric potential of your work clothes and that of the work bench the ground potential.
 - The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.
- m. Since LCM has been assembled and adjusted with a high degree of precision, avoid applying excessive shocks to the module or making any alterations or modifications to it.
 - Do not alter, modify or change the shape of the tab on the metal frame.
 - Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.
 - Do not damage or modify the pattern writing on the printed circuit board.
 - Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector.
 - Except for soldering the interface, do not make any alterations or modifications with a soldering iron.
 - Do not drop, bend or twist the LCM.

2. Storage Precautions

When storing the LCD modules, the following precaution are necessary.

- a. Store them in a sealed polyethylene bag. If properly sealed, there is no need for the desiccant.
- b. Store them in a dark place. Do not expose to sunlight or fluorescent light, keep the temperature between 0°C and 35°C, and keep the relative humidity between 40%RH and 60%RH.
- c. The polarizer surface should not come in contact with any other objects.

3. Others



- a. Liquid crystals solidify under low temperature (below the storage temperature range) leading to defective orientation or the generation of air bubbles (black or white). Air bubbles may also be generated if the module is subject to a low temperature.
- b. If the LCD modules have been operating for a long time showing the same display patterns, the display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. A normal operating status can be regained by suspending use for some time. It should be noted that this phenomenon does not adversely affect performance reliability.
- c. To minimize the performance degradation of the LCD modules resulting from destruction caused by static electricity etc. Exercise care to avoid holding the following sections when handling the modules.
 - Exposed area of the printed circuit board.
 - Terminal electrode sections.


4. Using LCD Modules

a. Installing LCD Modules


The hole in the printed circuit board is used to fix LCM as shown in the picture below.

Attend to the following items when installing the LCM.

- b. Cover the surface with a transparent protective plate to protect the polarizer and LC cell.

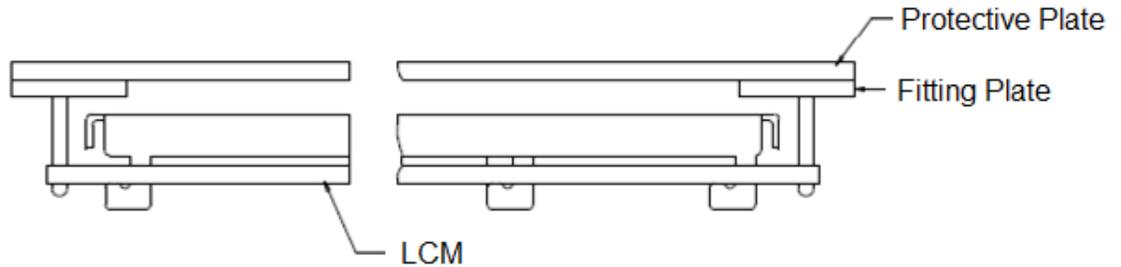

- c. When assembling the LCM into other equipment, the spacer to the bit between the LCM and the fitting plate should have enough height to avoid causing stress to the module surface, refer to the individual specifications for measurements. The measurement tolerance should be 0.1mm.
- d. Precaution for assemble the module with BTB connector:
Please note the position of the male and female connector position, don't assemble or assemble like the method which the following picture shows

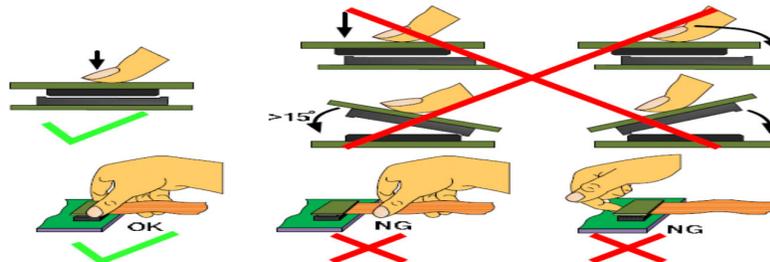

5. Precaution for soldering the LCM



	Manual soldering	Machine drag soldering	Machine press soldering
No RoHS Product	290°C ~350°C. Time: 3-5S.	330°C ~350°C. Speed: 4-8 mm/s.	300°C ~330°C. Time: 3-6S. Press: 0.8~1.2Mpa
RoHS Product	340°C ~370°C. Time: 3-5S.	350°C ~370°C. Time: 4-8 mm/s.	330°C ~360°C. Time: 3-6S. Press: 0.8~1.2Mpa

- a. If soldering flux is used, be sure to remove any remaining flux after finishing the soldering operation (This does not apply in the case of a non-halogen type of flux). It is recommended that you protect the LCD surface with a cover during soldering to prevent any damage due to flux spatters.
- b. When soldering the electroluminescent panel and PC board, the panel and board should not be detached more than three times. This maximum number is determined by the temperature and time conditions mentioned above, though there may be some variance depending on the temperature of the soldering iron.
- c. When removing the electroluminescent panel from the PC board, be sure the solder has completely melted, the soldered pad on the PC board could be damaged.

6. Precautions for Operation

- a. Viewing angle varies with the change of liquid crystal driving voltage (VLCD). Adjust VLCD to show the best contrast.
- b. It is recommended to drive LCD's within the specified voltage limit since over limit will cause shorter LCD life. An electrochemical reaction due to direct current causes LCD-deterioration. Avoid the use of direct current drive.
- c. Response time will be extremely delayed at lower temperature compared to room operating temperature range and on the other hand, at higher temperature LCD shows dark colour in them. However those phenomena do not mean malfunction. The LCD will return to normal performance when ambient temperature revert to room condition.
- d. If the display area is pushed hard during operation, the display will become abnormal. However, it will return to normal if it is turned off and on.
- e. A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit.
- f. Input logic voltage before apply analogue high voltage such as LCD driving voltage when power on. Remove analogue high voltage before logic voltage when power off the module. Input each signal after the positive/negative voltage becomes stable.
- g. Please keep the temperature within the specified range for use and storage. Polarization degradation, bubble generation or polarizer peel-off may occur with high temperature and high humidity.

7. Safety

- a. It is recommended to crush damaged or unnecessary LCDs into pieces and wash them off with solvents such as acetone and ethanol, which should later be burned.



- b. If any liquid leaks out of a damaged glass cell and comes in contact with the hands, wash off thoroughly with soap and water.

8. Limited Warranty


Unless otherwise agreed between Crystal Clear Technology and customer, Crystal Clear Technology will replace or repair any of its LCD and LCM which is found to be defective electrically and visually when inspected in accordance with Crystal Clear Technology acceptance standards, for a period of one year from date of shipment. Confirmation of such date shall be based on freight documents. The warranty liability of Crystal Clear Technology is limited to repair and/or replacement on the terms set forth above. Crystal Clear Technology will not responsible for any subsequent or consequential events.

9. Return LCM under Warranty



No warranty can be granted if the precautions stated above have been disregarded. The typical examples of violations are:

- Broken LCD glass
- PCB eyelet's damaged or modified
- PCB conductors damaged
- Circuit modified in any way, including addition of components.
- PCB tampered with by grinding, engraving or painting varnish.
- Soldering to, or modifying the bezel in any manner.

Module repairs will be invoiced to customer upon mutual agreement. Modules must be returned with sufficient description of failure or defects. Any connectors or cable installed by customer must be removed completely without damaging the PCB eyelet's, conductors and terminals.

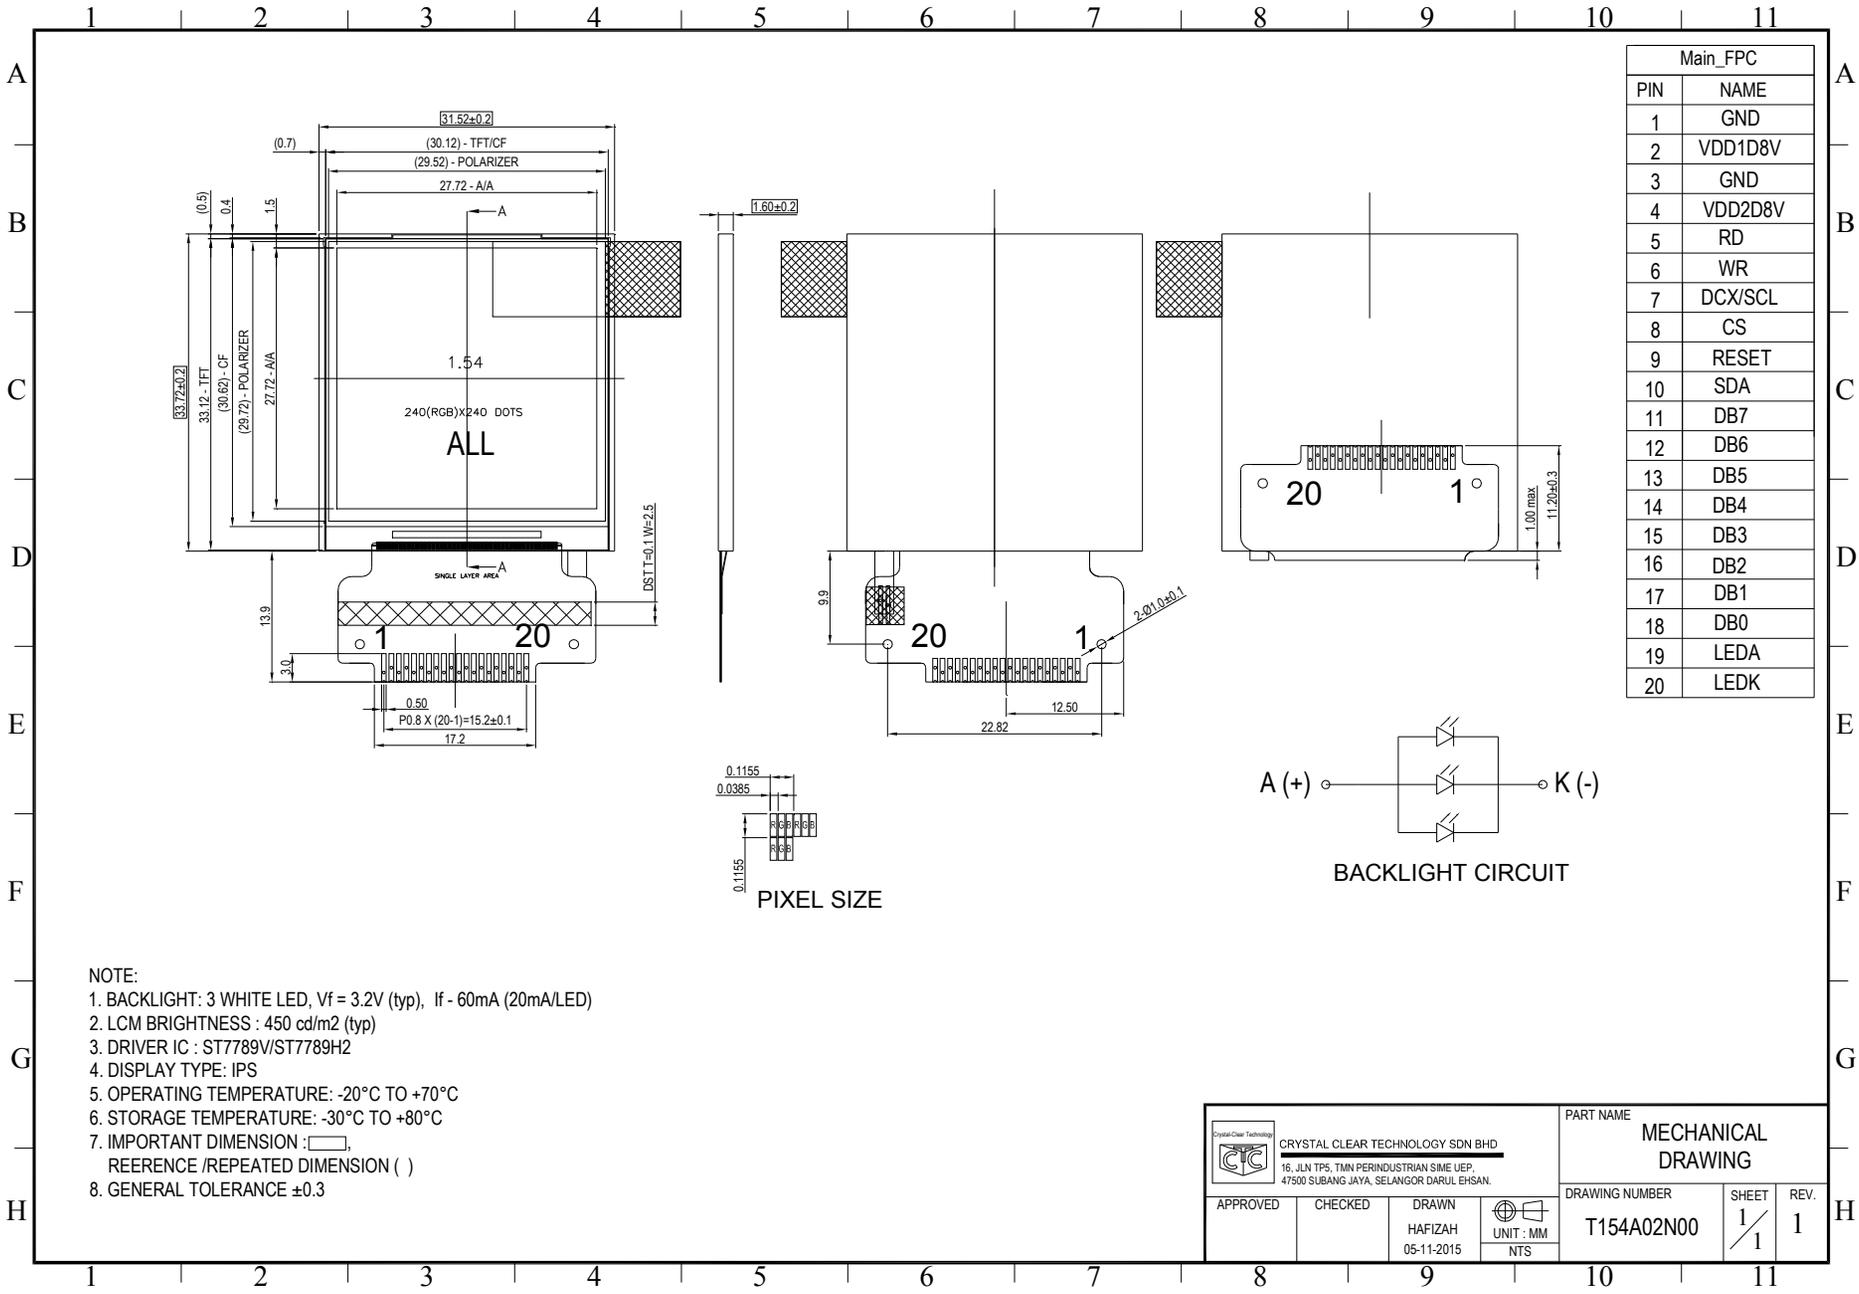

Main_FPC	
PIN	NAME
1	GND
2	VDD1D8V
3	GND
4	VDD2D8V
5	RD
6	WR
7	DCX/SCL
8	CS
9	RESET
10	SDA
11	DB7
12	DB6
13	DB5
14	DB4
15	DB3
16	DB2
17	DB1
18	DB0
19	LEDA
20	LEDK

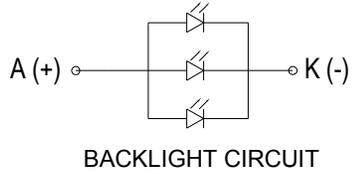

- NOTE:**
1. BACKLIGHT: 3 WHITE LED, Vf = 3.2V (typ), If - 60mA (20mA/LED)
 2. LCM BRIGHTNESS : 450 cd/m2 (typ)
 3. DRIVER IC : ST7789V/ST7789H2
 4. DISPLAY TYPE: IPS
 5. OPERATING TEMPERATURE: -20°C TO +70°C
 6. STORAGE TEMPERATURE: -30°C TO +80°C
 7. IMPORTANT DIMENSION : REERENCE /REPEATED DIMENSION ()
 8. GENERAL TOLERANCE ±0.3

CRYSTAL CLEAR TECHNOLOGY SDN BHD 16, JLN TP5, TMN PERINDUSTRIAN SIME UEP, 47500 SUBANG JAYA, SELANGOR DARUL EHSAN.			PART NAME MECHANICAL DRAWING			
APPROVED	CHECKED	DRAWN HAFIZAH 05-11-2015	UNIT : MM NTS	DRAWING NUMBER T154A02N00	SHEET 1 / 1	REV. 1