

FREQUENCY RANGE	10 MHz to 240 MHz
FREQUENCY ACCURACY @ + 25 °C	$\pm 0.0015\%$ (± 15 PF
FREQUENCY STABILITY Vs. TEMPERATURE	See Options Below
OPERATING TEMPERATURE RANGE	See Options Below
INPUT VOLTAGE (See Note Below)	- 4.5 VDC $\pm 5\%$

INPUT CURRENT @ - 4.5 VDC	50 mA Max.
---------------------------	------------


OUTPUT	100K Compatible
LOAD	100 Ω to - 2.0 VDC
SYMMETRY	60/40% @ 50% Level
RISE & FALL TIMES (10% to 90% Level)	2 nS Max.

START-UP TIME	15 mS Max.
---------------	------------

FREQUENCY STABILITY Vs. VOLTAGE	$\pm 0.0002\%$ (± 2 PPM) Max. (for 5% change in Voltage)
---------------------------------	---

AGING @ +25 °C	$\pm 0.0005\%$ (± 5 PPM) / year Max.
----------------	--

PACKAGE, SEAL & LEAD FINISH	Conforms with the Requirements of MIL-PRF-55310
-----------------------------	--

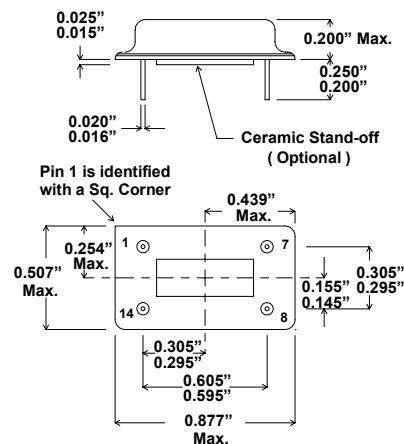


Pin Connections

14	GND/CASE
7	-4.5 VDC
8	OUTPUT
1	N/C
All Others	MISSING

NOTE: For PECL applications, Xsis 300 Series ECL oscillators can be operated with +5 VDC $\pm 10\%$ on Pin 14 and power supply return on Pin 7. The output logic levels will still be referenced to +5 VDC and the case will be at +5 VDC, however, 0.8 V peak to peak output signal can be AC or DC coupled as necessary.

Contact Xsis Engineering for special requirements such as, **Output Symmetry, Start-up Time, Frequency Accuracy, Complementary Outputs, Multiple Outputs, etc.**

ORDERING INFORMATION (Select from options below) :

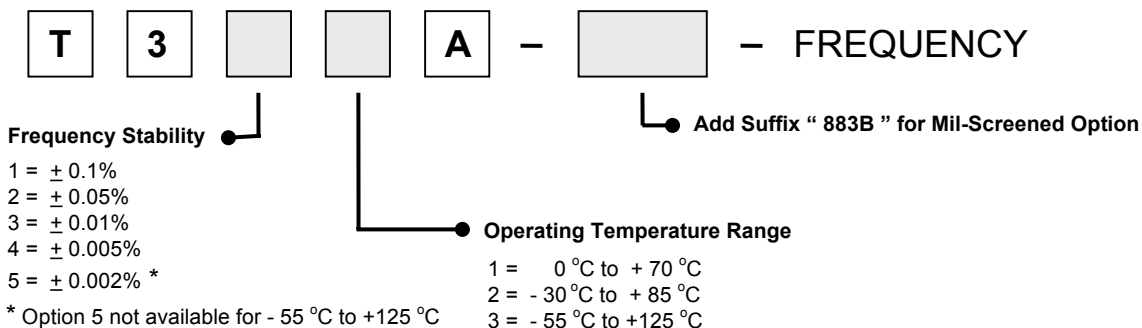

EXAMPLE: T343A - 883B - 24.000 MHz = 14 Pin Package, 100K ECL, $\pm 0.005\%$ over -55 °C to +125 °C, Mil-Screened , and 24.000 MHz