


# Surface Mount RF Transformer

## T9-1

50Ω 0.15 to 200 MHz



CASE STYLE: W38  
PRICE: \$3.95 ea. QTY (1-9)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

*The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.*

### Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

### Pin Connections

PRIMARY DOT	4
PRIMARY	6
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	—
NOT USED	2,5

### Features

- wideband, 0.15 to 200 MHz
- good return loss
- also available with plug-in (X65) surface mount gull-wing (KK81) leads

### Applications


- impedance matching
- VHF
- receivers/transmitters

### Transformer Electrical Specifications

Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
9	0.15-200	0.15-200	0.3-150	2-40

\* Insertion Loss is referenced to mid-band loss, 0.7 dB typ.

### Outline Drawing

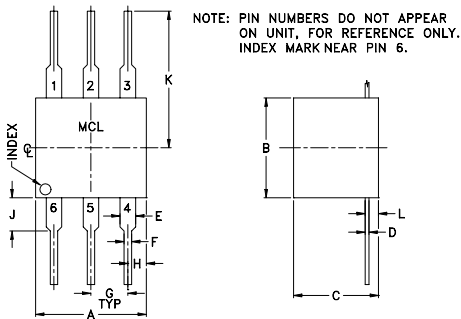

www.DataSheet4U.com

### Outline Dimensions (inch/mm)




A	B	C	D	E	F
.30	.27	.23	.010	.042	.020
7.62	6.86	5.84	0.25	1.07	0.51

G	H	J	K	L	wt
.100	.05	.09	.31	.036	grams
2.54	1.27	2.29	7.87	0.91	0.50

### Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
0.15	1.74	9.52
0.27	1.27	12.91
0.80	0.86	18.03
20.00	0.70	21.64
70.00	0.88	15.43
105.00	1.03	12.45
130.00	1.17	10.81
155.00	1.35	9.48
182.00	1.54	8.28
200.00	1.65	7.60

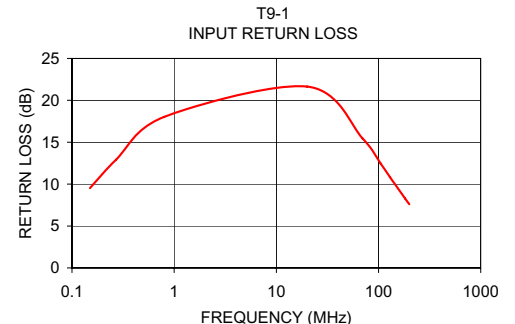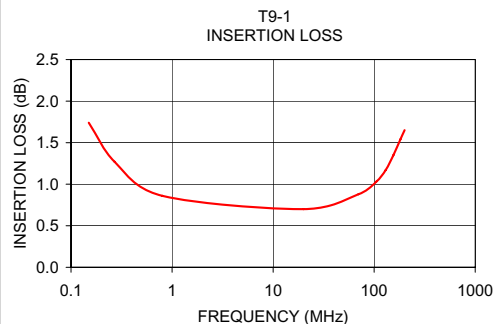

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

REV. A  
M98898  
T9-1  
IG/TD/CP  
070802