



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date:

Product Name: SAW Filter 836.5MHz SMD 3.0x3.0

TST Parts No.:TA0169A

Customer Parts No.:_____

Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Elvis Chiu

Approval by: _____ Francis Chen

Date: _____ 2004/03/23



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 836.5 MHz

MODEL NO.: TA0169A

REV. NO.:4

A. MAXIMUM RATING:

1. Input Power Level: 10 dB_m
2. DC voltage: 0 V
3. Operating Temperature: -30°C to +85°C
4. Storage Temperature: -40°C to +85°C



RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:

Item	Min.	Typical	Max.
Center frequency Fc (dB)	-	836.5	-
Insertion loss within 824 ~849 MHz IL (dB)	-	2.1	3.0
Amplitude ripple (p-p) within 824 ~ 849 MHz (dB)	-	1.2	2.0
Attenuation (Reference level from 0 dB)			
D.C. ~ 800 MHz (dB)	23.0	26.0	-
869 ~ 894 MHz (dB)	29.0	32.0	-
978 ~ 1006 MHz (dB)	25.0	28.0	-
1050 ~ 2500 MHz (dB)	15.0	18.0	-
VSWR within 824 ~849 MHz	-	1.8	2.3
Source impedance Zs (Ω)	-	50	-
Load impedance ZL (Ω)	-	50	-



Note1. No matching network required for operation at 50 Ω

C. Frequency Characteristics :

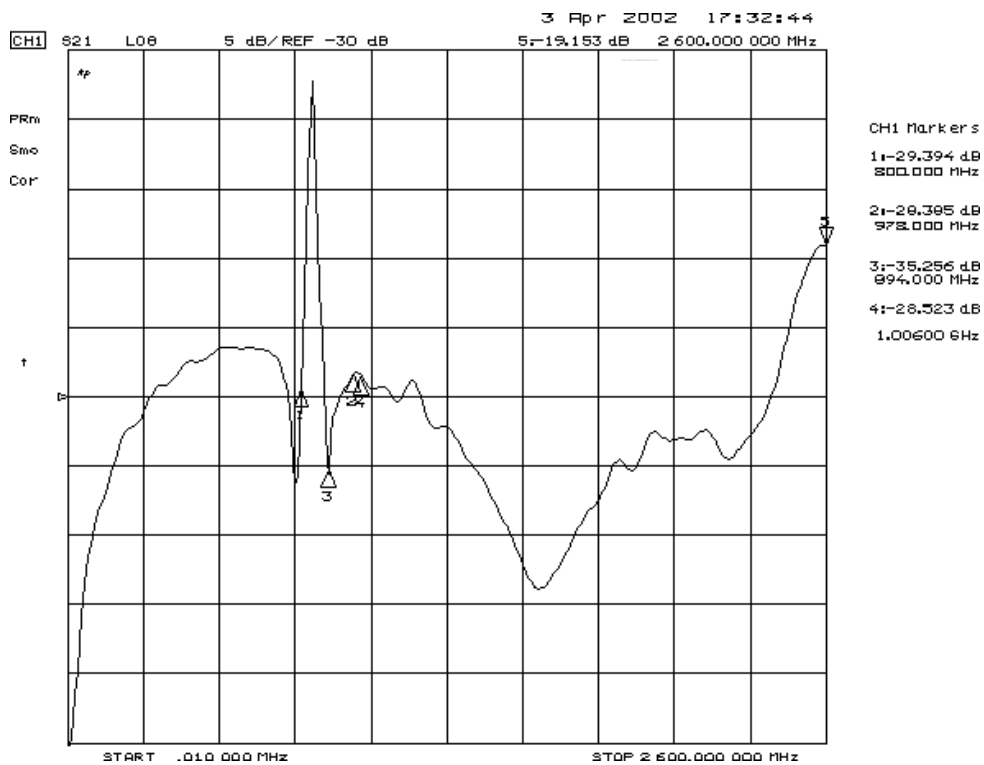
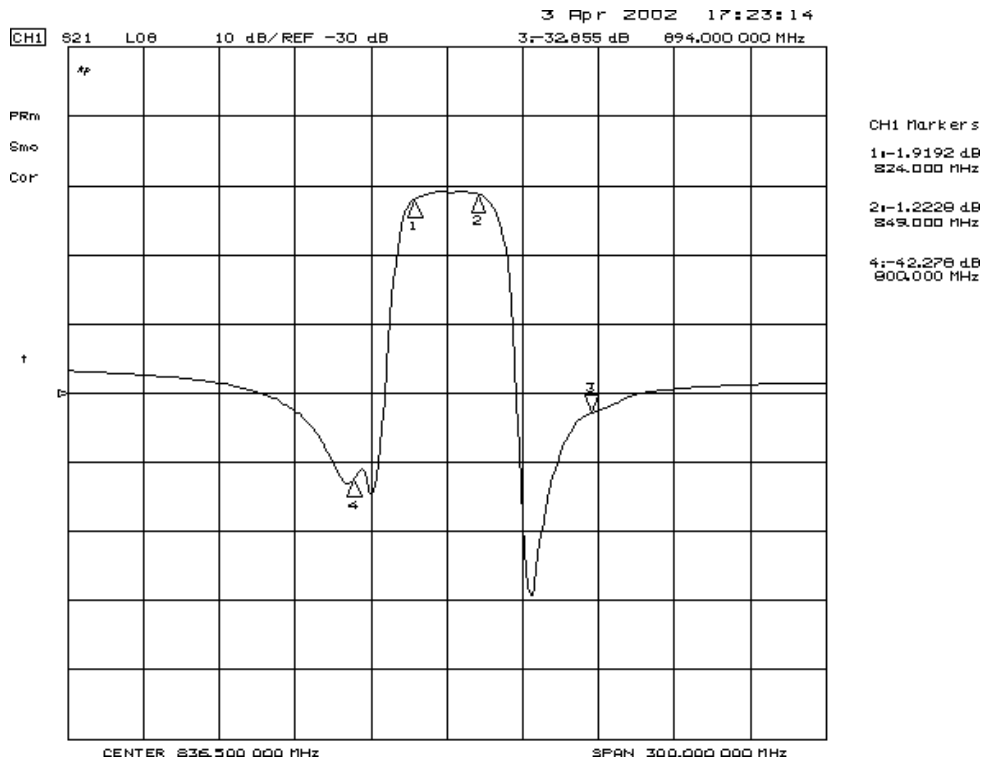


D.Reflections Functions :


S11:

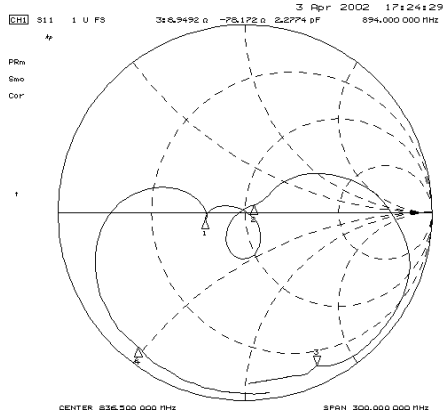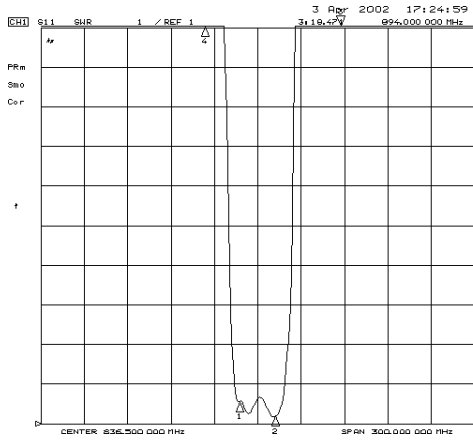


S22:

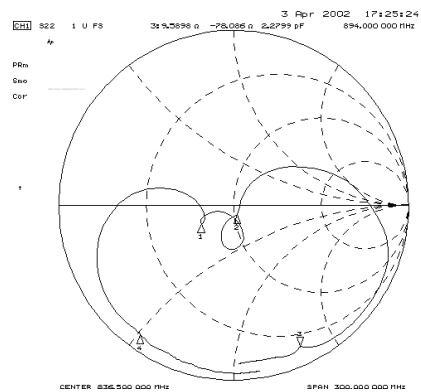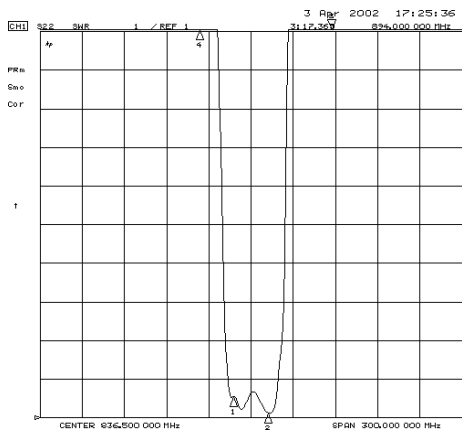

E. MEASUREMENT CIRCUIT:

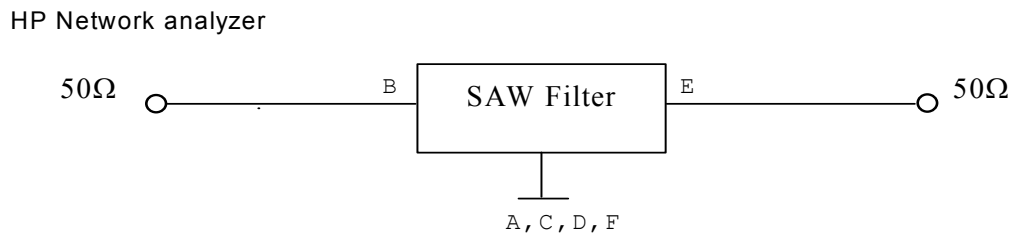

F. OUTLINE DRAWING:

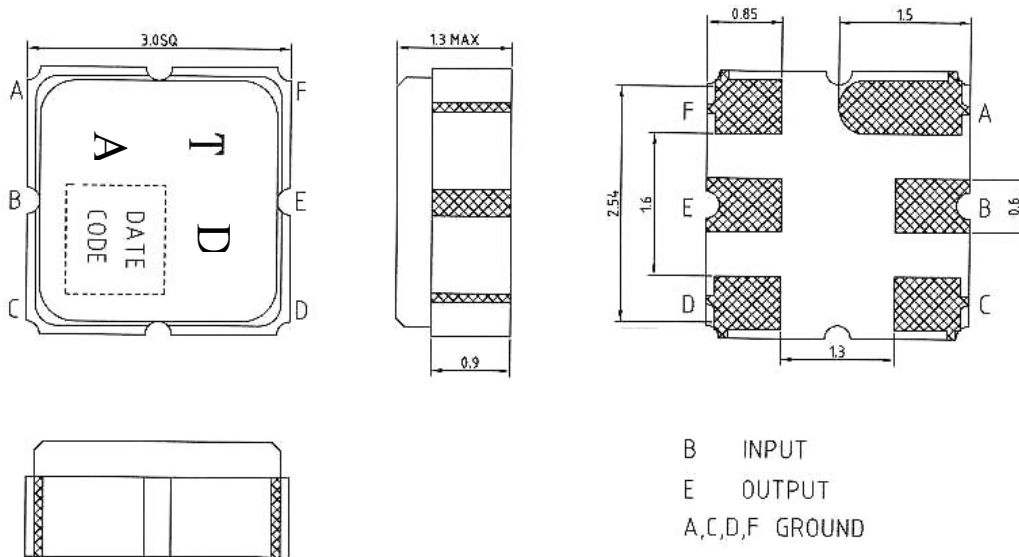

G. PCB Footprint:

