



# Topstek Current Transducer TA5A4V .. TA50A4V


## TA 5A~50A

### Features

- ◆ Highly reliable Hall Effect device
- ◆ Compact and light weight
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 50 kHz)
- ◆ Low power consumption (9 mA nominal)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulate, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

### Applications

- ◆ UPS systems
- ◆ Industrial robots
- ◆ NC tooling machines
- ◆ Elevator controllers
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Power supply for laser processing machines
- ◆ Controller for traction equipment e.g. electric trains
- ◆ Other automatic control systems

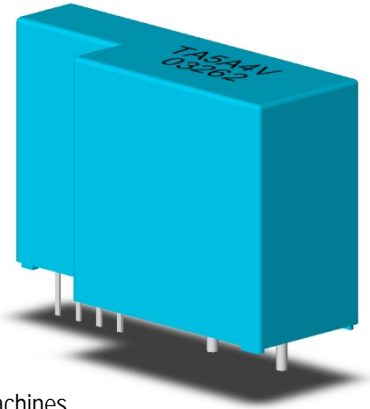

### Specifications



| Parameter                            | Symbol          | Unit           | TA 5A 4V  | TA 7.5A 4V | TA 10A 4V | TA 12.5A 4V | TA 15A 4V | TA 18.5A 4V | TA 20A 4V | TA 25A 4V | TA 37.5A 4V | TA 50A 4V |
|--------------------------------------|-----------------|----------------|---|------------|-----------|-------------|-----------|-------------|-----------|-----------|-------------|-----------|
| Nominal Input Current                | $I_{in}$        | A DC           | 5   | 7.5        | 10        | 12.5        | 15        | 18.5        | 20        | 25        | 37.5        | 50        |
| Linear Range                         | $I_{ls}$        | A DC           | ±15   | ±23        | ±30       | ±38         | ±45       | ±56         | ±60       | ±75       | ±112        | ±150      |
| Diameter of Primary Coil             | d               | mm             | 1   | 1          | 1.2       | 1.4         | 1.4       | 1.4         | 1.4       | 1.6       | 1.6x2.5     | 1.6x2.5   |
| Turns of Primary Coil                | T               | T              | 5   | 3          | 2         | 2           | 1         | 1           | 1         | 1         | 1           | 1         |
| Ampere-Turn of Primary Coil          | AT              | AT             | 25  | 22.5       | 20        | 25          | 15        | 18.5        | 20        | 25        | 37.5        | 50        |
| Nominal Output Voltage               | $V_{hn}$        | V              | 4 V ±1% at $I_f = I_{in}$ ( $R_L = 10k\Omega$ )     |            |           |             |           |             |           |           |             |           |
| Offset Voltage                       | $V_{os}$        | mV             | Within ±40 mV @ $I_f = 0$ , $T_a = 25^\circ C$      |            |           |             |           |             |           |           |             |           |
| Output Resistance                    | $R_{OUT}$       | $\Omega$       | < 100 $\Omega$ (50 $\Omega$ nominal)                |            |           |             |           |             |           |           |             |           |
| Hysteresis Error                     | $V_{oh}$        | mV             | Within ±15 mV @ $I_f = I_{in} \rightarrow 0$        |            |           |             |           |             |           |           |             |           |
| Supply Voltage                       | $V_{CC}/V_{EE}$ | V              | ±15V ±5%  |            |           |             |           |             |           |           |             |           |
| Linearity ( Within ± $I_{in}$ )      | $\rho$          | %              | Within ±1% of $I_{in}$                              |            |           |             |           |             |           |           |             |           |
| Consumption Current                  | $I_{CC}$        | mA             | ±9 mA nominal                                       |            |           |             |           |             |           |           |             |           |
| Response Time (90% $V_{hn}$ )        | $T_r$           | $\mu sec$      | 13 $\mu sec$ max. @ $d I_f / dt = I_{in} / \mu sec$ |            |           |             |           |             |           |           |             |           |
| Thermal Drift of Output              | -               | %/ $^\circ C$  | Within ±0.1 %/ $^\circ C$ @ $I_{in}$                |            |           |             |           |             |           |           |             |           |
| Thermal Drift of Zero Current Offset | -               | mV/ $^\circ C$ | Within ±3 mV/ $^\circ C$ @ $I_{in}$                 |            |           |             |           |             |           |           |             |           |
| Dielectric Strength                  | -               | V              | AC2.5KV X 60 sec                                    |            |           |             |           |             |           |           |             |           |
| Isolation Resistance @ 1000 VDC      | $R_{IS}$        | M $\Omega$     | >1000 M $\Omega$                                    |            |           |             |           |             |           |           |             |           |
| Operating Temperature                | $T_a$           | $^\circ C$     | -15 $^\circ C$ to 80 $^\circ C$                     |            |           |             |           |             |           |           |             |           |
| Storage Temperature                  | $T_s$           | $^\circ C$     | -20 $^\circ C$ to 85 $^\circ C$                     |            |           |             |           |             |           |           |             |           |
| Mass                                 | W               | g              | 14 g  |            |           |             |           |             |           |           |             |           |




# Topstek Current Transducer TA5A4V .. TA50A4V

## Appearance, dimensions and pin identification for 5A to 25A models


All dimensions in mm  $\pm 0.5$ , holes  $-0, +0.2$  except otherwise noted

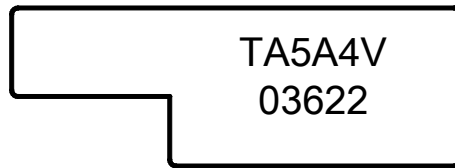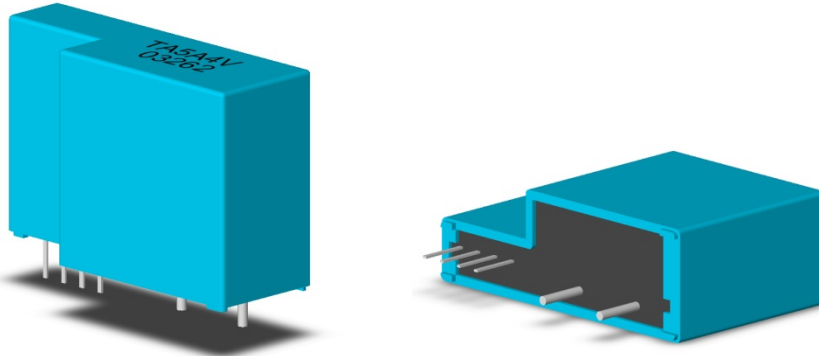

Model number and date code marking

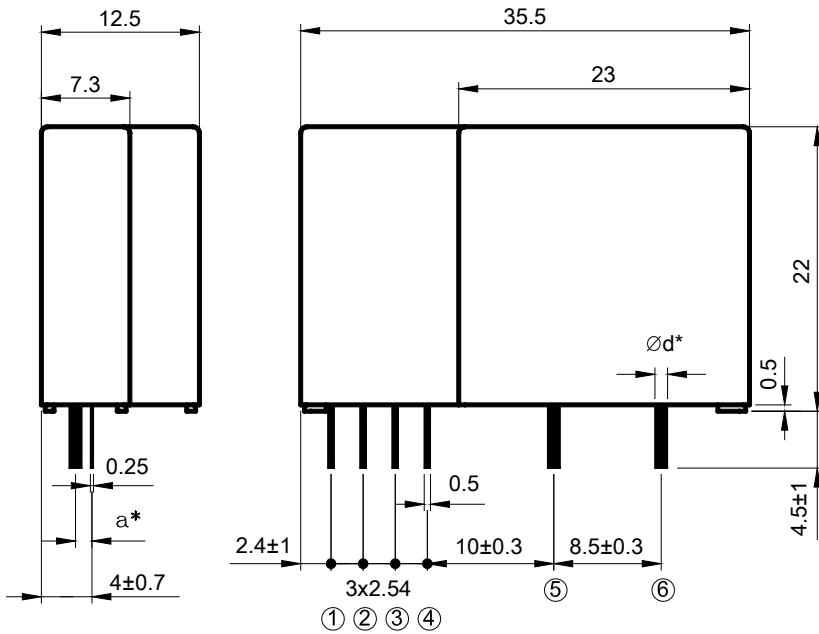

| Pin Assignment |                  |
|----------------|------------------|
| ①              | +15V             |
| ②              | -15V             |
| ③              | V <sub>OUT</sub> |
| ④              | 0V               |
| ⑤              | I+               |
| ⑥              | I-               |

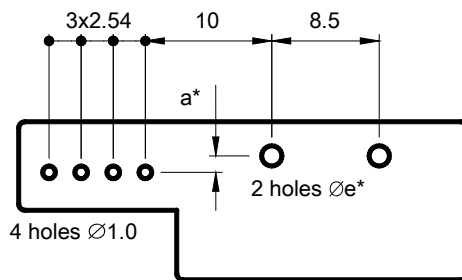

5A to 25A PCB mounting hole layout

| Part Number | a* (mm) | d* (mm) | e* (mm) |
|-------------|---------|---------|---------|
| TA5A4V      | 1.3     | Ø1.0    | Ø1.6    |
| TA7.5A4V    | 1.3     | Ø1.0    | Ø1.6    |
| TA10A4V     | 1.4     | Ø1.2    | Ø1.8    |
| TA12.5A4V   | 1.5     | Ø1.4    | Ø2.0    |
| TA15A4V     | 1.5     | Ø1.4    | Ø2.0    |
| TA18.5A4V   | 1.5     | Ø1.4    | Ø2.0    |
| TA20A4V     | 1.5     | Ø1.4    | Ø2.0    |
| TA25A4V     | 1.6     | Ø1.6    | Ø2.2    |








# Topstek Current Transducer TA5A4V .. TA50A4V

## Appearance, dimensions and pin identification for 37.5A to 50A models


All dimensions in mm  $\pm 0.5$ , holes  $-0, +0.2$  except otherwise noted

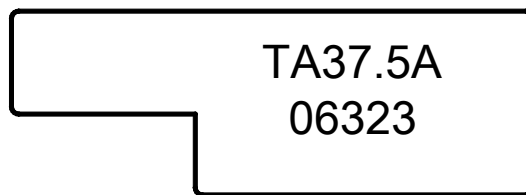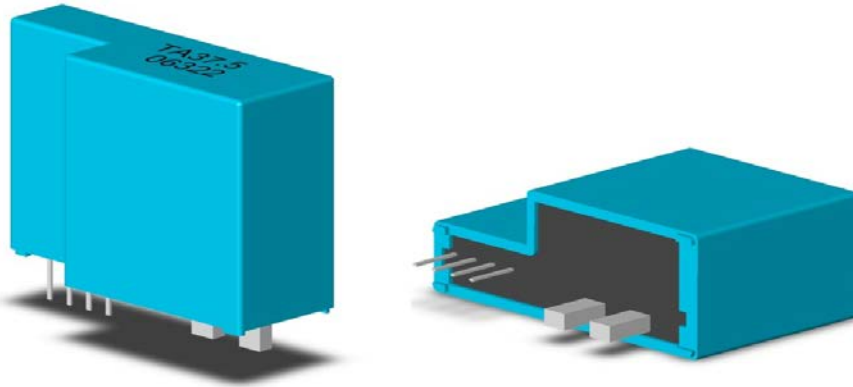

Model number and date code marking

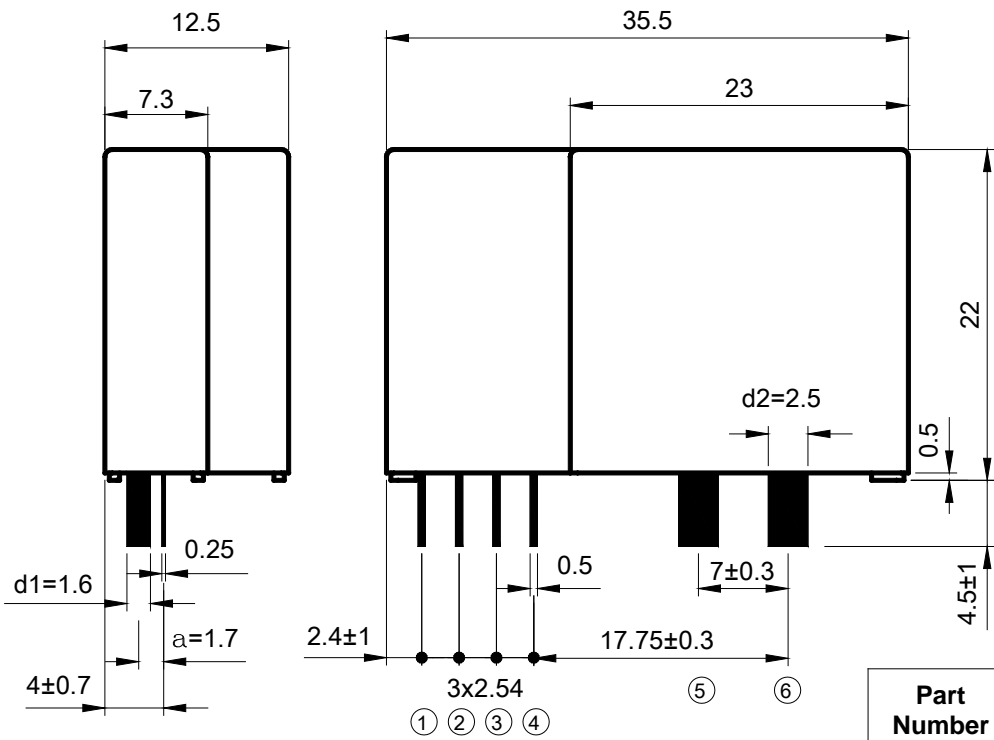

| Pin Assignment |                  |
|----------------|------------------|
| ①              | +15V             |
| ②              | -15V             |
| ③              | V <sub>OUT</sub> |
| ④              | 0V               |
| ⑤              | I <sub>+</sub>   |
| ⑥              | I <sub>-</sub>   |

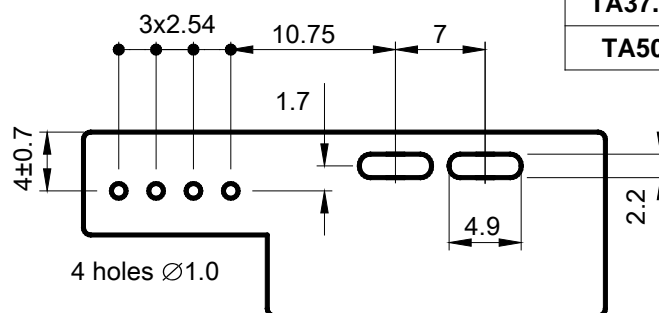

| Part Number | a* (mm) | d1xd2 (mm) | hole (mm) |
|-------------|---------|------------|-----------|
| TA37.5A     | 1.7     | □1.6x2.5   | □2.2x4.9  |
| TA50A       | 1.7     | □1.6x2.5   | □2.2x4.9  |

TA37.5A..TA50A PCB mounting hole layout








# Topstek Current Transducer TA5A4V .. TA50A4V

## Appearance, dimensions and pin identification for TA37.5A-P .. TA50A-P models


All dimensions in mm  $\pm 0.3$ , holes  $-0, +0.2$  except otherwise noted

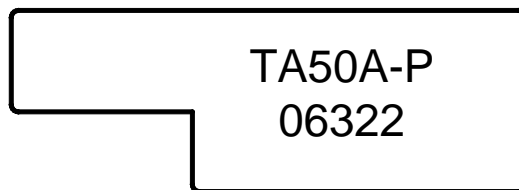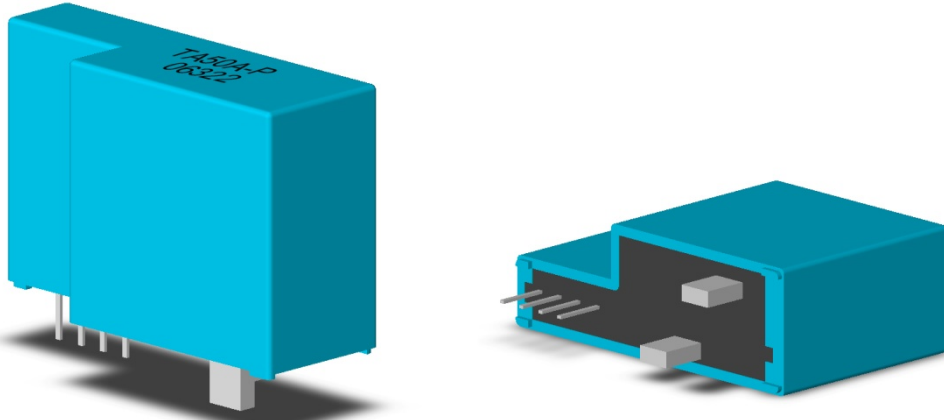

Model number and date code marking

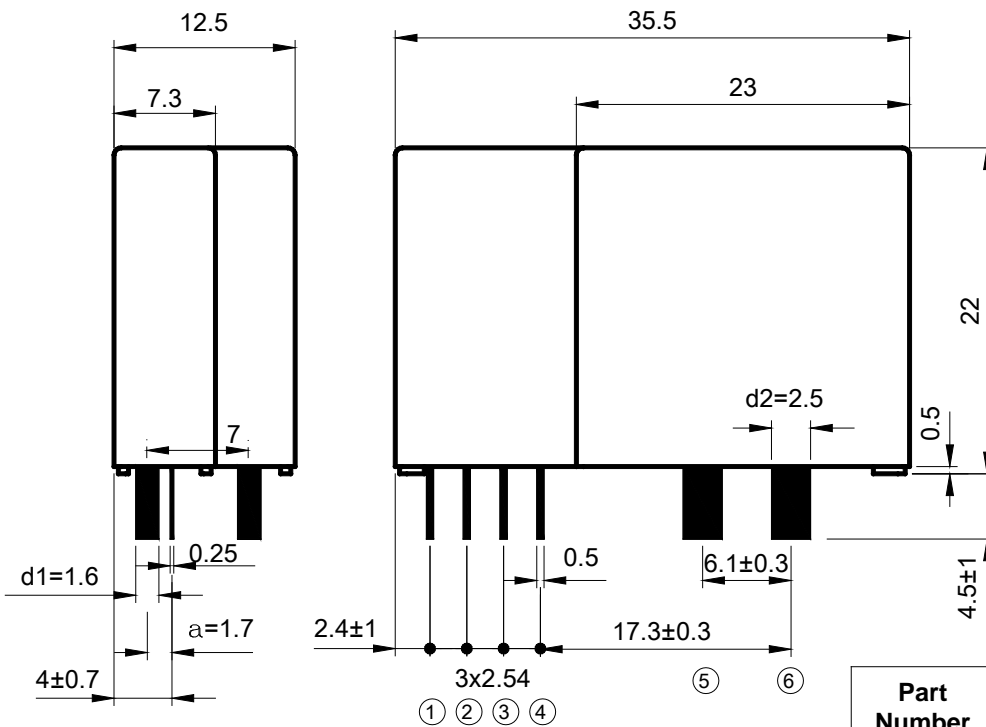

| Pin Assignment |                  |
|----------------|------------------|
| ①              | +15V             |
| ②              | -15V             |
| ③              | V <sub>OUT</sub> |
| ④              | 0V               |
| ⑤              | I+               |
| ⑥              | I-               |

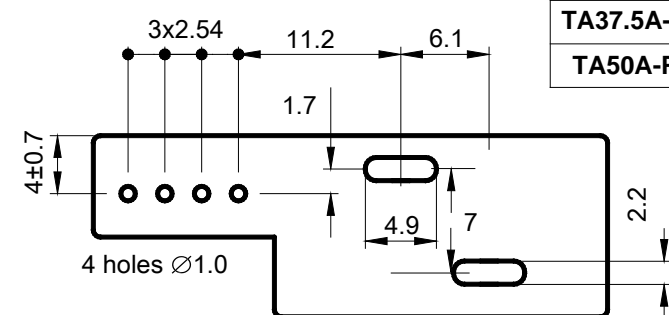

| Part Number | a* (mm) | d1xd2 (mm) | hole (mm) |
|-------------|---------|------------|-----------|
| TA37.5A-P   | 1.7     | □1.6x2.5   | □2.2x4.9  |
| TA50A-P     | 1.7     | □1.6x2.5   | □2.2x4.9  |

TA37.5A-P..TA50A-P PCB mounting hole layout

