

TAA121

Current Transformer with Split Core

designed for Busbar 120x80mm / Cable \varnothing 80mm




TECHNICAL DATA

break-proof plastic housing with
integrated terminal cover
self-extinguishing
insulation
protection
frequency
current limiting factor
thermal short-term current
dynamic short-term current
storage temperature
operating temperature
weight

UL94-V0
class E
IP 20
50..60Hz
FS 5
 $I_{th}=60I_n$
 $I_{dyn}=2,5 \times I_{th}$
-20..+80°C
-5..+50°C
1,30..1,50kg

Order Code	sec. 5A primary	burden class 0,5	burden class 1,0
TAA121800X05	800A	3VA	6VA
TAA1211K0X05	1000A	4VA	8VA
TAA1211K2X05	1200A	5VA	10VA
TAA1211K5X05	1500A	7,5VA	10VA

Order Code	sec. 1A primary	burden class 0,5	burden class 1,0
TAA121800X01	800A	3VA	6VA
TAA1211K0X01	1000A	4VA	8VA
TAA1211K2X01	1200A	5VA	10VA
TAA1211K5X01	1500A	7,5VA	10VA

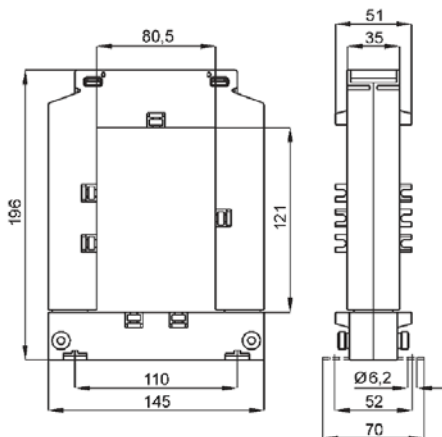

Langer
MESSTECHNIK

Soyerhofstrasse 16
D-81547 Muenchen
Germany

☎ +49-700-LANGER-01
☎ +49-89 - 69 99 86 78
Fax +49-89 - 69 99 86 79

eMail & Internet:
info@Langer-Messtechnik.de
www.Langer-Messtechnik.de