




Topstek Current Transducer TB5A .. 50A 2V-S12

TB 5A..50A-2V-S12

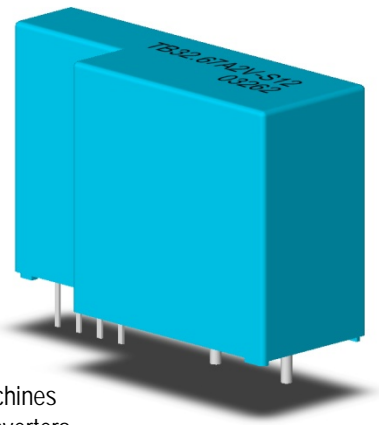

Features

- ◆ Highly reliable Hall Effect device
- ◆ Compact and light weight
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 50 kHz)
- ◆ Low power consumption (12 mA nominal)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulate, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

Applications

- ◆ UPS systems
- ◆ Industrial robots
- ◆ NC tooling machines
- ◆ Elevator controllers
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Power supply for laser processing machines
- ◆ Controller for traction equipment e.g. electric trains
- ◆ Other automatic control systems

Specifications



Parameter	Symbol	Unit	TB14.52A2V-S12	TB21.78A2V-S12	TB32.67A2V-S12
Nominal Input Current	I_{fn}	A DC	± 14.52	± 21.78	± 32.67
Linear Range	I_{fs}	A DC	± 15.98	± 23.96	± 35.94
Diameter of Primary Coil	d	mm	0.8	1.0	1.2
Turns of Primary Coil	T	T	6	4	3
Saturation Current	I_s	A DC	0~ ± 15.98	0~ ± 23.96	0~ ± 35.94
Output Voltage @ ($R_L=10k\Omega$, $T_a=25^\circ C$)	$I_f = I_{fn}$	V_{hn+}	V	$V_{hn0} + 2.0 V \pm 40mV$	
	$I_f = 0$	V_{hn0}	V	$2.5 V \pm 40 mV$	
	$I_f = -I_{fn}$	V_{hn-}	V	$V_{hn0} - 2.0 V \pm 40mV$	
Offset Voltage	V_{os}	mV	Within $2.5V \pm 40 mV$ @ $I_f=0$, $T_a=25^\circ C$		
Output Resistance	R_{OUT}	Ω	< 100Ω (50Ω nominal)		
Hysteresis Error	V_{oh}	mV	Within $\pm 20 mV$ @ $I_f=I_{fn} \rightarrow 0$		
Supply Voltage	V_{CC}	V	$+12V \pm 5\%$		
Linearity (Within $\pm I_{fn}$)	ρ	%	Within $\pm 1\%$ of I_{fn}		
Consumption Current	I_{CC}	mA	12 mA nominal		
Response Time (90% V_{hn})	T_r	μsec	3 μsec max. @ $dI_f/dt = I_{fn}/\mu sec$		
Thermal Drift of Output	-	%/ $^\circ C$	Within $\pm 0.1 \%$ / $^\circ C$ @ I_{fn}		
Thermal Drift of Zero Current Offset	-	mV/ $^\circ C$	Within $\pm 2 mV$ / $^\circ C$ @ I_{fn}		
Dielectric Strength	-	V	AC2.5KV X 60 sec		
Isolation Resistance	R_{IS}	M Ω	>1000 M Ω @ 1000 VDC		
Operating Temperature	T_a	$^\circ C$	-15 $^\circ C$ to 80 $^\circ C$		
Storage Temperature	T_s	$^\circ C$	-20 $^\circ C$ to 85 $^\circ C$		
Mass	W	g	14 g		




Topstek Current Transducer TB5A .. 50A 2V-S12

Appearance, dimensions and pin identification


All dimensions in mm ± 0.5 , holes $-0, +0.2$ except otherwise noted

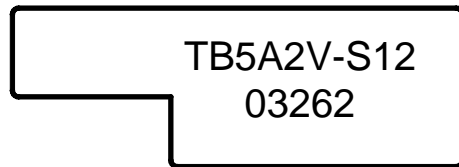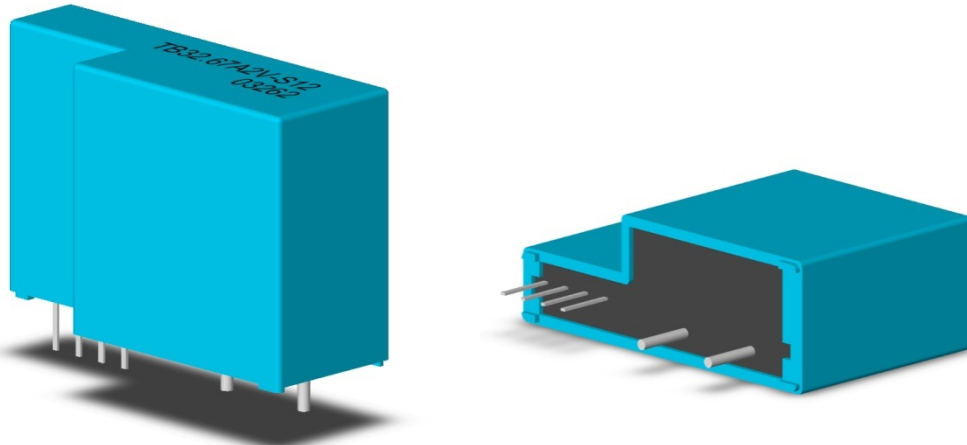

Model number and date code marking

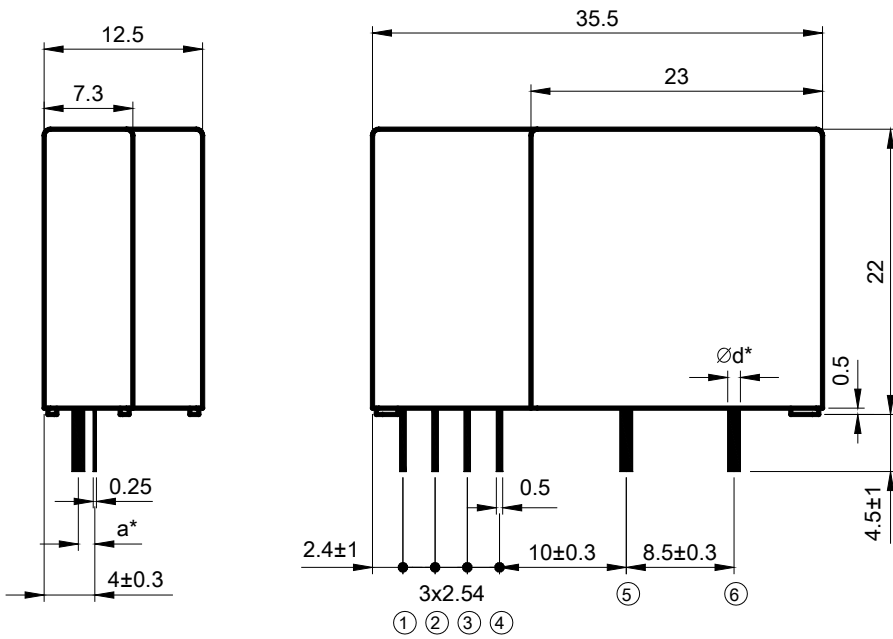

Pin Assignment	
①	0V
②	0V
③	+12V
④	V _{OUT}
⑤	I+
⑥	I-

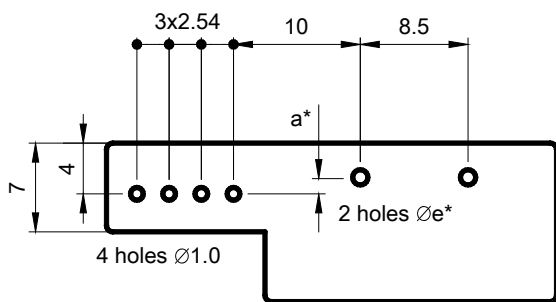

5A to 50A PCB mounting hole layout

Part Number	a* (mm)	d* (mm)	e* (mm)
TB10A2V	1.2	∅0.8	∅1.4
TB15.A2V	1.2	∅0.8	∅1.6
TB18A2V	1.3	∅1.0	∅1.8
TB22.5A2V	1.3	∅1.0	∅1.8
TB25A2V	1.4	∅1.2	∅1.8
TB33.0A2V	1.4	∅1.2	∅1.8
TB35A2V	1.5	∅1.4	∅2.0
TB50A2V	1.5	∅1.4	∅2.0

