



# TB1S-08~TB10S-08

## MICRO SURFACE MOUNT GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER

**VOLTAGE** 100~1000 Volts **CURRENT** 0.8 Amperes

**MICRO DIP / TDI**

Unit : inch(mm)




Recognized File #E139973

### FEATURES

- Glass passivated chip junction
- Ideally Suited for Automatic Assembly
- Save space on printed circuit boards
- Body Thick Very Thin <1.5mm
- Low Forward Voltage Drop
- Surge Overload Rating to 20A peak
- In compliance with EU RoHS 2002/95/EC directives
- Plastic Material:UL Flammability Classification Rating 94V-0

### MECHANICAL DATA

- Case : TDI, Plastic
- Terminals : Solderable per MIL-STD-750, Method 2026
- Polarity: As Marked on case
- Marking: Type number
- Weight: 0.003 ounces, 0.090 grams (Approx.)

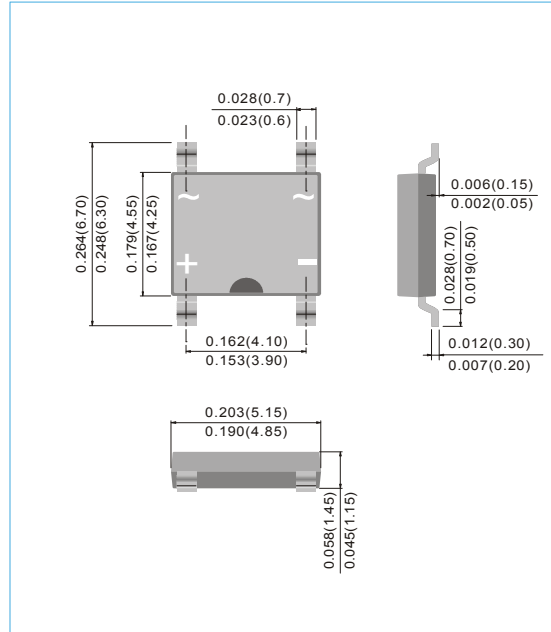

### ABSOLUTE MAXIMUM RATINGS (If not specified $T_A=25^\circ\text{C}$ )

PARAMETER	SYMBOL	CONDITIONS	TB1S-08	TB2S-08	TB4S-08	TB6S-08	TB8S-08	TB10S-08	UNIT
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	-	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	-	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	-	100	200	400	600	800	1000	V
Average Rectified Forward Current	$I_O$	60Hz sine wave, R-load, $T_A=25^\circ\text{C}$ On FR-4 P.C.B Board	0.8						A
Peak Surge Forward Current	$I_{FSM}$	60Hz sine wave, Non-repetitive 1 cycle peak value, $T_J=25^\circ\text{C}$	20						A
$I^2t$ Rating for fusing ( $t < 8.3\text{ms}$ )	$I^2t$	-	1.66						$\text{A}^2\text{S}$
Operating Junction Temperature	$T_J$	-	150						$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-	-55 to +150						$^\circ\text{C}$



# TB1S-08~TB10S-08

## ELECTRICAL CHARACTERISTICS (If not specified $T_A=25^\circ\text{C}$ )

PARAMETER	SYMBOL	CONDITIONS	MAX.	UNIT
Forward Voltage	$V_F$	$I_F=0.8\text{A}$ , Pulse measurement, Rating of per diode	1	V
Reverse Current	$I_R$	At $V_{RRM}$ , Pulse measurement, Rating of per diode	10	$\mu\text{A}$
Typical Junction capacitance	$C_J$	$V_R=4\text{V}$ , $f=1\text{MHz}$	10	pF
Thermal Resistance	$R_{\theta JC}$	Junction to case	70	$^\circ\text{C}/\text{W}$
	$R_{\theta JA}$	Junction to ambient, On FR-4 P.C.B Board	95	

### RATING AND CHARACTERISTIC CURVES

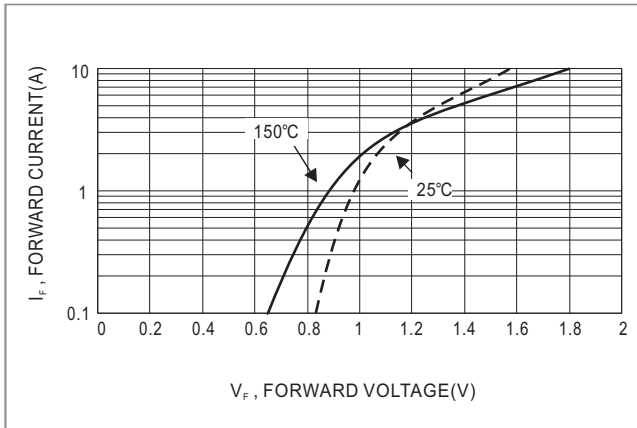


Fig.1 -TYPICAL FORWARD CHARACTERISTICS

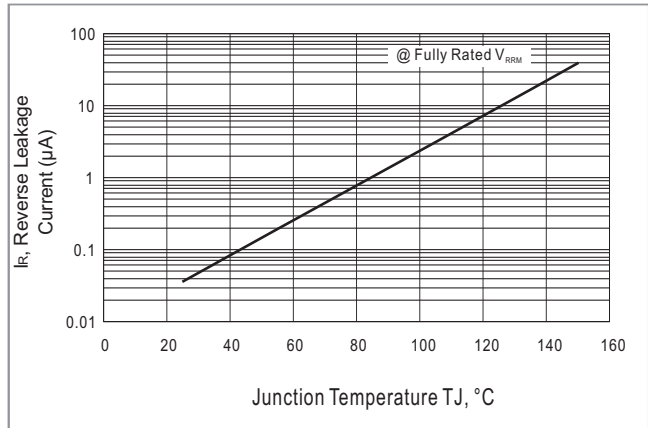


FIG-2 TYPICAL LEAKAGE CURRENT vs JUNCTION TEMPERATURE


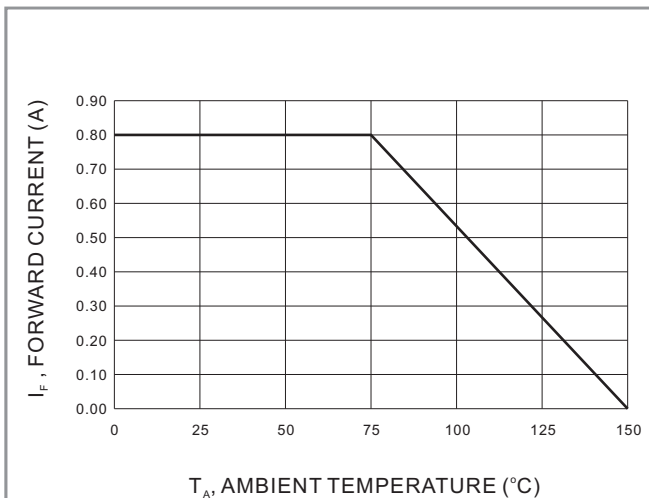


FIG 3- DERATING CURVE



# TB1S-08~TB10S-08

## MOUNTING PAD LAYOUT

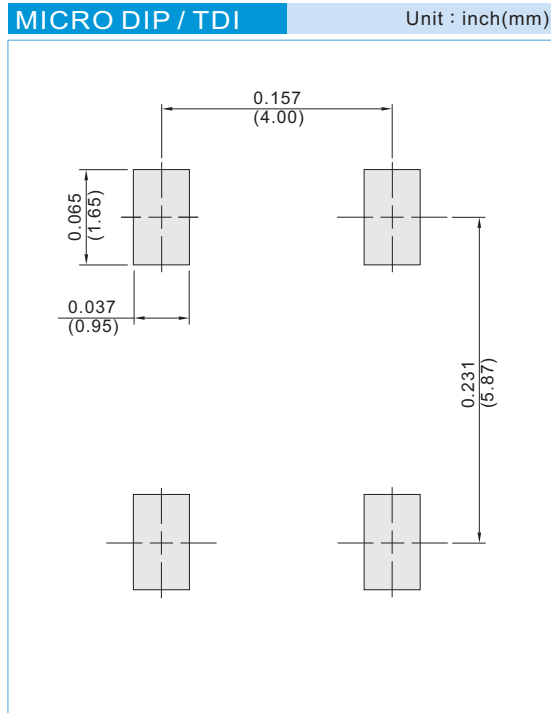

## ORDER INFORMATION

- Packing information
  - T/R - 4K per 13" plastic Reel
  - T/R - 1K per 7" plastic Reel

## LEGAL STATEMENT

### Copyright PanJit International, Inc 2011

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.