




TC1602D

16CharsX2 Lines
1/16 Duty, 1/5Bias

External Dimension

<http://www.oppod.com>

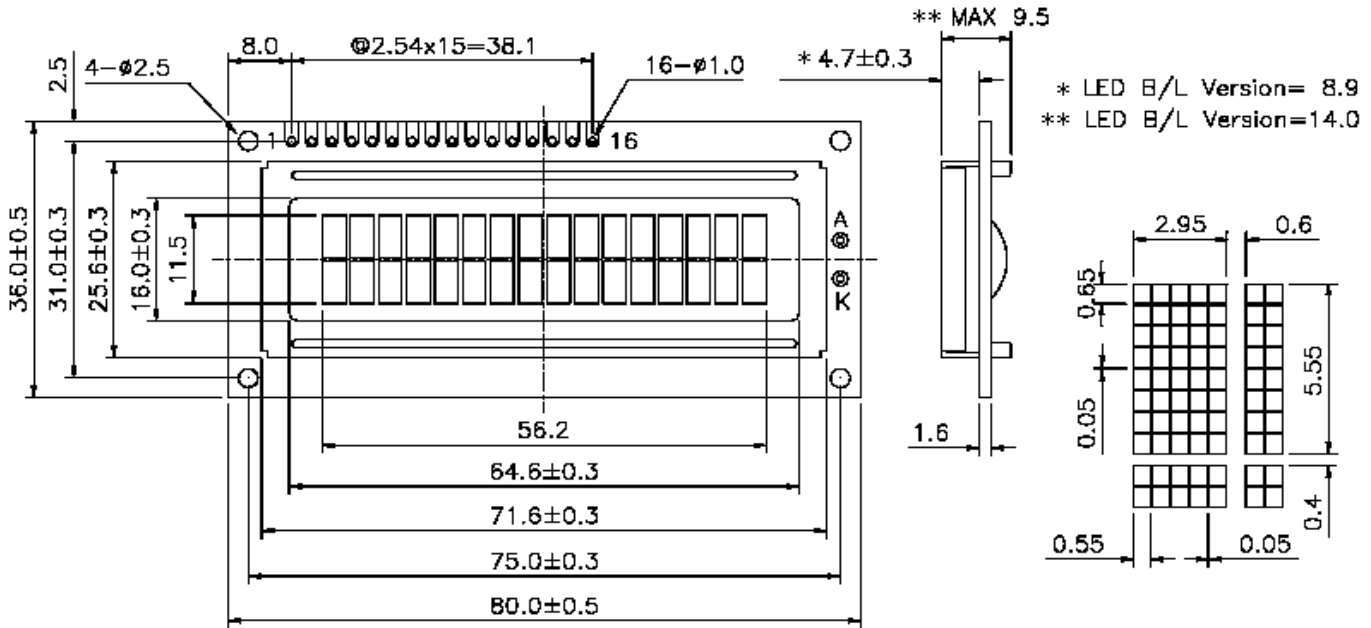

Mechanical Data

Item	Standard Value	Unit
Module size (W*H*T)	80.0*36.0*9.5/14.0	mm
View area (W*H)	64.6*16.0	mm
Active area (W*H)	56.2*11.5	mm
Dot size (W*H)	0.55*0.65	mm

Maximum Absolute Ratings

Item	Symbol	Value	Unit
Supply logic Volt.	V _{DD} -V _{SS}	-0.3 ~ +7.0	V
LCD driving Volt.	V _{DD} -V _O	-0.3 -13.0	V
Input Volt.	V _{in}	-0.3~ V _{DD} +0.3	V
Operating temp.	T _{OPR}	-20 ~ +70	
Storage temp.	T _{STG}	-30 ~ +80	

Electrical Characteristics (V_{DD} = 4.5V~5.5V)

Item	Symbol	Condition	Value	Unit
Supply logic Volt.	V _{DD}	---	5.0±0.5	V
Operating current	I _{DD}	V _{DD} =5.0V	1.2~3.0	mA
Input high volt.	V _{IH}	---	2.2~ V _{DD}	V
Input low volt.	V _{IL}	---	-0.3~0.6	V
Output high volt.	V _{oH}	I _{oH} =-0.2mA	2.4~ V _{DD}	V
Output low volt.	V _{oL}	I _{oL} =1.2mA	0~0.4	V
LCD driving volt.	V _{LCD}	T _A =25	4.6(Typ)	V

LED Backlight Characteristics (T_A=25)

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Volt.	V _f	---	---	4.1	4.3	V
Led Current	I _f	T _A =25	---	120	---	mA
Power Dissipation	P _d	---	---	500	---	mW

Interface Description

PIN	Symbol	Level	Description
1	V _{SS}	0V	Ground
2	V _{DD}	5.0V	Power supply for Logic
3	V _O	Variable	Driving voltage for LCD
4	RS	H/L	H:Data L:Instruction
5	RW	H/L	H:Read L:Write
6	E	H/L	Enable
7	DB0	H/L	In 8-bit mode, used as low order data bus. In 4-bit bus mode open these pins.
8	DB1	H/L	
9	DB2	H/L	
10	DB3	H/L	
11	DB4	H/L	In 8-bit mode, used as high data bus. In 4-bit mode, used as both high and low order. DB7 is used for Busy Flag .
12	DB5	H/L	
13	DB6	H/L	
14	DB7	H/L	
15	A	+5V	Anode of LED Backlight
16	K	0V	Cathode of LED Backlight

Block Diagram

