
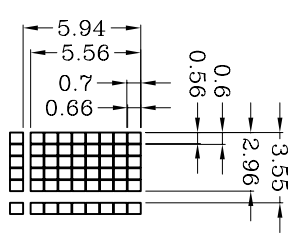


VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2014-03-21

TYPE	A	B
LED B/L	10.6	6.5

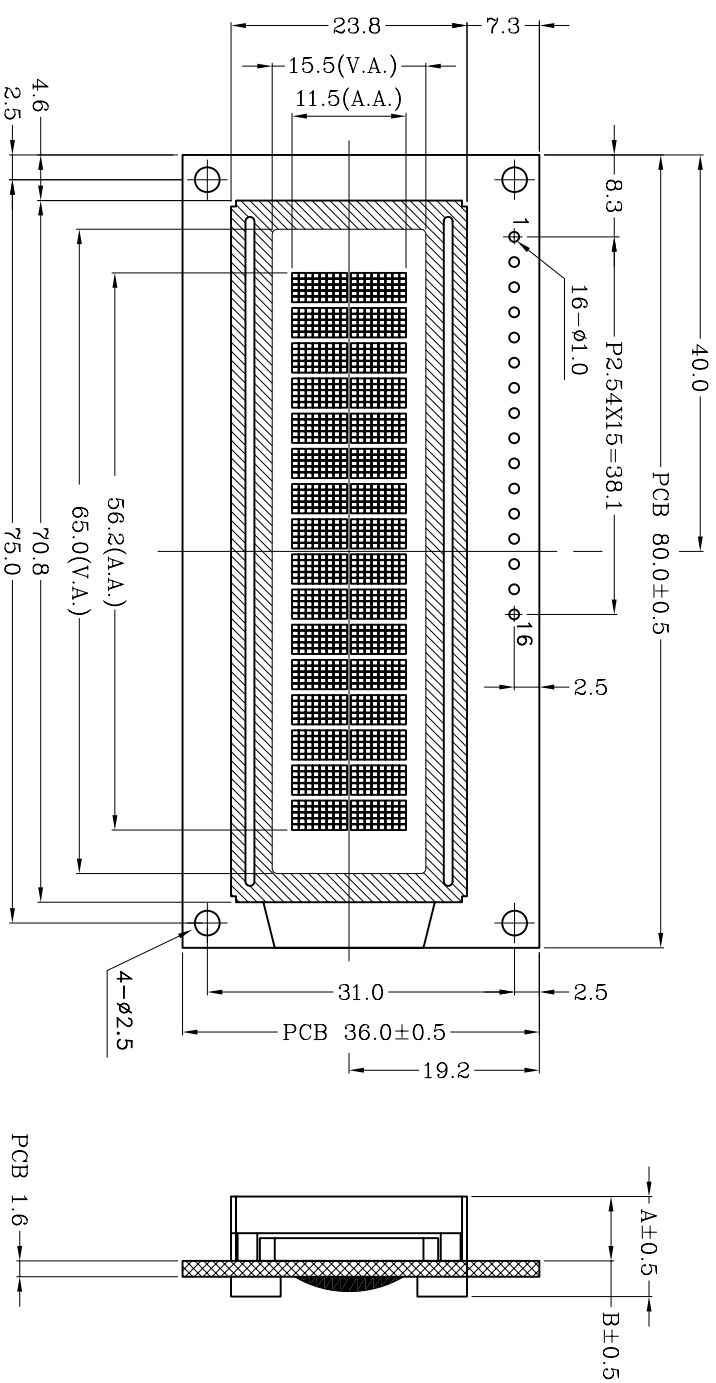

DETAIL DOTS  
SCALE 2:1

VIEWING →

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

SPECIFICATIONS

1. DISPLAY TYPE: FSTN/TRANSLECTIVE/POSITIVE/B-W/ANTI UV
2. LCD DRIVING VOLTAGE: 4.7V
3. LOGIC VOLTAGE: 5.0V
4. VIEWING DIRECTION: 6 O'CLOCK
5. OPERATING TEMP: -20° C-70° C
6. STORAGE TEMP: -30° C-80° C
7. DRIVE MODE: 1/16 DUTY, 1/5 BIAS
8. BACKLIGHT: BLUE/SIDE BACKLIGHT/5.0V
9. OTHER:

NOTE:

MECHANICAL TOL.±0.3 UNLESS SPECIFIED

DESCRIPTION:

C/D

SCALE: FIT  
SHEET: 1 OF 1  
PROJECTION  
UNIT: mm

TINSHARP INDUSTRIAL CO.,LTD.  
MODEL TC1602T-04A  
SERIAL NUMBER ZMQ0171

APP:	CHK:	DWN:
DATE:	DATE:	DATE: