



VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2012-07-09

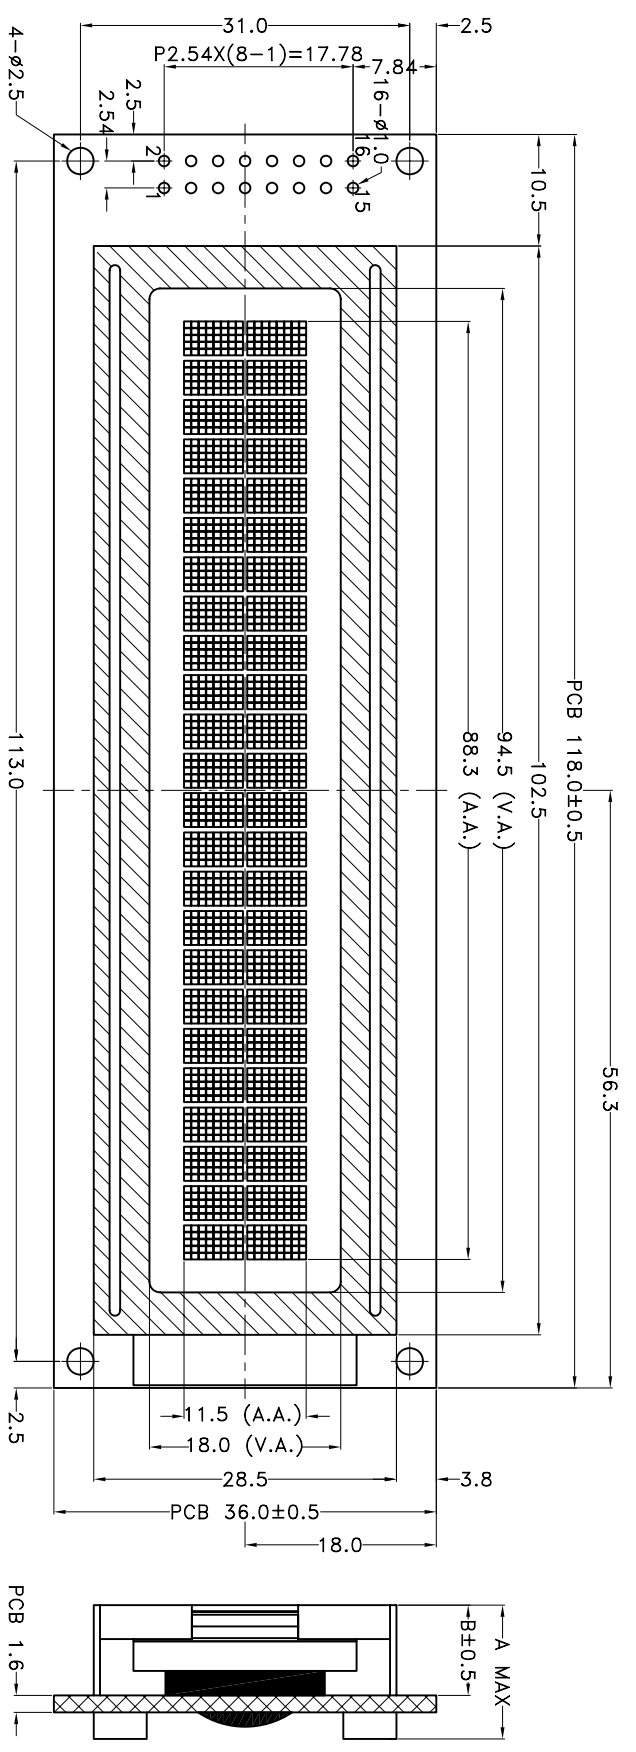

DETAIL DOTS
SCALE: 2:1



TYPE	A	B
LED B/L	13.1	8.5

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

SPECIFICATIONS

1. DISPLAY TYPE: STN/TRANSMISSIVE/NEGATIVE/BLUE
2. LCD DRIVING VOLTAGE: 4.6V
3. LOGIC VOLTAGE: 5.0V
4. VIEWING DIRECTION: 6 O'CLOCK
5. OPERATING TEMP: -20° C~70° C
6. STORAGE TEMP: -30° C~80° C
7. DRIVE MODE: 1/16 DUTY, 1/4 BIAS
8. BACKLIGHT: WHITE/SIDE BACKLIGHT/5.0V
9. OTHER:

NOTE:

MECHANICAL TOL.±0.3 UNLESS SPECIFIED

DESCRIPTION:

C/D

SCALE: FIT	TINSHARP	TINSHARP
SHEET: 1 OF 1	INDUSTRIAL CO.,LTD.	INDUSTRIAL CO.,LTD.
UNIT: mm	MODEL	SERIAL NUMBER
PROJECTION	TC2402A-01A	LX1510
APP:	CHK:	DWN:
DATE:	DATE:	DATE: