


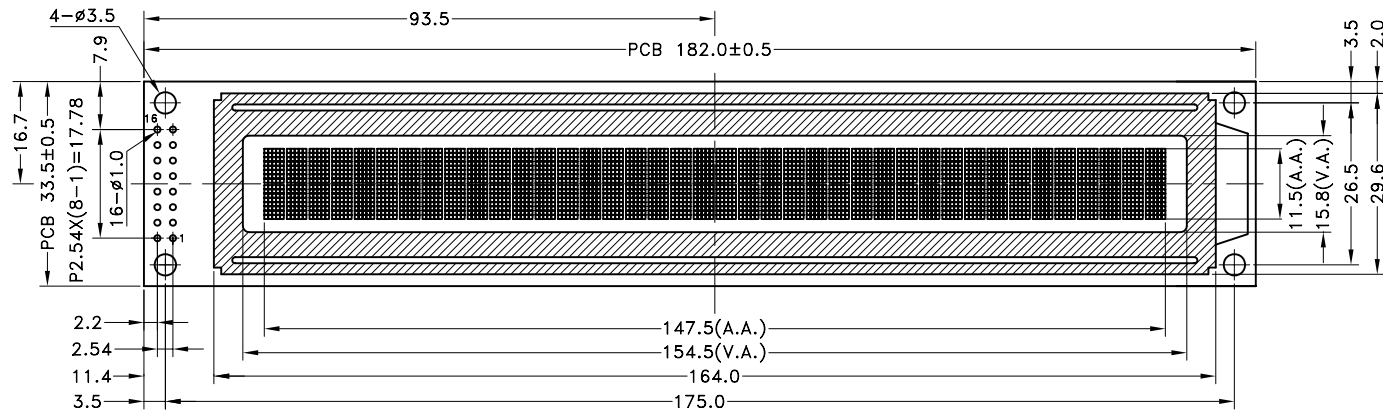


VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2006-11-07
V01	修改模块特性	2009-07-29
V02	修改模块特性	2012-04-10



TYPE	A	B
LED B/L	12.5	6.9

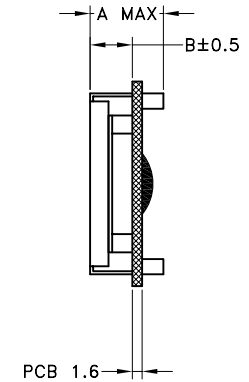

DETAIL DOTS
SCALE 3:1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

SPECIFICATIONS

1. DISPLAY TYPE: STN/TRANSMISSIVE/NEGATIVE/BLUE
 2. LCD DRIVING VOLTAGE: 4.1V
 3. LOGIC VOLTAGE: 5.0V
 4. VIEWING DIRECTION: 6 O'CLOCK
 5. OPERATING TEMP: -1 0° C~60° C
 6. STORAGE TEMP: -2 0° C~70° C
 7. DRIVE MODE: 1/16 DUTY,1/5 BIAS
 8. BACKLIGHT: WHITE/SIDE BACKLIGHT/5.0V
 9. OTHER:
- MECHANICAL TOL.±0.3 UNLESS SPECIFIED

NOTE:

DESCRIPTION:


C/D

SCALE: FIT

SHEET: 1 OF 1



TINSHARP
INDUSTRIAL CO.,LTD.



PROJECTION

MODEL

SERIAL NUMBER

UNIT:

mm

TC4002A-04

LXL1363

APP:

CHK:

DWN:

DATE:

DATE:

DATE: