




TC4004A

40CharsX4 Lines
1/16 Duty, 1/5Bias

External Dimension

<http://www.oppod.com>

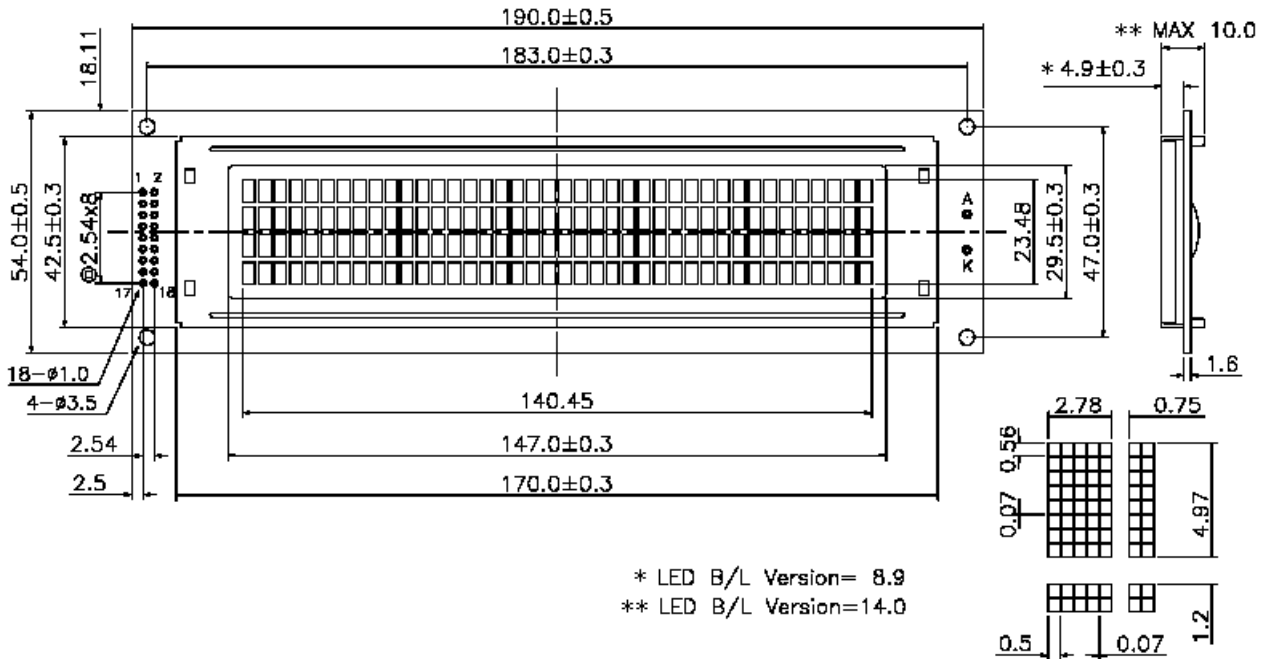

Mechanical Data

Item	Standard Value	Unit
Module size (W*H*T)	190.0*54.0*10.0/14.0	mm
View area (W*H)	147.0*29.5	mm
Active area (W*H)	140.5*23.48	mm
Dot size (W*H)	0.50*0.56	mm

Maximum Absolute Ratings

Item	Symbol	Value	Unit
Supply logic Volt.	$V_{DD} - V_{SS}$	-0.3 ~ +7.0	V
LCD driving Volt.	$V_{DD} - V_0$	-0.3 -13.0	V
Input Volt.	V_{in}	-0.3 ~ $V_{DD} + 0.3$	V
Operating temp.	T_{OPR}	-20 ~ +70	
Storage temp.	T_{STG}	-30 ~ +80	

Electrical Characteristics ($V_{DD} = 4.5V \sim 5.5V$)

Item	Symbol	Condition	Value	Unit
Supply logic Volt.	V_{DD}	---	5.0±0.5	V
Operating current	I_{DD}	$V_{DD}=5.0V$	3.0~5.0	mA
Input high volt.	V_{IH}	---	2.2~ V_{DD}	V
Input low volt.	V_{IL}	---	-0.3~0.6	V
Output high volt.	V_{oH}	$I_{oH}=-0.2mA$	2.4~ V_{DD}	V
Output low volt.	V_{oL}	$I_{oL}=1.2mA$	0~0.4	V
LCD driving volt.	V_{LCD}	$T_A=25$	4.6(Typ)	V

LED Backlight Characteristics ($T_A = 25$)

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Volt.	V_f	---	---	4.1	4.3	V
Led Current	I_f	$T_A=25$	---	500	---	mA
Power Dissipation	P_d	---	---	2000	---	mW

Interface Description

PIN	Symbol	Level	Description
1-4	DB7--DB4	H/L	In 8-bit mode, used as high data bus. In 4-bit mode, used as both high and low order. DB7 is used for Busy Flag .
5-8	DB3--DB0	H/L	In 8-bit mode, used as low order data bus. In 4-bit bus mode open these pins.
9	E1	H/L	Enable signal Of Chip 1
10	RW	H/L	H:Read L:Write
11	RS	H/L	H:Data L :Instruction
12	V_0	Variable	Driving voltage for LCD
13	V_{SS}	0V	Ground
14	V_{DD}	5.0V	Power supply for Logic
15	E2	H/L	Enable signal Of Chip 2
16	NC		No connection
17	A	+5V	Anode of LED Backlight
18	K	0V	Cathode of LED Backlight

Block Diagram

