

Surface Mount Directional Coupler

TCD-18-4-75+ TCD-18-4-75

75Ω

10 to 1000 MHz



Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Pin Connections

INPUT	3
OUTPUT	4
COUPLED	1
GROUND	2
75Ω TERM EXTERNAL	6
NOT USED	5

Features

- wideband, 10 to 1000 MHz
- low mainline loss, 0.7 dB typ.
- aqueous washable
- leads for excellent solderability
- protected by US Patent 6,140,887

Applications

- VHF/UHF
- CATV
- cellular

CASE STYLE: DB714
PRICE: \$1.49 ea. QTY (25)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Directional Coupler Electrical Specifications

FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)						DIRECTIVITY (dB)			VSWR (:1)	POWER INPUT, W				
	Nom.	Flatness	L		M		U		L	M	U		L	MU			
f _L -f _U			Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Max.
10-1000	18.0±0.5	±0.9	0.9	1.3	0.7	1.2	0.8	1.3	20	15	22	15	18	—	1.20	1.0	1.0


L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]

1. Mainline loss includes theoretical power loss at coupled port.

Outline Drawing

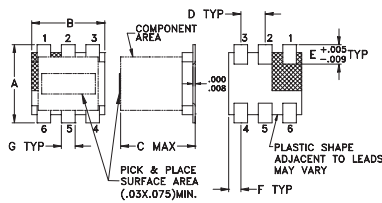

PCB Land Pattern




Suggested Layout.
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.15

Demo Board MCL P/N: TB-72 Suggested PCB Layout (PL-010)

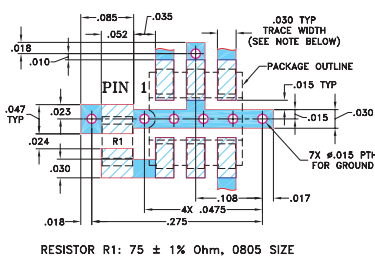

RESISTOR R1: 75 ± 1% Ohm, 0805 SIZE

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.




2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)


■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
10.00	0.80	18.25	24.89	19.65	21.19	19.31
30.00	0.75	18.09	28.81	21.21	23.47	21.05
50.00	0.75	18.07	29.10	21.46	23.88	21.36
90.00	0.75	18.05	28.90	21.60	23.98	21.20
100.00	0.75	18.05	28.77	21.62	23.96	21.20
300.00	0.73	18.00	25.91	21.12	23.00	22.63
500.00	0.75	17.87	23.32	20.19	21.20	25.64
700.00	0.75	17.64	21.87	20.17	20.48	28.73
900.00	0.79	17.44	21.22	21.04	20.47	32.11
1000.00	0.81	17.34	21.19	21.96	20.60	31.73

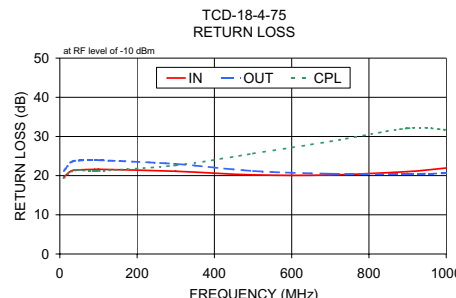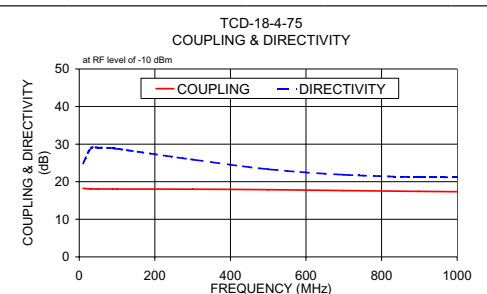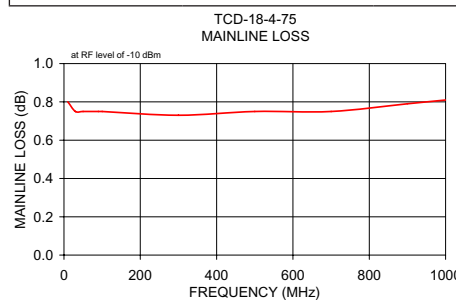

Electrical Schematic

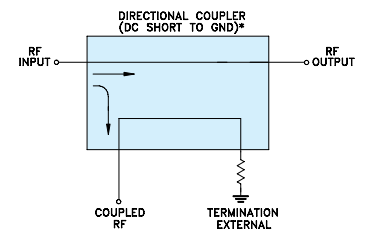

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. F
M119986
ED-8563/1
TCD-18-4-75
WZ/TD/CP/AM
081113