



Control Transformer

UL1585, Class 2

TCT40-01E07AB

Description:

Triad control transformers come with tamper resistant shrouds for safety and a steel bracket welded to the bottom of the transformer for ease of mounting. This style comes with ¼ inch Quick Connects.

Electrical Specifications (@25C):

Maximum Power: 40VA
 Input: 120V, 50/60 Hz
 Output: 24V @ 1.67 Amps

Construction:

These transformers are designed with dual bobbin construction and insulated shrouds on the primary and secondary sides. Welded laminations have holes in each corner to allow direct mounting to a panel.

Safety:

Since these products are inherently energy limited, no secondary fusing is required. Triad Control Transformers are designed and manufactured to meet the following agency approvals:



Agency Files:

UL: File E65390, UL 1585, Class 2, Component
 File E65390, Certified for Canada
 CSA: File 226495

Dimensions: (all dimensions in inches)





Corner holes in laminations: 0.16
 Spacing between corner holes: 2.19 (horizontal)
 Spacing between corner holes: 1.75 (vertical)
 All other dimensions: see drawing

Unit Pack Boxed Weight: 1.5 lbs

Pin Connections:

120V Primary: Pin 1 and Pin 2 Secondary: Pin 5 and Pin 6

*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

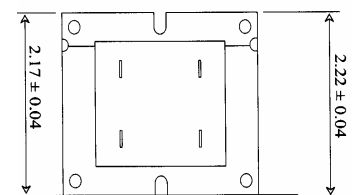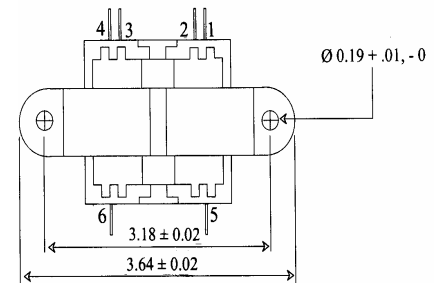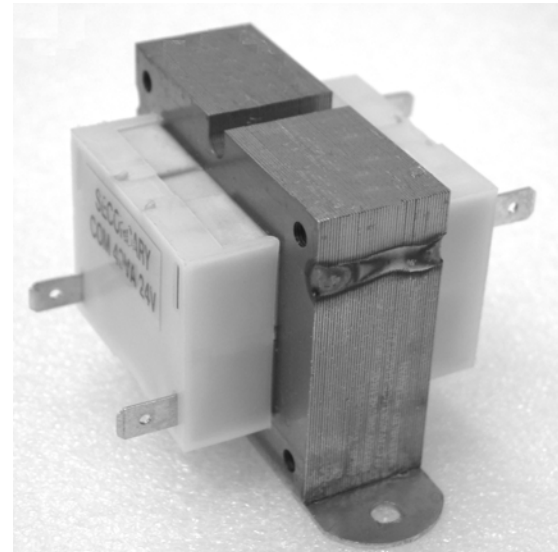

web: www.TriadMagnetics.com
 Phone 951-277-0757
 Fax 951-277-2757

22520B Temescal Canyon Road
 Corona, California
 92883

Release Date: August 27, 2004
 Revision: A