


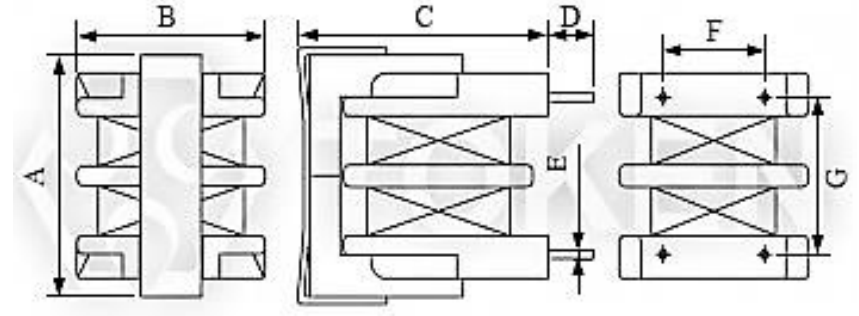
## TCUU16

### Configurations & Dimensions (Unit: mm) (TCUU16)

Type	A (max)	B (max)	C (max)	D	E	F	G
TCUU16	22.0	20.0	28.5	4.5	Φ0.7	10.0	13.0



(TCUU16) Image View



(TCUU16) Configurations & Dimensions

- Note: Design as Customer's Requested Specifications.

### Electrical Characteristics (TCUU16) at 25°C

Part Number	Inductance (mH)(min)	Inductance Balance (μH)(max)	DCR (Ω)(max)	IDC (A)(max)
TCUU16-152	1.5	40	0.125	1.90
TCUU16-402	4.0	60	0.27	1.20
TCUU16-802	8.0	80	0.46	0.90
TCUU16-203	20.0	150	1.60	0.50
TCUU16-303	30.0	200	2.50	0.40

Note:

- Test Freq.: 1.0kHz
- Allowable Current: D.C. Current When Temperature of Coil Increased up to 40°C. (Ta=25°C)