


Single high speed RS485 isolation transceiver module (automatic switching)

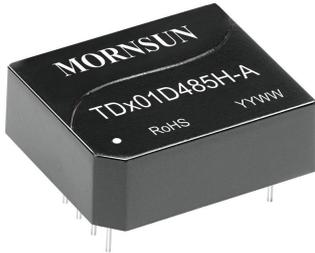

CE Report
EN62368-1

RoHS

FEATURES

- Integrated high efficient isolated DC-DC converter
- High baud rate of up to 115200bps
- Two-port isolation test voltage(2.5kVDC)
- Operating ambient temperature range: -40°C to +85°C
- The bus supports maximum 32 nodes
- Set isolation and ESD bus protection in one
- Automatic send and receive data function

The main function of the TD301D485H-A / TD501D485H-A series is to convert a logic level signal into isolated RS485 differential level signals. The special integrated IC technology of the RS485 transceiver achieves isolation between the power supply and the signal lines isolation, does RS485 communication and protects the bus all in one and the same module. The product's isolated power supply withstands a test voltage of up to 2500VDC. In addition, the product features an automatic switching function, that no longer requires the need to pass through the node to send and receive control signals, which to a certain extent, reduces the design complexity. Also, they can easily be embedded in the user's end equipment, to achieve fully functional RS485 network connections.

Selection Guide

Certification	Part No.	Power input (VDC)	Baud rate (bps)	Static Current (mA)	Max. Operating Current (mA)	Number of Nodes
EN	TD301D485H-A	3.17-3.45	115200	40	70	32
	TD501D485H-A	4.75-5.25	115200	40	70	32

3.3V Input Specifications

Item	Symbol	Min.	Typ.	Max.	Unit	
Power Supply Input Voltage	VCC	3.17	3.3	3.45	VDC	
TXD Logic Level	High-level	V_{IH}	0.7V _{CC}	3.3		3.6
	Low-level	V_{IL}	0	--		0.8
RXD Logic Level	High-level	V_{OH}	V _{CC} -0.4	3.1		--
	Low-level	V_{OL}	0	0.2		0.4
Pin Current	ITXD≤2mA; IRXD≤2mA					
Serial Interface	Compatible with + 3.3 V UART interface only					

5V Input Specifications

Item	Symbol	Min.	Typ.	Max.	Unit	
Power Supply Input Voltage	VCC	4.75	5	5.25	VDC	
TXD Logic Level	High-level	V_{IH}	0.7V _{CC}	5		5.5
	Low-level	V_{IL}	0	--		0.8
RXD Logic Level	High-level	V_{OH}	V _{CC} -0.4	4.8		--
	Low-level	V_{OL}	0	0.2		0.4
Pin Current	ITXD≤2mA; IRXD≤2mA					
Serial Interface	Compatible with + 5 V UART interface only					

Bus Interface

Item	Operating Conditions	Value
Output Port	RS485 Bus Interface	Standard RS485 interface, pull-up and pull-down resistors with 5.1kΩ each on A and B channels.

Transmission Specifications

Item	Operating Conditions	Value
Transmission rate		Maximum 115200 bps
Number of Nodes		Up to 32 nodes connected on one bus

Transceiver Control		Half duplex, automatic transmission				
Truth Table	Send status	Input		Output		
		TXD		A	B	
		1		1	0	
		0		0	1	
	Receive status ^①	Input		Output		
		A-B		RXD		
		≥-20mV		1		
		≤-220mV		0		
		-220mV < V _A -V _B < -20mV		Undefined state		

Note: ① Receiving threshold varies with V_{cc} will produce subtle error.

Output Specifications					
Item	Symbol	Min.	Typ.	Max.	Unit
Difference Level	V _{difff(d)} , No load	1.5	--	--	VDC
Difference Input Impedance	-7V ≤ V _{CM} ≤ +12V	94	--	--	kΩ
Bus Interface Protection	ESD protection				

General Specifications		
Item	Operating Conditions	Value
Electric Isolation		Two-terminal isolation (input and output are mutually isolated)
Isolation Test	Electric Strength Test for 1 min, leakage current <5mA	2.5kVDC
Operating Temperature		-40°C to +85°C
Transportation and Storage Temperature		-50°C to +105°C
Operating Humidity		10% - 90%
Case Temperature Rise	T _a =25°C	25°C (Typ.)
Safety Standard		EN62368-1 (Report)
Safety Class		CLASS III
Application Environment		The presence of dust, severe vibration, shock and corrosive gas may cause damage to the product

Mechanical Specifications	
Case Material	Black flame-retardant heat-proof plastic (UL94-V0)
Dimensions	DIP10
Weight	4.0g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)			
Emissions	CE	CISPR32/EN55032	CLASS A (see Fig.2)
	RE	CISPR32/EN55032	CLASS A (see Fig.2)
Immunity	ESD	IEC/EN61000-4-2	Contact ±4kV perf. Criteria B
		IEC/EN61000-4-4	Power supply port ±2kV (see Fig.2) perf. Criteria B
	EFT	IEC/EN61000-4-4	Signal port ±1kV (see Fig.2) perf. Criteria B
		Surge	IEC/EN61000-4-5
			Signal port ±2kV (line to line)/ ±4kV (line to ground) (see Fig.2) perf. Criteria B

Application Precautions

1. Carefully read and follow the instructions before use; contact our technical support if you have any question;
2. Do not use the product in hazardous areas;
3. Use only DC power supply source for this product. 220V AC power supply is prohibited;
4. It is strictly forbidden to disassemble the product privately in order to avoid product failure or malfunction;
5. Hot-swap is not supported;
6. If the external input of TXD is insufficient, the pull-up resistor should be added according to the situation.

After-sales service

1. Factory inspection and quality control are strictly enforced before shipping any product; please contact your local representative or our technical support if you experience any abnormal operation or possible failure of the module;
2. The products have a 3-year warranty period, from the date of shipment. The product will be repaired or exchanged free of charge within the warranty period for any quality problem that occurs under normal use.

Applied circuit

Refer to the *RS485 Isolated Industrial Bus Interface Module Application Manual*.

Design Reference

1. Typical application circuit

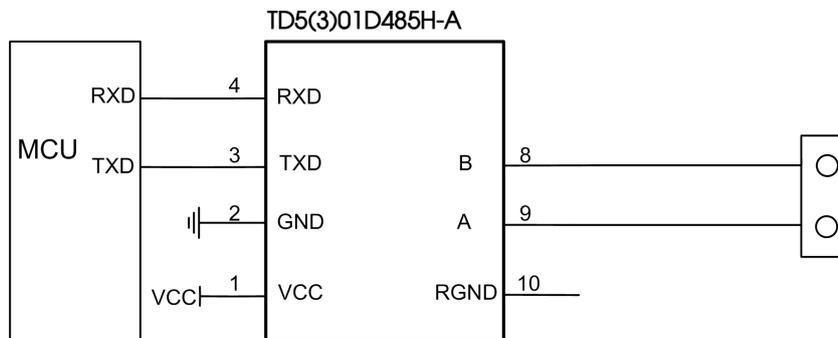


Fig. 1

2. Recommended port protection circuit

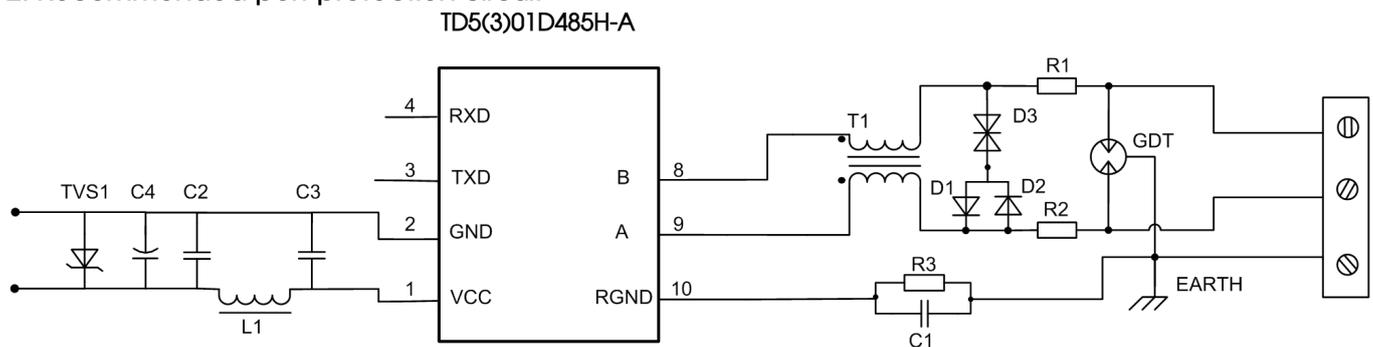



Fig. 2

Recommended components and values:

Component	Recommended part, value	Component	Recommended part, value
R3	1MΩ	R1、R2	2.7Ω /2W
C1	1nF, 2kV	D1、D2	1N4007
T1	ACM2520-301-2P	D3	SMBJ8.5CA
GDT	B3D090L	L1	10uH
C2、C3	1uF/50V	TVS1	SMCJ5.0A (TD301D485H-A) / SMCJ6.5A(TD501D485H-A)
C4	220uF/10V(Electrolytic capacitor)		

3. For additional information, please refer to our application note on www.mornsun-power.com

Dimensions and Recommended Layout

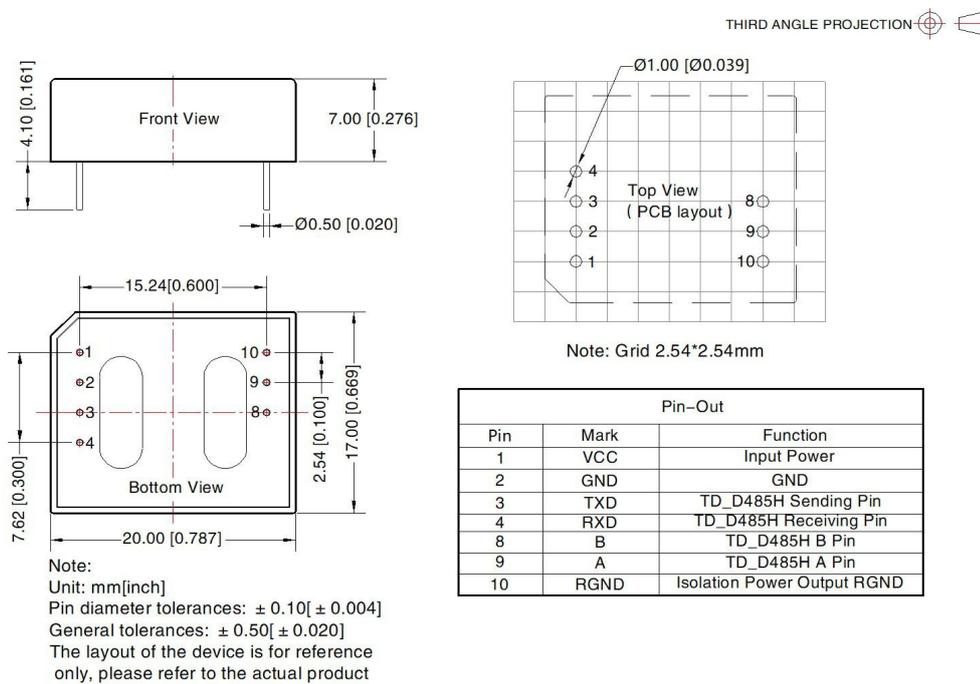

Notes:

- For additional information on Product Packaging please refer to www.mornsun-power.com. The Packaging bag number: 58040012;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on company corporate standards;
- The above are the performance indicators of the product models listed in this datasheet. Some indicators of non-standard models will exceed the above requirements. For details, please contact our technical staff;
- We can provide product customization service;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com