

N-Channel Enhancement Mode MOSFET

TDM3452

DESCRIPTION


The TDM3452 uses advanced trench technology to provide excellent $R_{DS(ON)}$ and low gate charge. This device is suitable for use as a load switch or in PWM applications.

GENERAL FEATURES

- $R_{DS(ON)} < 5.1m\Omega$ @ $V_{GS}=4.5V$
 $R_{DS(ON)} < 3.3m\Omega$ @ $V_{GS}=10V$
- High Power and current handling capability
- Lead free product is available
- Surface Mount Package

Application

- PWM applications
- Load switch
- Power management

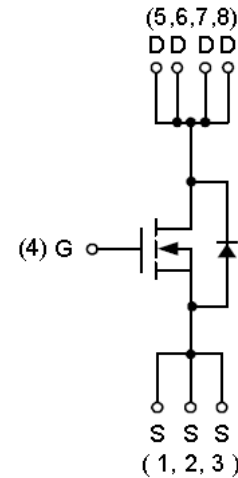ABSOLUTE MAXIMUM RATINGS($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current @ Continuous(Note 1)	I_D ($T_C=25^\circ\text{C}$)	80*	A
	I_D ($T_C=100^\circ\text{C}$)	60	A
Drain Current @ Current-Pulsed (Note 2)	I_{DM} ($T_C=25^\circ\text{C}$)	160	A
Drain Current @ Continuous(Note 3)	I_D ($T_A=25^\circ\text{C}$)	23.5	A
	I_D ($T_A=100^\circ\text{C}$)	18.8	A
Maximum Power Dissipation (Note 3)	P_D	2.5	W
Maximum Operating Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 To 150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Thermal Resistance, Junction-to-Ambient (Note 3)	$R_{\theta JA}$	50	$^\circ\text{C}/\text{W}$
--	-----------------	----	---------------------------

N-Channel Enhancement Mode MOSFET

TDM3452

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)


Parameter	Symbol	Condition	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V I _D =250μA	30	-	-	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =24V,V _{GS} =0V	-	-	1	μ A
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V,V _{DS} =0V	-	-	± 100	nA
ON CHARACTERISTICS (Note 4)						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} ,I _D =250μA	1.4	1.7	2.4	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} =4.5V, I _D =15A	-	4.2	5.1	mΩ
		V _{GS} =10V, I _D =20A	-	2.7	3.3	mΩ
DYNAMIC CHARACTERISTICS (Note5)						
Input Capacitance	C _{iss}	V _{DS} =15V,V _{GS} =0V, F=1.0MHz	-	1345	-	PF
Output Capacitance	C _{oss}		-	908	-	PF
Reverse Transfer Capacitance	C _{rss}		-	60	-	PF
SWITCHING CHARACTERISTICS (Note 5)						
Turn-on Delay Time	t _{d(on)}	V _{DS} =12V, R _L =2.1Ω, V _{GEN} =10V, R _G =2.9 Ω I _D =5.7A	-	14.3	-	nS
Turn-on Rise Time	t _r		-	26	-	nS
Turn-Off Delay Time	t _{d(off)}		-	24	-	nS
Turn-Off Fall Time	t _f		-	4.4	-	nS
Total Gate Charge	Q _g	V _{DS} =15V,I _D =20A,V _{GS} =4.5V	-	9.2	-	nC
Gate-Source Charge	Q _{gs}		-	6	-	nC
Gate-Drain Charge	Q _{gd}		-	2	-	nC
Body Diode Reverse Recovery Time	T _{rr}	I _F =20A, dI/dt=100A/μs	-	21	-	nS
Body Diode Reverse Recovery Charge	Q _{rr}		-	6.3	-	nC
DRAIN-SOURCE DIODE CHARACTERISTICS						
Diode Forward Voltage (Note 4)	V _{SD}	V _{GS} =0V,I _S =20A	-	0.81	1.1	V

NOTES:


- * Max. continue current is limited by bonding wire.
- Pulse width limited by max. junction temperature.
- $R_{\theta JA}$ steady state $t=100s$.
- Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.
- Guaranteed by design, not subject to production testing.

Typical Operating Characteristics


Power Dissipation

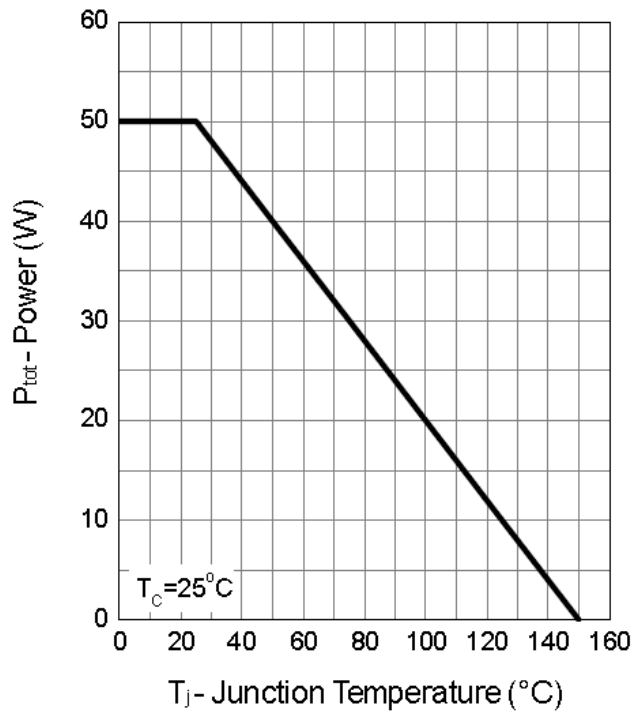


Drain Current

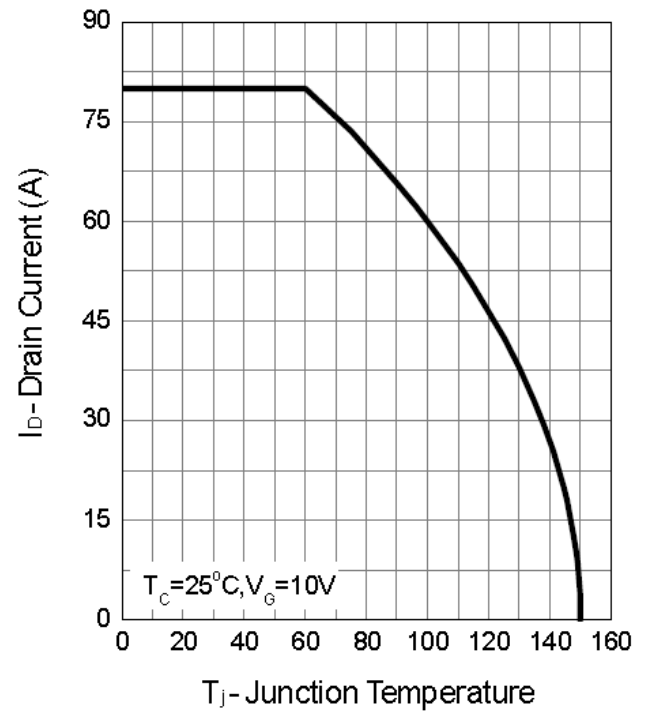

Safe Operation Area

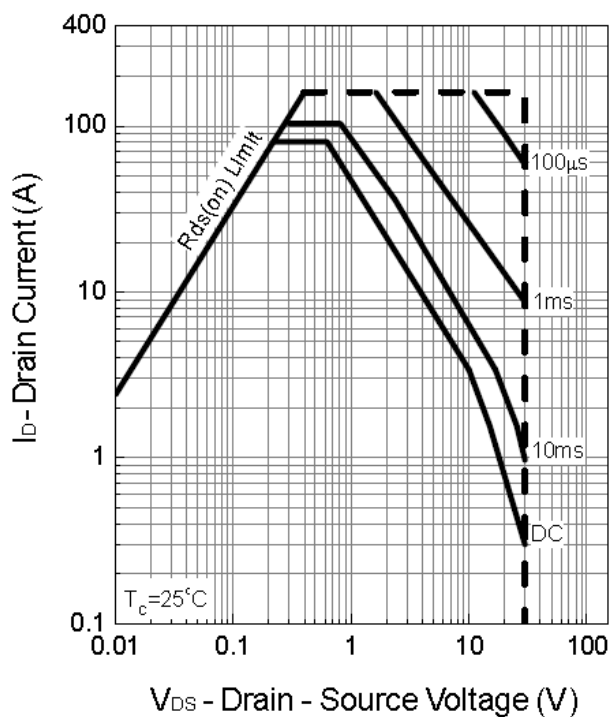


Thermal Transient Impedance

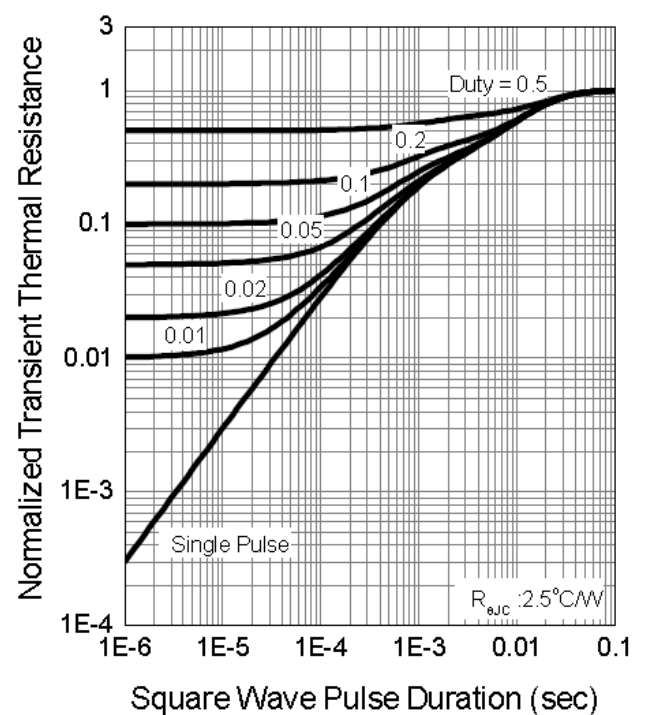


Typical Operating Characteristics(Cont.)


Safe Operation Area

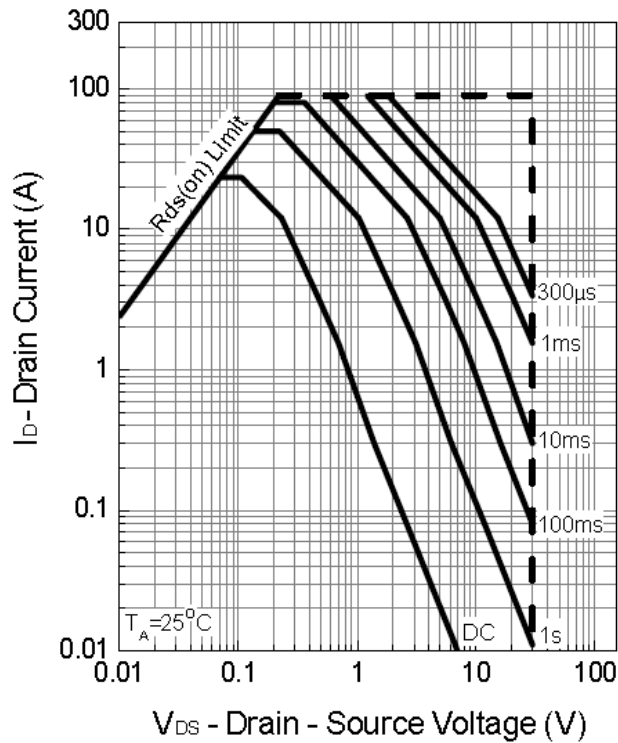


Thermal Transient Impedance

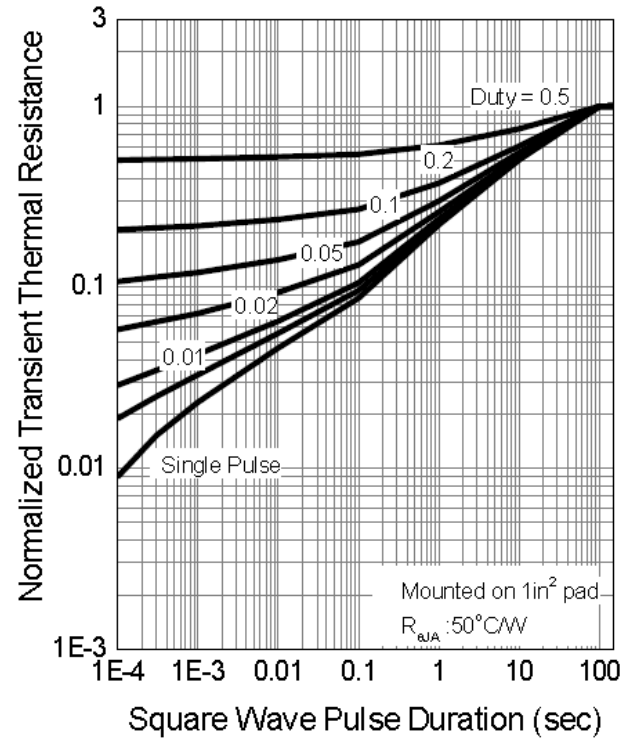

Output Characteristics

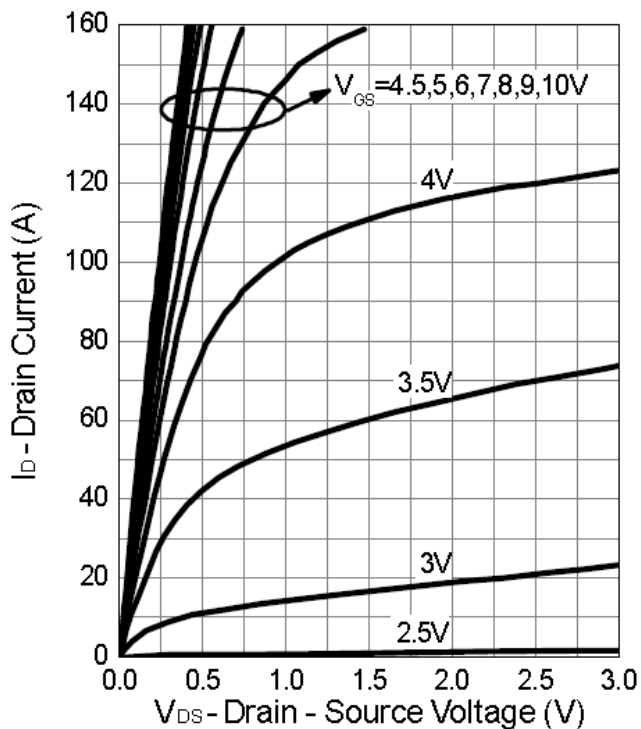


Drain-Source On Resistance

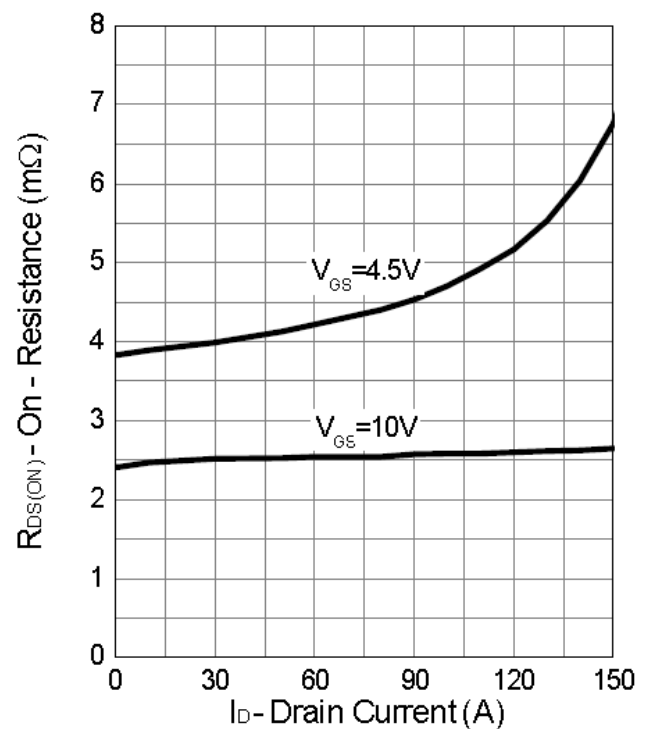


Typical Operating Characteristics (Cont.)


Gate-Source On Resistance

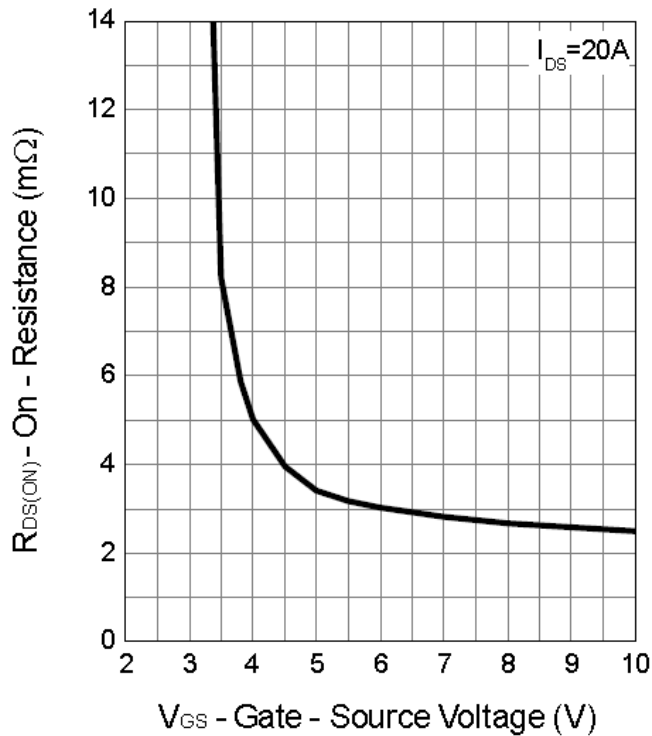


Gate Threshold Voltage

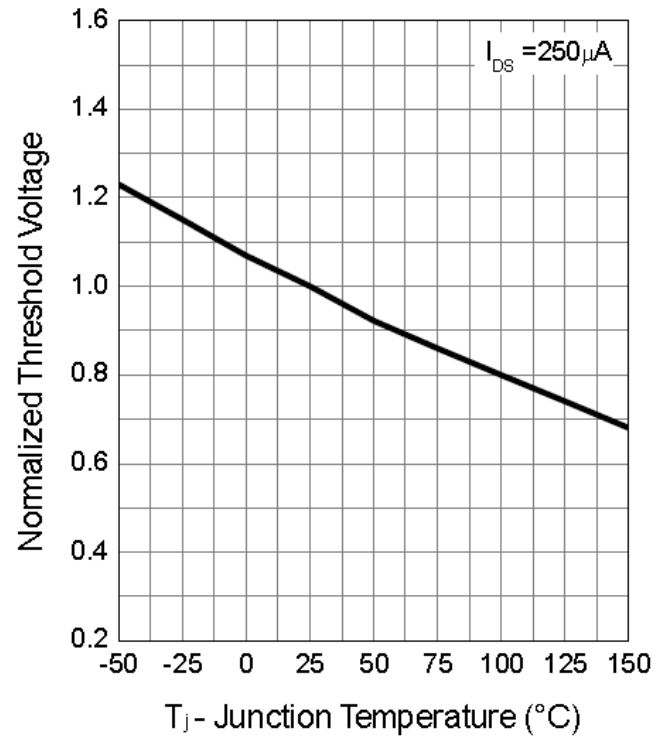

Drain-Source On Resistance

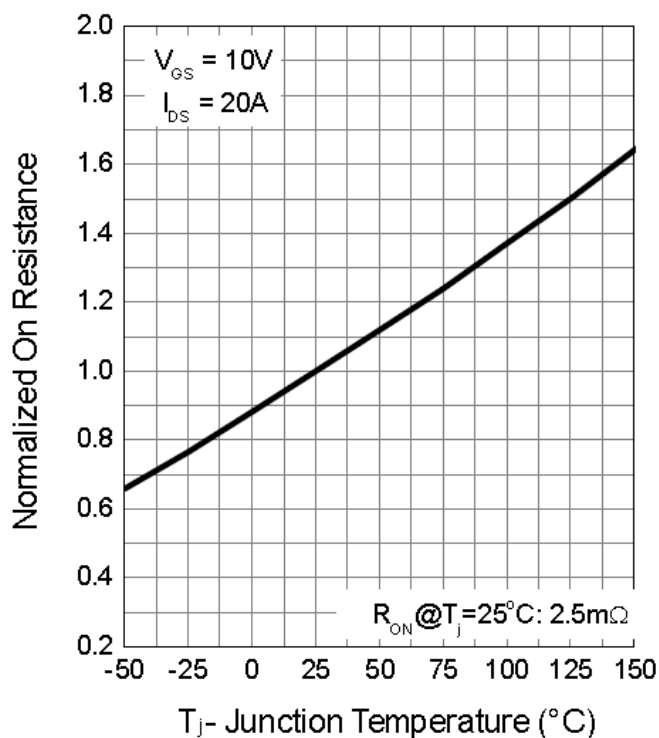


Source-Drain Diode Forward

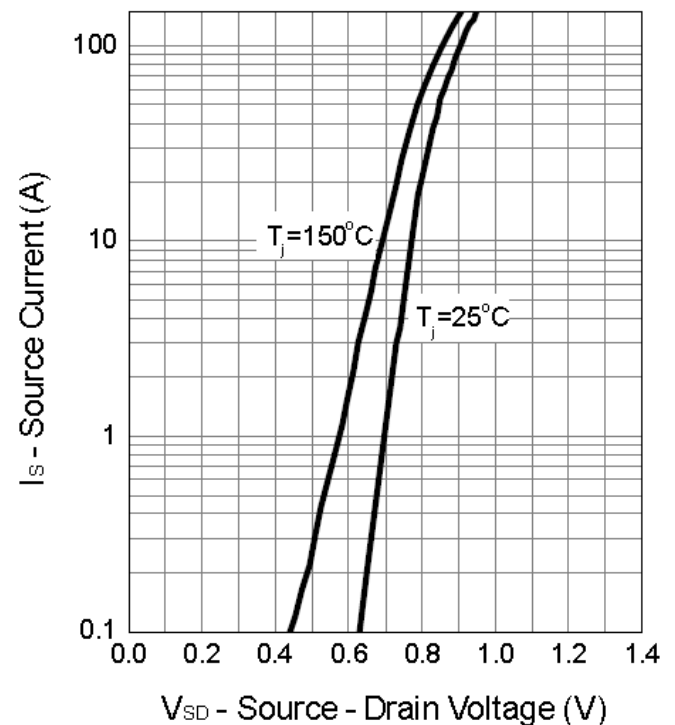


Typical Operating Characteristics (Cont.)


Capacitance

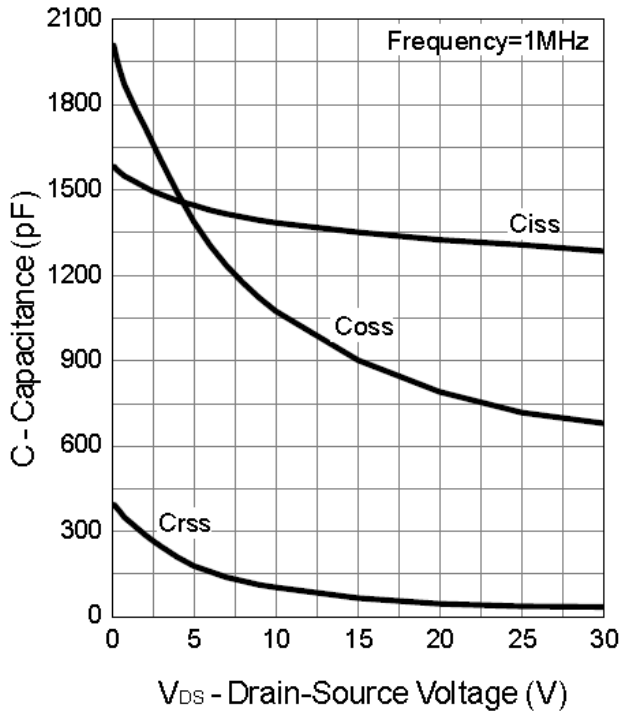

Gate Charge

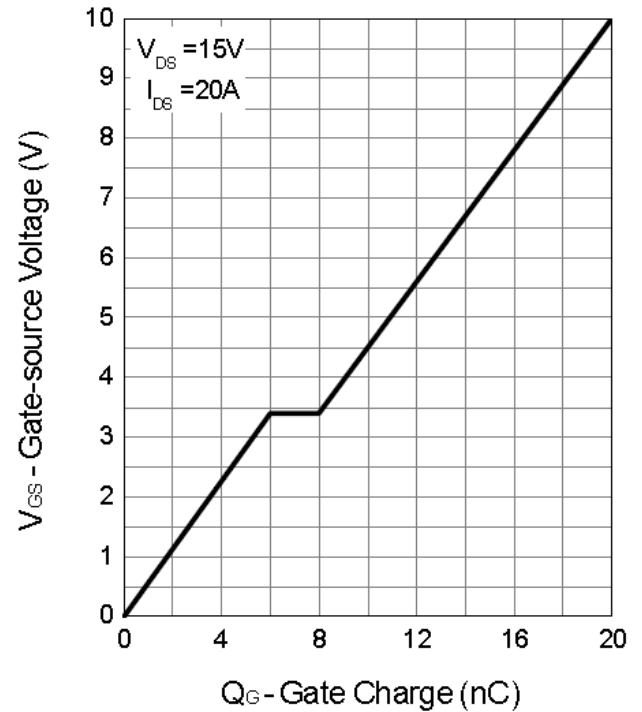

Transfer Characteristics

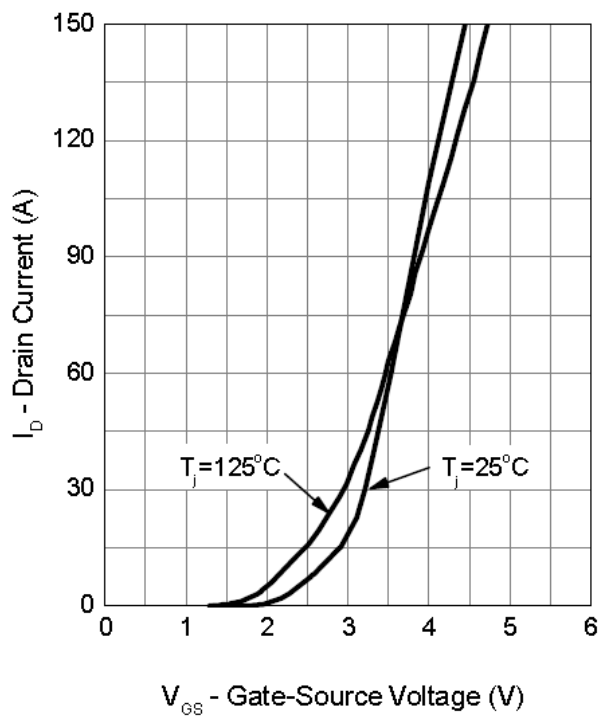


N-Channel Enhancement Mode MOSFET

TDM3452


Package Information

DFN5*6-8 Package

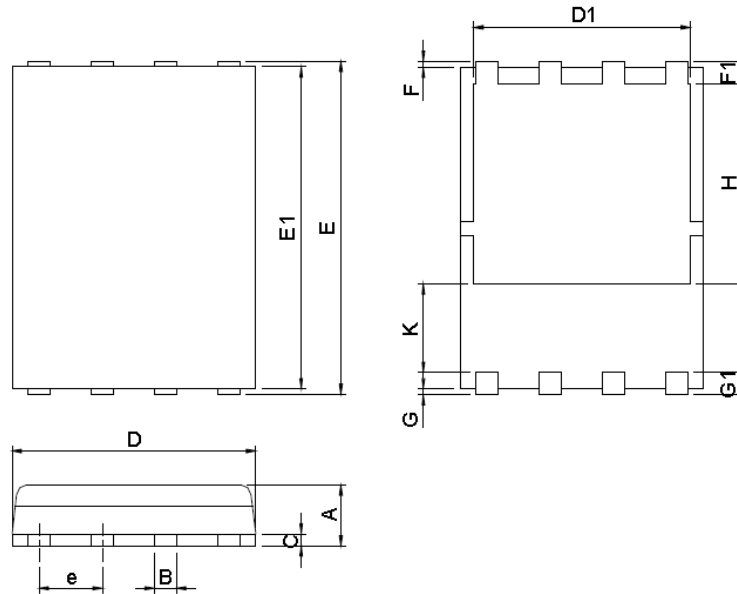

DIMENSIONS	DFN5x6-8			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	0.90	1.20	0.035	0.047
B	0.3	0.51	0.012	0.020
C	0.19	0.25	0.007	0.010
D	4.80	5.30	0.189	0.209
D1	4.00	4.40	0.157	0.173
E	5.90	6.20	0.232	0.244
E1	5.50	5.80	0.217	0.228
e	1.27 BSC		0.050 BSC	
F	0.05	0.30	0.002	0.012
F1	0.35	0.75	0.014	0.030
G	0.05	0.30	0.002	0.012
G1	0.35	0.75	0.014	0.030
H	3.34	3.9	0.131	0.154
K	0.762	-	0.03	-

RECOMMENDED LAND PATTERN

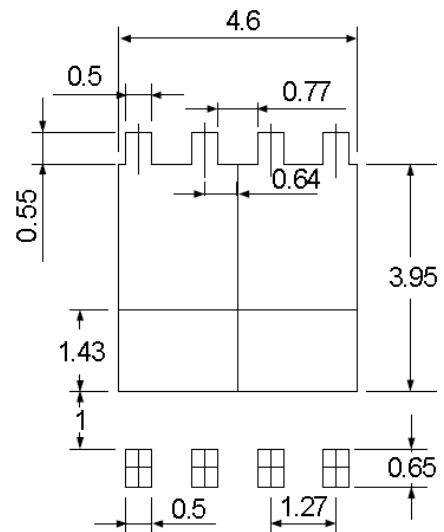

UNIT: mm

Note : 1.Dimension D, D1,D2 and E1 do not include mold flash or protrusions.
Mold flash or protrusions shall not exceed 10 mil.

Design Notes