



# Topstek Current Transducer TH3A .. TH50A


## TH 3A~50A

### Features

- ◆ Highly reliable Hall Effect device
- ◆ Compact and light weight
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 50 kHz)
- ◆ Low power consumption (12 mA nominal)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulate, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

### Applications

- ◆ UPS systems
- ◆ Industrial robots
- ◆ NC tooling machines
- ◆ Elevator controllers
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Power supply for laser processing machines
- ◆ Controller for traction equipment e.g. electric trains
- ◆ Other automatic control systems

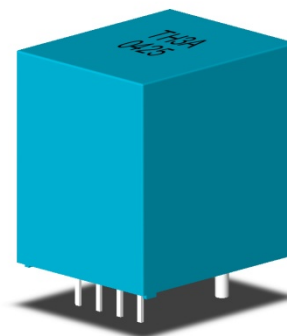

### Specifications

Parameter	Symbol	Unit	TH3A .. TH50A	TH3A-B12 .. TH50A-B12
Nominal Input Current	$I_{fn}$	A DC	3 .. 50	
Linear Range	$I_{fs}$	A DC	$\pm 9 .. \pm 150 = 3x I_{fn}$	$\pm 7.2 .. \pm 120 = 2.4x I_{fn}$
Nominal Output Voltage	$V_{hn}$	V	4 V $\pm 1\%$ at $I_f = I_{fn}$ ( $R_L = 10k\Omega$ )	
Offset Voltage	$V_{os}$	mV	Within $\pm 40$ mV @ $I_f = 0$ , $T_a = 25^\circ C$	
Output Resistance	$R_{OUT}$	$\Omega$	<100 $\Omega$	
Hysteresis Error	$V_{oh}$	mV	Within $\pm 15$ mV @ $I_f = I_{fn} \rightarrow 0$	
Supply Voltage	$V_{CC}/V_{EE}$	V	$\pm 15V \pm 5\%$	$\pm 12V \pm 5\%$
Linearity	$\rho$	%	Within $\pm 1\%$ of $I_{fn}$	
Consumption Current	$I_{CC}$	mA	$\pm 12$ mA nominal, $\pm 16$ mA max	
Response Time (90% $V_{hn}$ )	$T_r$	$\mu sec$	5 $\mu sec$ max. @ $d I_f / dt = I_{fn} / \mu sec$	
Frequency bandwidth (-3dB)	$f_{BW}$	Hz	DC to 50kHz	
Thermal Drift of Output	-	%/ $^\circ C$	Within $\pm 0.1$ %/ $^\circ C$ @ $I_{fn}$	
Thermal Drift of Zero Current Offset	-	mV/ $^\circ C$	Within $\pm 1.5$ mV/ $^\circ C$ @ $I_{fn}$	
Dielectric Strength	-	V	AC2.5KV X 60 sec	
Isolation Resistance @ 1000 VDC	$R_{IS}$	M $\Omega$	>1000 M $\Omega$	
Operating Temperature	$T_a$	$^\circ C$	-15 $^\circ C$ to 80 $^\circ C$	
Storage Temperature	$T_s$	$^\circ C$	-20 $^\circ C$ to 85 $^\circ C$	
Mass	W	g	10 g	






# Topstek Current Transducer TH3A .. TH50A



## Appearance, dimensions and pin identification for TH3A .. TH30A models

All dimensions in mm  $\pm 0.5$ , holes  $-0, +0.2$  except otherwise noted.

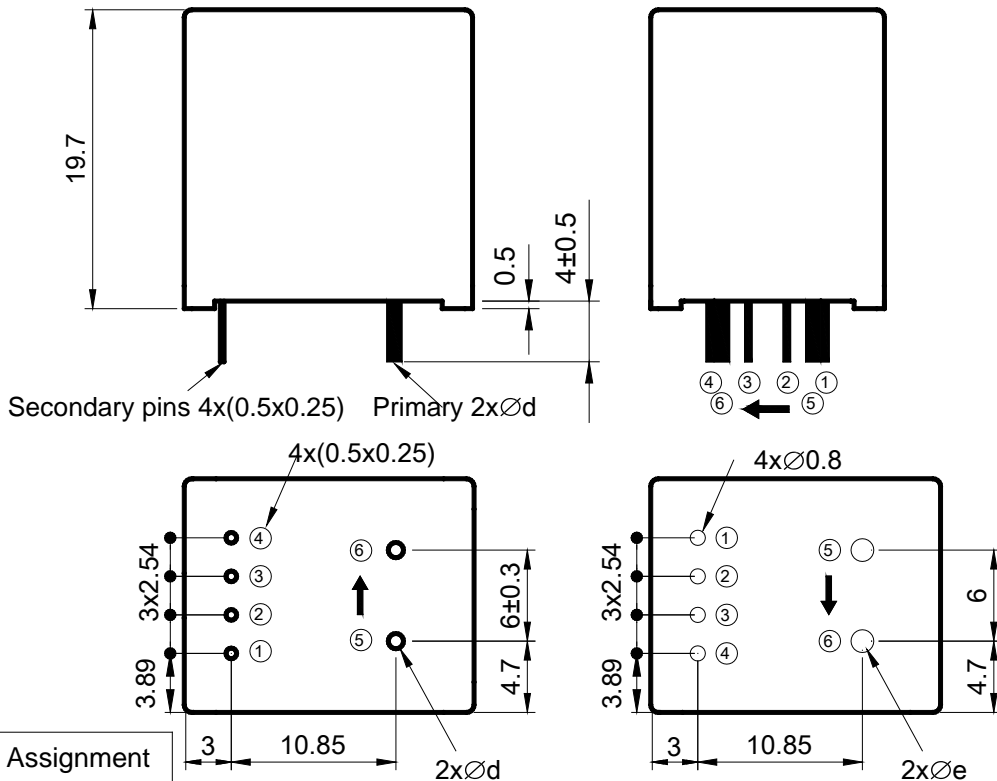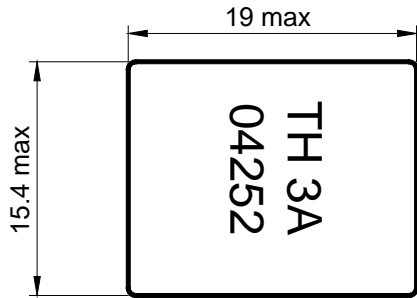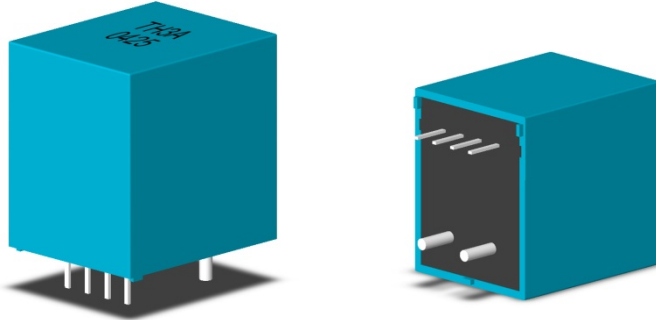

Pin Assignment	
①	-15V
②	0V
③	+15V
④	Vout
⑤	I +
⑥	I -

Bottom View

PCB mounting hole layout  
Positive current flow direction

Part Number	1-3A	4-6A	6-9A	10-12.5A	13-18.5A	20-30A
d(mm)	0.6	0.8	1.0	1.2	1.4	1.6
e(mm)	1.2	1.2	1.6	1.8	2.2	2.4







# Topstek Current Transducer TH3A .. TH50A

Appearance, dimensions and pin identification for TH37.5A .. TH50A models

All dimensions in mm  $\pm 0.5$ , holes  $-0, +0.2$  except otherwise noted.

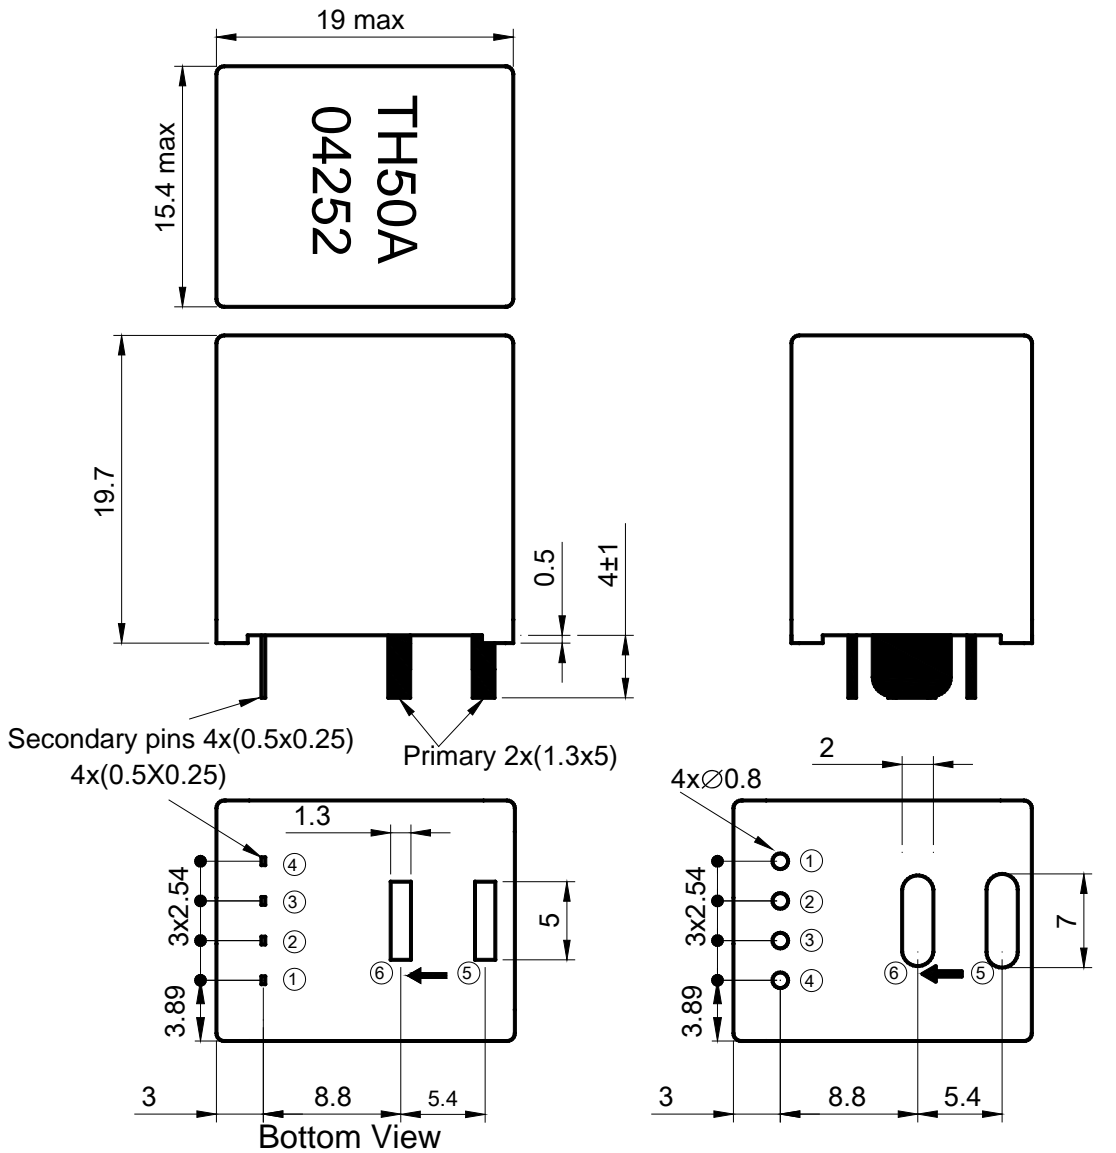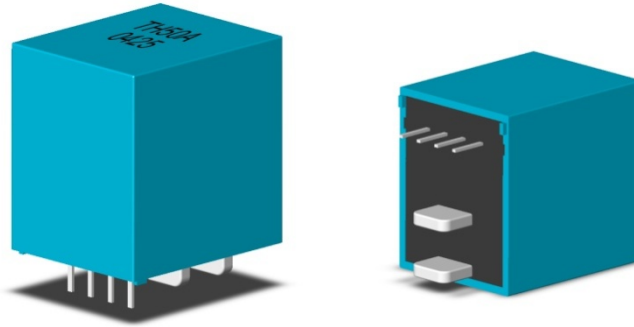

Secondary pins 4x(0.5x0.25)  
4x(0.5X0.25)      Primary 2x(1.3x5)

Pin Assignment	
①	-15V
②	0V
③	+15V
④	Vout
⑤	I +
⑥	I -

PCB mounting hole layout  
→ Positive current flow direction

Part Number	TH37.5A	TH50A
d(mm)	□1.3x5	□1.3x5
e(mm)	□2.0x6	□2.0x6

