

## HIGH VOLTAGE FAST-SWITCHING NPN POWER TRANSISTOR

- SGS-THOMSON PREFERRED SALESTYPE
- HIGH VOLTAGE CAPABILITY
- U.L. RECOGNISED ISOWATT218 PACKAGE (U.L. FILE # E81734 (N))



**APPLICATIONS:**

- HORIZONTAL DEFLECTION FOR COLOUR TV AND MONITORS

**DESCRIPTION**

The THD219HI is manufactured using Multiepitaxial Mesa technology for cost-effective high performance end uses a Hollow Emitter structure to enhance switching speeds.

The THD series is designed for use in horizontal deflection circuits in televisions and monitors.

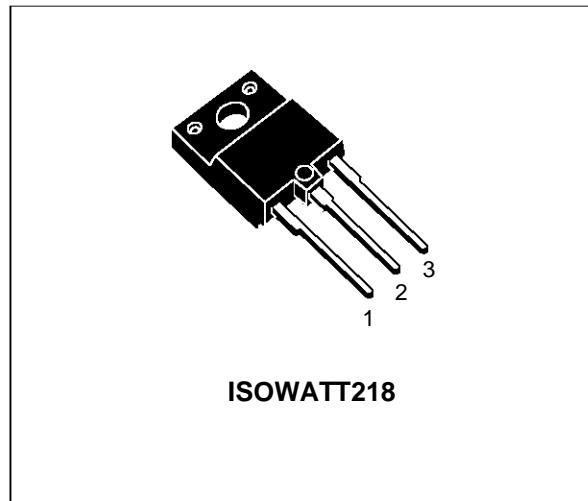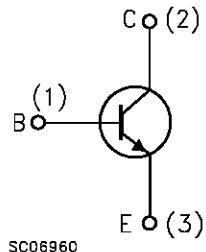
**INTERNAL SCHEMATIC DIAGRAM**

**ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Value	Unit
$V_{CBO}$	Collector-Base Voltage ( $I_E = 0$ )	1500	V
$V_{CEO}$	Collector-Emitter Voltage ( $I_B = 0$ )	700	V
$V_{EBO}$	Emitter-Base Voltage ( $I_C = 0$ )	10	V
$I_C$	Collector Current	8	A
$I_{CM}$	Collector Peak Current ( $t_p < 5 \text{ ms}$ )	15	A
$I_B$	Base Current	5	A
$I_{BM}$	Base Peak Current ( $t_p < 5 \text{ ms}$ )	8	A
$P_{tot}$	Total Dissipation at $T_c = 25^\circ\text{C}$	54	W
$T_{stg}$	Storage Temperature	-65 to 150	$^\circ\text{C}$
$T_j$	Max. Operating Junction Temperature	150	$^\circ\text{C}$

# THD219HI

## THERMAL DATA


$R_{thj-case}$	Thermal Resistance Junction-case	Max	2.3	$^{\circ}\text{C/W}$
----------------	----------------------------------	-----	-----	----------------------

## ELECTRICAL CHARACTERISTICS ( $T_{case} = 25 \text{ }^{\circ}\text{C}$ unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_{CES}$	Collector Cut-off Current ( $V_{BE} = 0$ )	$V_{CE} = 1500 \text{ V}$ $V_{CE} = 1500 \text{ V} \quad T_j = 125 \text{ }^{\circ}\text{C}$			1 2	mA mA
$I_{EBO}$	Emitter Cut-off Current ( $I_C = 0$ )	$V_{EB} = 5 \text{ V}$			100	$\mu\text{A}$
$V_{CEO(sus)}$	Collector-Emitter Sustaining Voltage	$I_C = 100 \text{ mA}$	700			V
$V_{EBO}$	Emitter-Base Voltage ( $I_C = 0$ )	$I_E = 10 \text{ mA}$	10			V
$V_{CE(sat)*}$	Collector-Emitter Saturation Voltage	$I_C = 6 \text{ A} \quad I_B = 1.5 \text{ A}$			1.5	V
$V_{BE(sat)*}$	Base-Emitter Saturation Voltage	$I_C = 6 \text{ A} \quad I_B = 1.5 \text{ A}$			1.3	V
$h_{FE}*$	DC Current Gain	$I_C = 6 \text{ A} \quad V_{CE} = 5 \text{ V}$	6.5		13	
$t_s$ $t_f$	RESISTIVE LOAD Storage Time Fall Time	$V_{CC} = 400 \text{ V} \quad I_C = 5 \text{ A}$ $I_{B1} = 1.25 \text{ A} \quad I_{B2} = 2.5 \text{ A}$		2.7 190	3.9 280	$\mu\text{s}$ ns
$t_s$ $t_f$	INDUCTIVE LOAD Storage Time Fall Time	$I_C = 5 \text{ A} \quad f = 15625 \text{ Hz}$ $I_{B1} = 1.25 \text{ A} \quad I_{B2} = -2.5 \text{ A}$ $V_{ceflyback} = 1050 \sin\left(\frac{\pi}{10} 10^6\right) t \text{ V}$		2.3 370		$\mu\text{s}$ ns
$t_s$ $t_f$	INDUCTIVE LOAD Storage Time Fall Time	$I_C = 5 \text{ A} \quad f = 31250 \text{ Hz}$ $I_{B1} = 1.25 \text{ A} \quad I_{B2} = -2.5 \text{ A}$ $V_{ceflyback} = 1200 \sin\left(\frac{\pi}{5} 10^6\right) t \text{ V}$		2.3 210		$\mu\text{s}$ ns

\* Pulsed: Pulse duration = 300  $\mu\text{s}$ , duty cycle 1.5 %


## Safe Operating Area

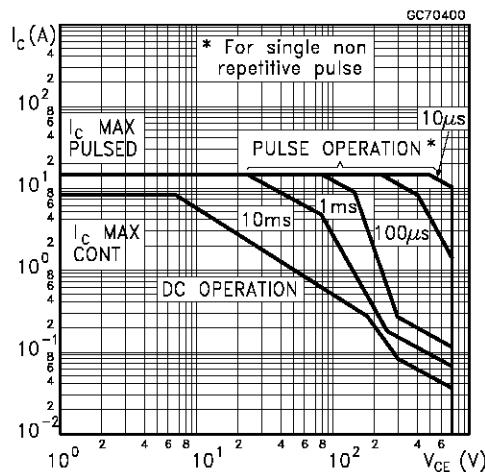


## Thermal Impedance

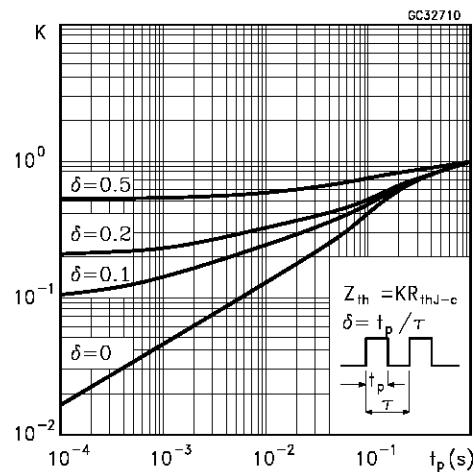


Derating Curve

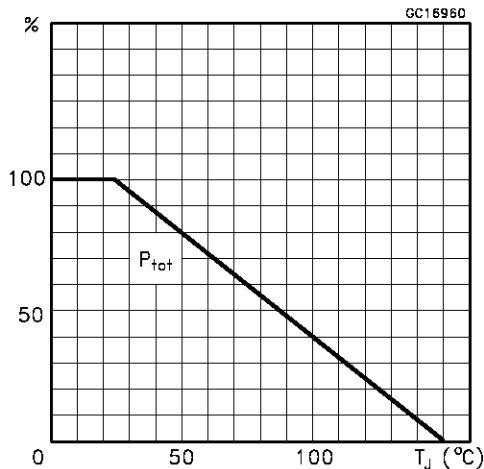


DC Current Gain

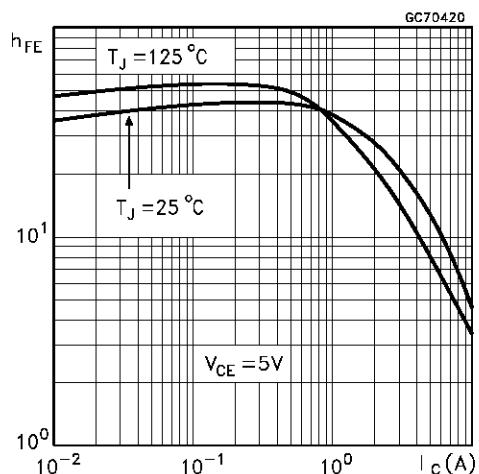


Collector Emitter Saturation Voltage

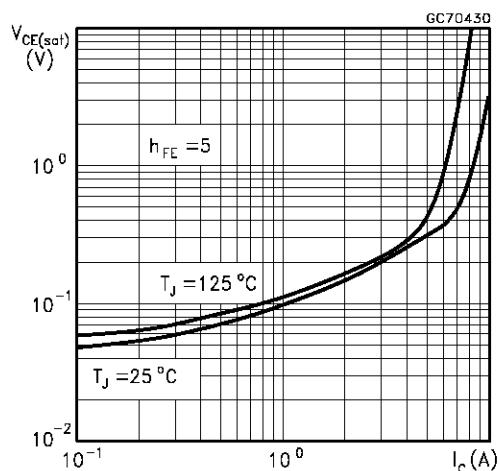


Base Emitter Saturation Voltage

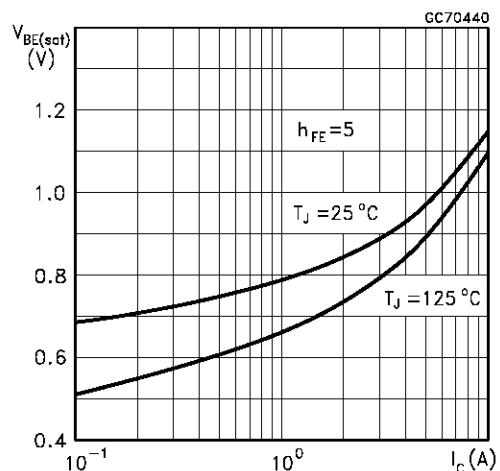

Power Losses at 32 KHz

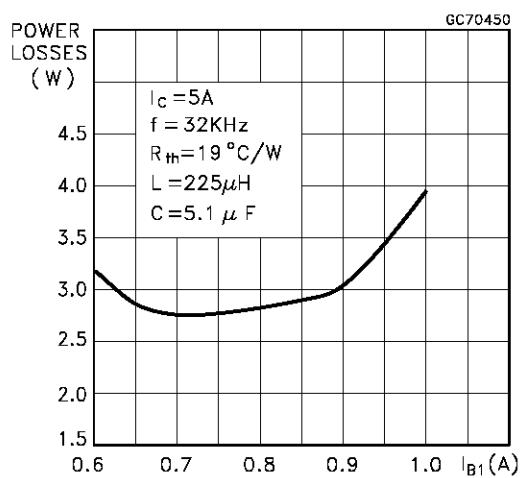


Power Losses at 64 KHz

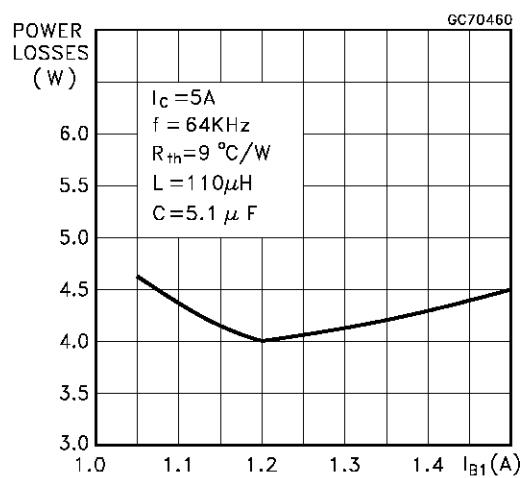


## THD219HI

---


Switching Time Inductive Load at 32 KHz

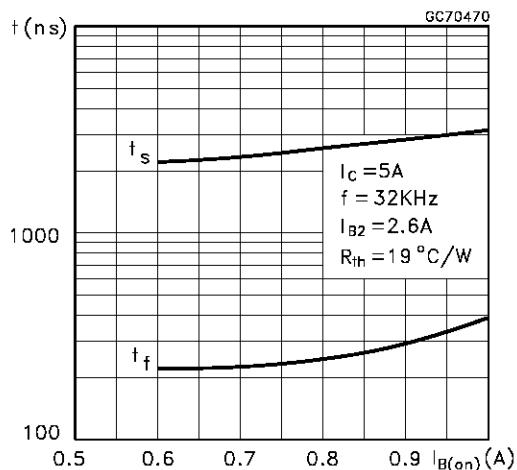

Switching Time Inductive Load at 64 KHz

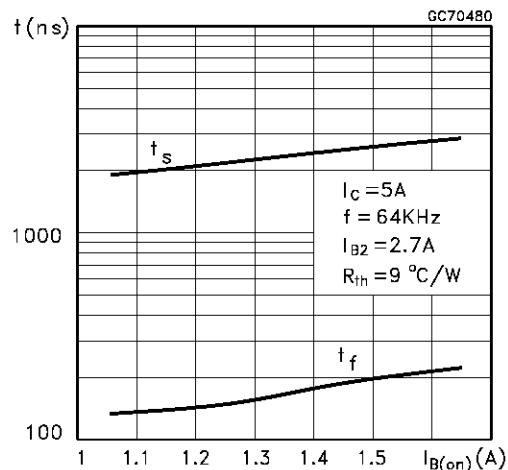


Reverse Biased SOA

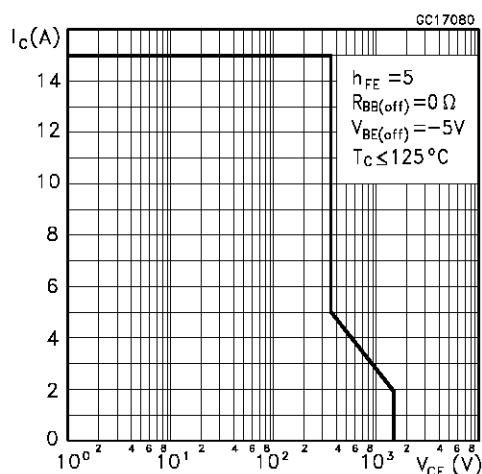

## ISOWATT218 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	5.35		5.65	0.210		0.222
C	3.3		3.8	0.130		0.149
D	2.9		3.1	0.114		0.122
D1	1.88		2.08	0.074		0.081
E	0.75		1	0.029		0.039
F	1.05		1.25	0.041		0.049
G	10.8		11.2	0.425		0.441
H	15.8		16.2	0.622		0.637
L1	20.8		21.2	0.818		0.834
L2	19.1		19.9	0.752		0.783
L3	22.8		23.6	0.897		0.929
L4	40.5		42.5	1.594		1.673
L5	4.85		5.25	0.190		0.206
L6	20.25		20.75	0.797		0.817
M	3.5		3.7	0.137		0.145
N	2.1		2.3	0.082		0.090
U		4.6			0.181	

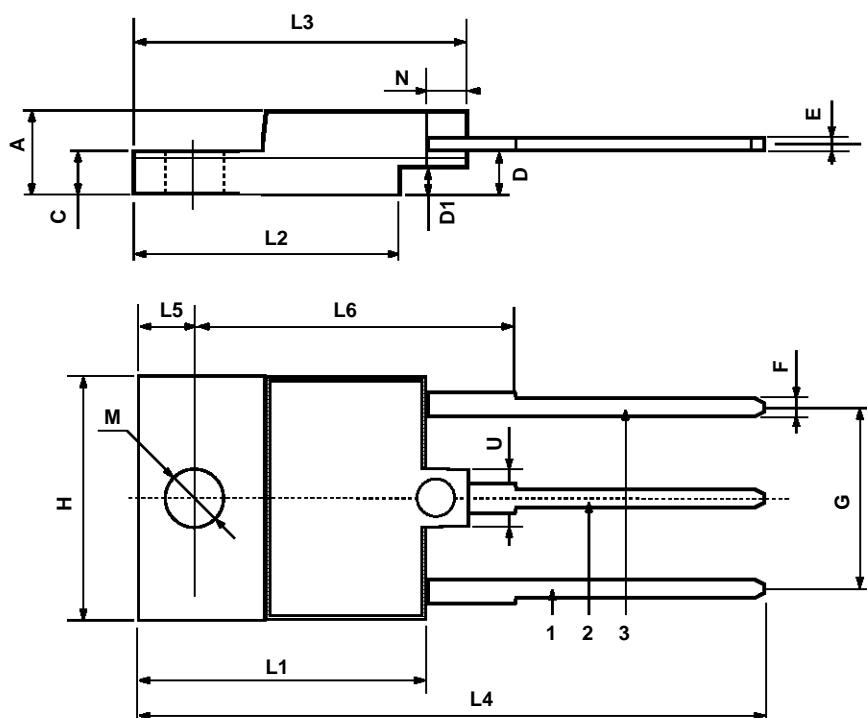

P025C

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1996 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -  
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A