


Medium Power Linear Switching Applications

TIP122

FEATURES

- Complementary to TIP127.
- MSL 3

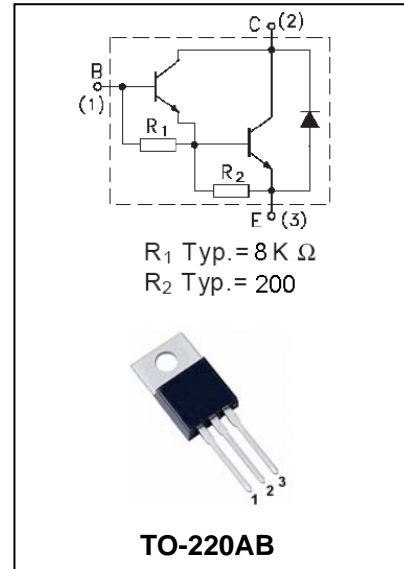

MAXIMUM RATING operating temperature range applies unless otherwise specified

Symbol	Parameter	Value	Unit	
V _{CBO}	Collector-Base Voltage	100	V	
V _{CEO}	Collector-Emitter Voltage	100	V	
V _{EBO}	Emitter-Base Voltage	5	V	
I _C	Collector Current	DC Pulse	5 8	A
I _B	Base Current	120	mA	
P _C	Collector Dissipation	T _a =25°C T _C =25°C	2 65	W
T _j , T _{stg}	Junction and Storage Temperature	-65 to +150	°C	

Medium Power Linear Switching Applications

TIP122

ELECTRICAL CHARACTERISTICS Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-emitter Sustaining Voltage	$V_{CEO(SUS)}$	$I_C=100mA, I_B=0$	100			V
Collector Cut-off Current	I_{CEO}	$V_{CE}=50V, I_B=0$			0.5	mA
Collector Cut-off Current	I_{CBO}	$V_{CB}=100V, I_E=0$			0.2	mA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=5V, I_C=0$			2	mA
DC Current Gain	h_{FE}	$V_{CE}=3V, I_C=0.5A$ $V_{CE}=3V, I_C=3A$	1000 1000			
Collector-emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=3A, I_B=12mA$ $I_C=5A, I_B=20mA$			2.0 4.0	V
Base-emitter on Voltage	$V_{BE(on)}$	$V_{CE}=3V, I_C=3A$			2.5	V
Output Capacitance	C_{ob}	$V_{CB}=10V, I_E=0,$ $f=0.1MHz$			200	pF

Medium Power Linear Switching Applications

TIP122

TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

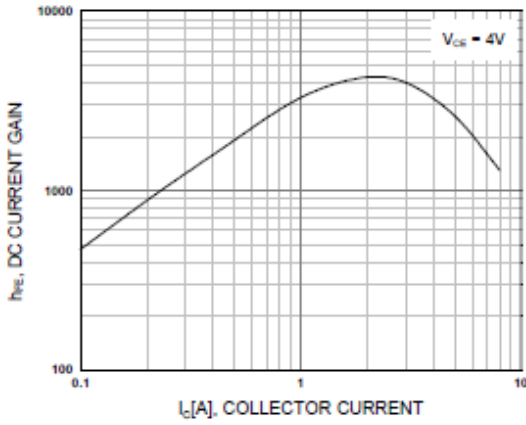


Figure 1. DC current Gain

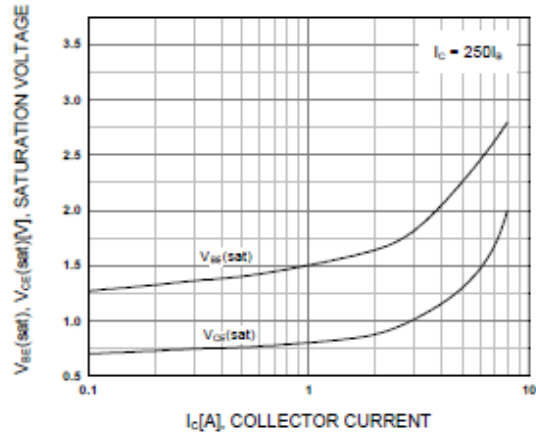


Figure 2. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

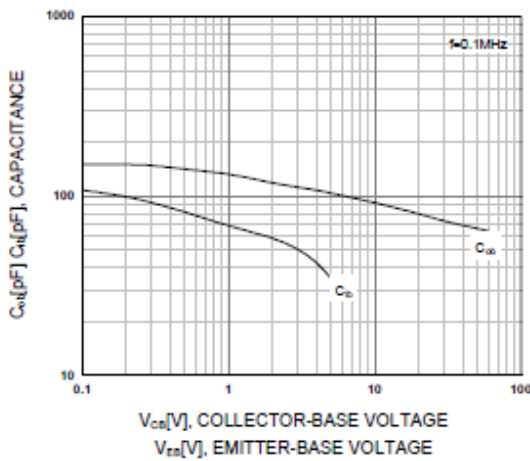


Figure 3. Output and Input Capacitance
vs. Reverse Voltage

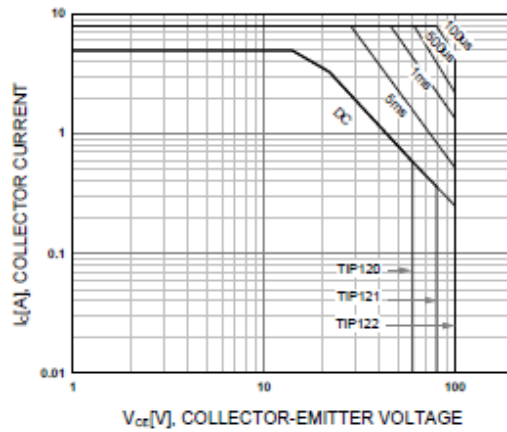


Figure 4. Safe Operating Area

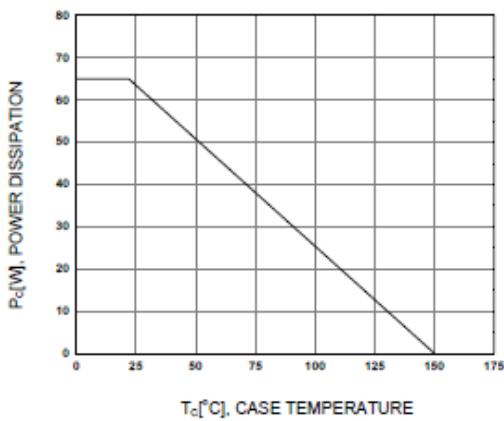


Figure 5. Power Derating

Medium Power Linear Switching Applications

TIP122

PACKAGE OUTLINE

Plastic surface mounted package

TO-220AB

