



## NPN TIP35-A-B-C

### SILICON POWER TRANSISTORS

They are PNP power transistors mounted in jedec TO-3PN. They are intended for use in general purpose power amplifier and switching applications.  
 PNP complements are TIP36-A-B-C  
 Compliance to RoHS.

#### ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit
$V_{CBO}$	Collector-Base Voltage	TIP35	40	V
		TIP35A	60	
		TIP35B	80	
		TIP35C	100	
$V_{CEO}$	Collector-Emitter Voltage	TIP35	40	V
		TIP35A	60	
		TIP35B	80	
		TIP35C	100	
$V_{EBO}$	Emitter-Base Voltage	TIP35	5	V
		TIP35A		
		TIP35B		
		TIP35C		
$I_c$	Collector Current	TIP35	25	A
		TIP35A		
		TIP35B		
		TIP35C		
$I_{CM}$	Collector Peak Current	TIP35	40	A
		TIP35A		
		TIP35B		
		TIP35C		

## NPN TIP35-A-B-C

### ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit
$I_B$	Base Current	TIP35	5	A
		TIP35A		
		TIP35B		
		TIP35C		
$P_c$	Power Dissipation	@ $T_c < 25^\circ$	125	Watts
		TIP35		
		TIP35A		
		TIP35B		
		TIP35C		
		@ $T_a < 25^\circ$	3.5	
		TIP35		
		TIP35A		
TIP35B				
TIP35C				
$T_J$	Junction Temperature	TIP35	150	$^\circ\text{C}$
		TIP35A		
		TIP35B		
		TIP35C		
$T_s$	Storage Temperature range	TIP35	-65 to +150	$^\circ\text{C}$
		TIP35A		
		TIP35B		
		TIP35C		

### THERMAL CHARACTERISTICS

Symbol	Ratings		Value	Unit
$R_{thJ-MB}$	From junction to mounting base	TIP35	1	$^\circ\text{C/W}$
		TIP35A		
		TIP35B		
		TIP35C		
$R_{thJ-A}$	From junction to ambient in free air	TIP35	35.7	$^\circ\text{C/W}$
		TIP35A		
		TIP35B		
		TIP35C		

## NPN TIP35-A-B-C

### ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted


Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit		
$I_{CES}$	Collector Cutoff Current	$I_E = 0, V_{CE} = V_{CEO}$	TIP35	-	-	0.7	Ma	
			TIP35A					
			TIP35B					
			TIP35C					
$I_{CEO}$	Collector Cutoff Current	$I_B = 0, V_{CE} = 30V$	TIP35	-	-	1	mA	
			TIP35A					
		$I_B = 0, V_{CE} = 60V$	TIP35B	-	-	1		
			TIP35C					
$I_{EBO}$	Emitter Cutoff Current	$V_{EB} = 5 V, I_C = 0$	TIP35	-	-	1	mA	
			TIP35A					
			TIP35B					
			TIP35C					
$V_{CEO}$	Collector-Emitter Breakdown Voltage (*)	$I_C = 30 mA, I_B = 0$	TIP35	40	-	-	V	
			TIP35A	60	-	-		
			TIP35B	80	-	-		
			TIP35C	100	-	-		
$V_{CE(SAT)}$	Collector-Emitter saturation Voltage (*)	$I_C = 15 A, I_B = 1.5 A$	TIP35	-	-	1.8	V	
			TIP35A					
			TIP35B					
			TIP35C					
			$I_C = 25 A, I_B = 5 A$	TIP35	-	-	4	V
				TIP35A				
				TIP35B				
				TIP35C				
$V_{BE(on)}$	Base-Emitter Voltage (*)	$I_C = 15 A, V_{CE} = 4 V$	TIP35	-	-	2	V	
			TIP35A					
			TIP35B					
			TIP35C					
			$I_C = 25 A, V_{CE} = 4 V$	TIP35	-	-	4	V
				TIP35A				
				TIP35B				
				TIP35C				
$h_{FE}$	DC Current Gain (*)	$V_{CE} = 4 V, I_C = 1.5 A$	TIP35	25	-	-	-	
			TIP35A					
			TIP35B					
			TIP35C					
			$V_{CE} = 4 V, I_C = 15 A$	TIP35	15	-		75
				TIP35A				
				TIP35B				
				TIP35C				

(\*) Pulse Width  $\approx 300 \mu s$ , Duty Cycle  $\angle 2.0\%$

## NPN TIP35-A-B-C

Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit	
$f_T$	Current Gain-Bandwidth Product	$V_{CE}= 10\text{ V}$ , $I_C= 10\text{ A}$ $f= 1\text{ kHz}$	TIP35	3	-	-	MHz
			TIP35A				
			TIP35B				
			TIP35C				

### MECHANICAL DATA CASE TO3PN Non Isolated Plastic Package

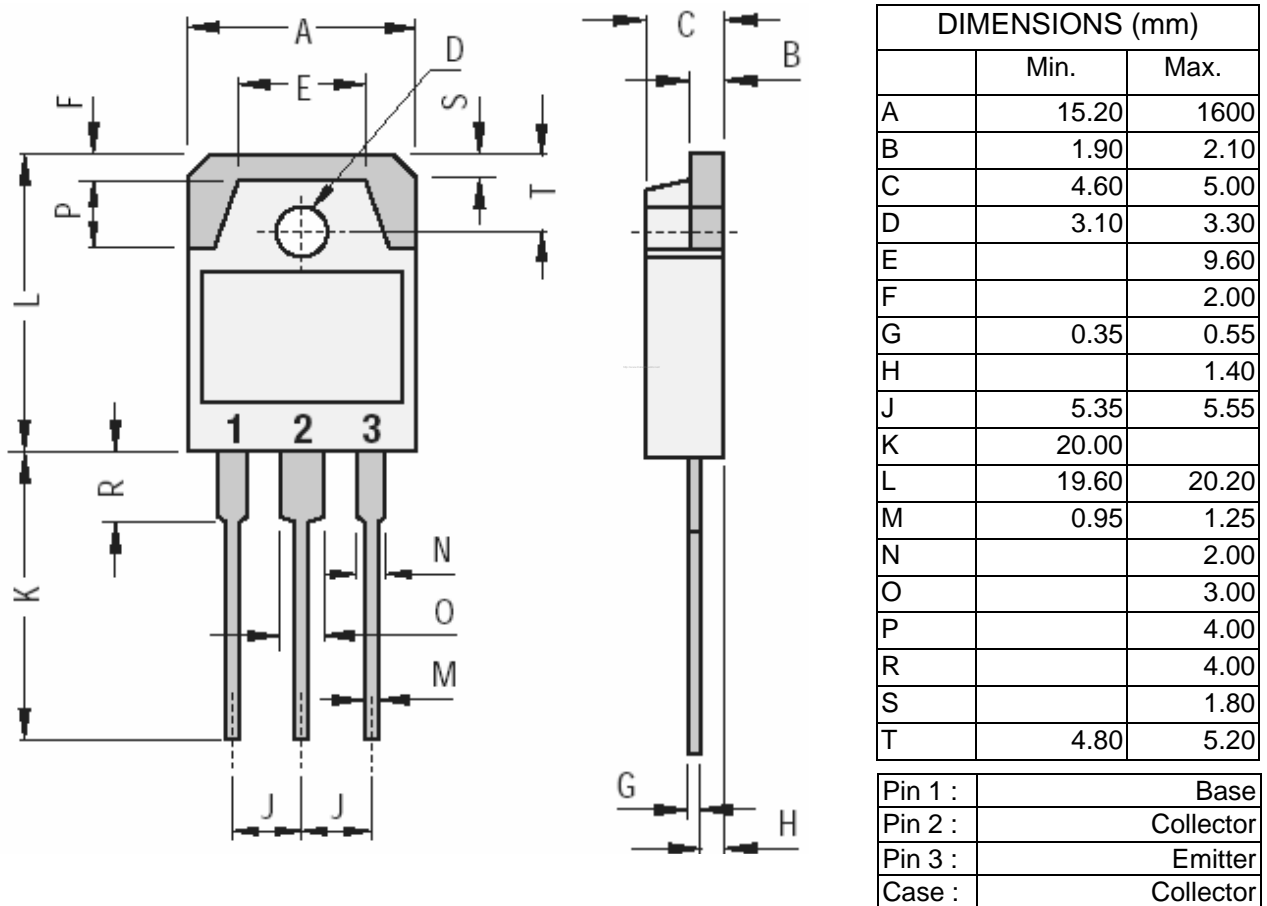

September 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.