

TL100V



Single Level 3.81 mm Pitch Vertical PCB Terminal Blocks with wire protector clamp.

- 1) Wire Protector Type Connection.
- 2) Smallest foot print for 1.5 sq mm wire termination in 3.81 mm Pitch.

**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
TL100V-2P	Single level 3.81 mm Pitch wire protector clamp terminal block available in vertical version in 2 Pole.	50
TL100V-3P	Single level 3.81 mm Pitch wire protector clamp terminal block available in vertical version in 3 Pole.	50

**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/3.81/XX	Marking Tags for PCB Terminal Blocks of 3.81 mm Pitch from 2 to 24 Poles	50


**APPROVALS**



**NOTES**

Available in 2 and 3 Pole and it is stack able .

**PRODUCT DIAGRAM**

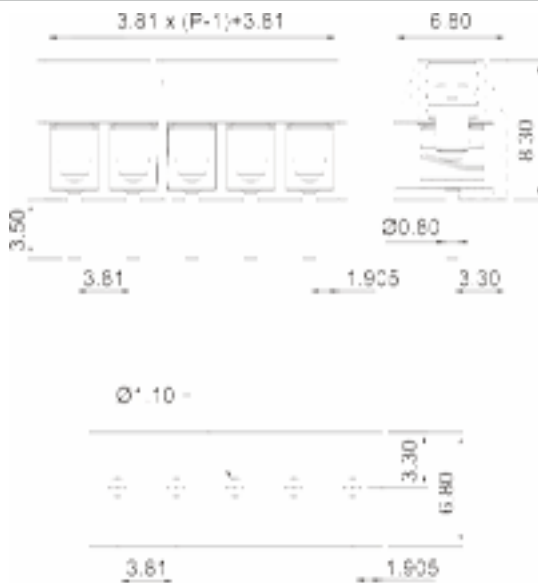

**RATINGS AS PER STANDARDS**

STANDARDS

UL 1059

EN61984

TL100V



**connectwell**  
THE RIGHT CONNECTION

**RATINGS AS PER STANDARDS**

Approvals	UL	
Conductor Cross Section Stranded min.	24 AWG	0.5 mm <sup>2</sup>
Conductor Cross Section Stranded max.	16 AWG	1.5 mm <sup>2</sup>
Rated Voltage	300 V	130 V
Rated Current	6 A	6 A
Tightening Torque	1.8 lb-in	0.2 Nm