

## TL494

## LINEAR INTEGRATED CIRCUIT


VOLTAGE MODE PWM  
CONTROL CIRCUIT

## ■ DESCRIPTION

The UTC **TL494** incorporates all the functions required in the construction of a pulse-width modulation switching circuit. Designed primarily for switching power supply control or DC-DC converters, it offers the systems engineer the flexibility to tailor control circuitry to its own application.


## ■ FEATURES

- \* Complete PWM power control circuitry
- \* Uncommitted outputs for 200mA sink or source current
- \* Output control selects single ended or push pull operation
- \* Internal circuitry prohibits double pulses over total range
- \* Easy synchronization

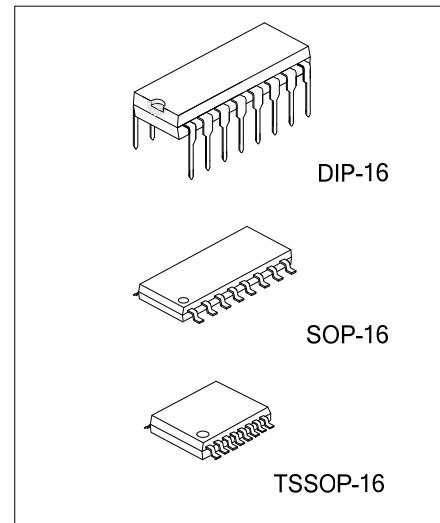


## ■ ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
TL494L-D16-T	TL494G-D16-T	DIP-16	Tube
TL494L-S16-R	TL494G-S16-R	SOP-16	Tape Reel
TL494L-P16-R	TL494G-P16-R	TSSOP-16	Tape Reel

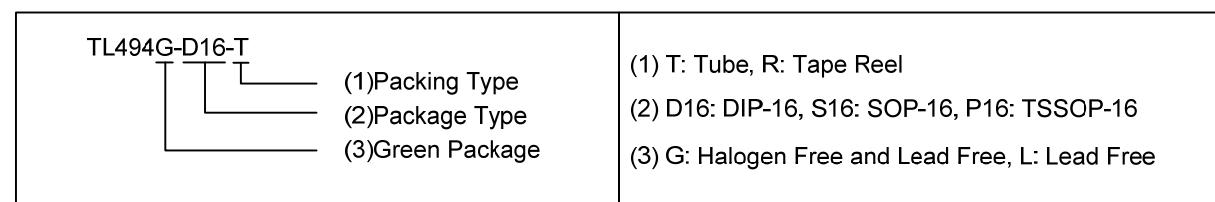

## ■ MARKING

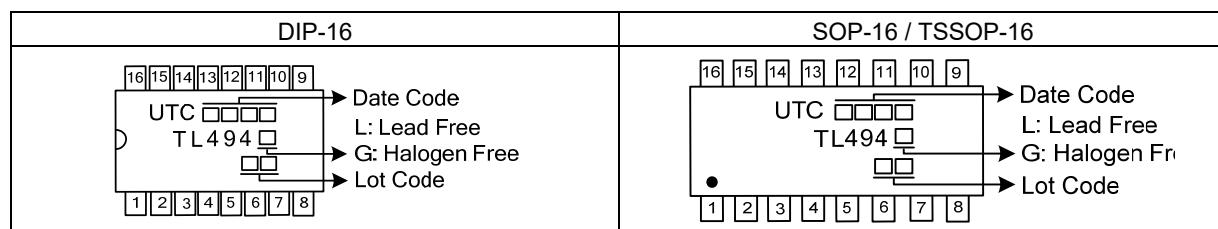


■ PIN CONFIGURATION

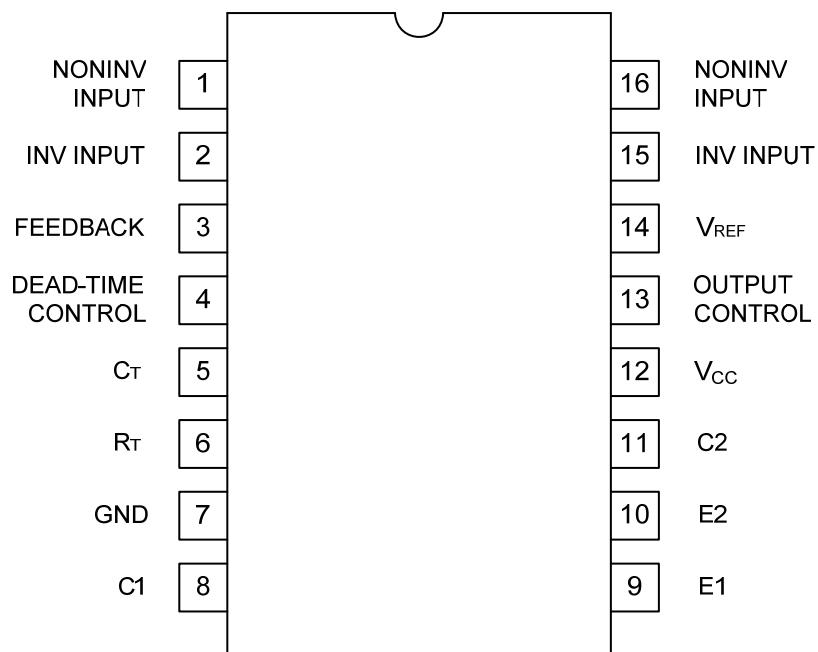

■ PIN DESCRIPTION

PIN No.	SYMBAL	NAME AND FUNCTION
1, 16	NONINV INPUT	Error Amplifier NONINV Input
2, 15	INV INPUT	Error Amplifier INV Input
3	FEEDBACK	Output Feedback Voltage
4	DEAD-TIME CONTROL	Output DEAD-TIME Control
5	$C_T$	Timing Capacitor
6	$R_T$	Timing Resistor
7	GND	Ground
8	C1	Internal Power NPN Collect1
9	E1	Internal Power NPN Emitter1
10	E2	Internal Power NPN Emitter2
11	$C_2$	Internal Power NPN Collect2
12	$V_{CC}$	Supply Voltage
13	OUTPUT CONTROL	Output mode select
14	$V_{REF}$	Reference Voltage

## ■ BLOCK DIAGRAM

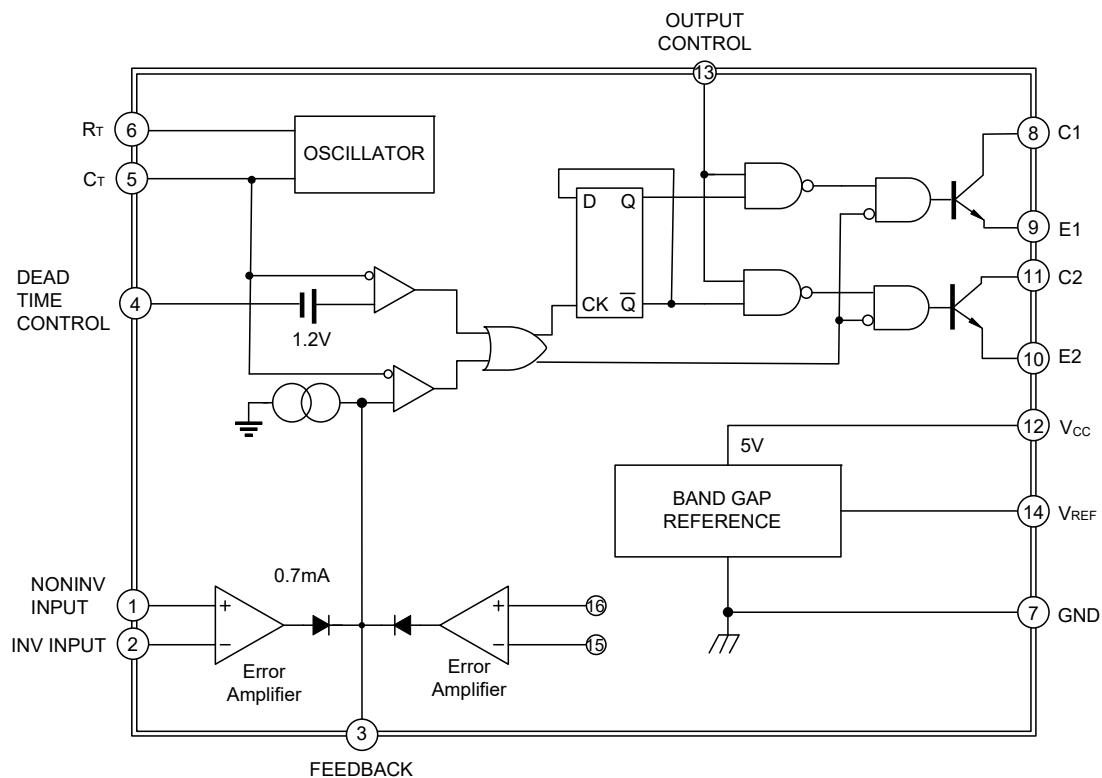

■ ABSOLUTE MAXIMUM RATINGS (unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage(Note 3)	V <sub>CC</sub>	41	V
Amplifier Input Voltage	V <sub>IN</sub>	V <sub>CC</sub> +0.3	V
Collector Output Voltage	V <sub>OUT</sub>	41	V
Collector Output Current	I <sub>CO</sub>	250	mA
Power Dissipation (T <sub>A</sub> =25°C)	P <sub>D</sub>	1000	mW
Derate at T <sub>A</sub> >25°C		9.2	mW/°C
Junction Temperature	T <sub>J</sub>	125	°C
Operating Temperature	T <sub>OPR</sub>	-25 ~ +85	°C
Storage Temperature	T <sub>STG</sub>	-40 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. All voltage values, except differential voltages are with respect to the network ground terminal.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Supply Voltage	V <sub>CC</sub>	7		40	V
Amplifier Input Voltage	V <sub>IN</sub>	-0.3		V <sub>CC</sub> -2	V
Collector Output Voltage	V <sub>OUT</sub>			40	V
Collector Output Current (each Transistor)	I <sub>C</sub>			200	mA
Current into Feedback	I <sub>f</sub>			0.3	mA
Timing Capacitor	C <sub>T</sub>	0.47		10000	nF
Timing Resistor	R <sub>T</sub>	1.8		500	kΩ
Oscillator Frequency	f <sub>osc</sub>	1		300	kHz
Operating Free-Air Temperature	T <sub>A</sub>	0		70	°C

■ ELECTRICAL CHARACTERISTICS

(Over recommended operating free-air temperature range, V<sub>CC</sub>=15V, f=1kHz, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>REFERENCE SECTION</b>						
Output Voltage	V <sub>OUT</sub>	I <sub>OUT</sub> =1mA	4.75	5	5.25	V
Input Regulation	V <sub>IN</sub>	V <sub>CC</sub> =7V ~ 40V		2	25	mV
Output Regulation	V <sub>OUT</sub>	I <sub>OUT</sub> =1 ~ 10mA		1	15	mV
Output Voltage Change with Temperature		ΔT <sub>A</sub> =MIN ~ MAX(note 2)		0.2	1	%
Short-Circuit Output Current	I <sub>O(SC)</sub>	V <sub>REF</sub> =0		35		mA
<b>OSCILLATOR SECTION</b>						
Frequency	F	C <sub>T</sub> =0.01μF, R <sub>T</sub> =12kΩ		10		kHz
Standard Deviation of Frequency		All Values of V <sub>CC</sub> C <sub>T</sub> , R <sub>T</sub> , T <sub>A</sub> constant		10		%
Frequency Change with Voltage		V <sub>CC</sub> =7V ~ 40V, T <sub>A</sub> =25°C		0.1		%
Frequency Change with Temperature		C <sub>T</sub> =0.01μF, R <sub>T</sub> =12kΩ, ΔT <sub>A</sub> =MIN ~ MAX			12	%

## ■ ELECTRICAL CHARACTERISTICS(Cont.)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>AMPLIFIER SECTION</b>							
Input Offset Voltage	Error	V <sub>I(OFF)</sub>	V <sub>OUT</sub> (pin 3)=2.5V		2	10	mV
Input Offset Current		I <sub>I(OFF)</sub>	V <sub>OUT</sub> (pin 3)=2.5V		25	250	nA
Input Bias Current		I <sub>I(BIAS)</sub>	V <sub>OUT</sub> (pin 3)=2.5V		0.2	1	μA
Common-Mode Input Voltage Range	Error		V <sub>CC</sub> =7V ~ 40 V	-0.3 ~ V <sub>CC</sub> -2			V
Open-Loop Voltage Amplification			ΔV <sub>OUT</sub> =3V, V <sub>OUT</sub> =0.5V ~ 3.5V	70	95		dB
Unity-Gain Bandwidth		G <sub>BW</sub>			800		kHz
Common-Mode Rejection Ratio	Error	CMRR	V <sub>CC</sub> =40V, T <sub>A</sub> =25°C	65	80		dB
Output Sink Current(pin 3)		I <sub>O(SINK)</sub>	V <sub>ID</sub> =-15mV ~ -5V, V(pin 3)=0.5V	0.3	0.7		mA
Output source Current(pin 3)		I <sub>O(SOURCE)</sub>	V <sub>ID</sub> =15mV ~ -5V, V(pin 3)=3.5V	-2			mA
<b>OUTPUT SECTION</b>							
Collector off-state current		I <sub>C(OFF)</sub>	V <sub>CE</sub> =40V, V <sub>CC</sub> =40V		2	100	μA
Emitter off-state Current		I <sub>E(OFF)</sub>	V <sub>CC</sub> =V <sub>C</sub> =40V, V <sub>E</sub> =0			-100	μA
Collector -emitter	Common-emitter		V <sub>E</sub> =0, I <sub>c</sub> =200mA		1.1	1.3	V
Saturation Voltage	Emitter-Follower		V <sub>c</sub> =15V, I <sub>E</sub> =-200mA		1.5	2.5	
Output Control Input Current			V <sub>IN</sub> =V <sub>REF</sub>			3.5	mA
<b>DEAD TIME CONTROL SECTION</b>							
Input bias (pin 4)		I <sub>I(BIAS)</sub>	V <sub>IN</sub> =0 ~ 5.25V		-2	-10	μA
Maximum duty cycle, each output			V <sub>IN</sub> (pin 4)=0	45			%
Input threshold Voltage(pin 4)		V <sub>THR</sub>	Zero duty Cycle		3	3.3	V
			Maximum duty cycle	0			
<b>PWM COMPARATOR SECTION</b>							
Input Threshold Voltage(pin 3)		V <sub>THR</sub>	Zero Duty cycle		4	4.5	V
Input Sink Current (pin 3)		I <sub>I(SINK)</sub>	V(pin 3)= 0.7V	0.3	0.7		mA
<b>TOTAL DEVICE</b>							
Standby Supply Current	V <sub>CC</sub> =15V	I <sub>ST-BY</sub>	pin 6 at V <sub>REF</sub> , all other Inputs and outputs open		6	10	mA
	V <sub>CC</sub> =40V				9	15	
Average supply current			V(pin 4)=2V		7.5		mA
<b>SWITCHING CHARACTERISTICS, TA=25°C</b>							
Output Voltage Rise Time	t <sub>R</sub>	Common-emitter configuration			100	200	ns
Output Voltage Fall Time	t <sub>F</sub>				25	100	ns
Output Voltage Rise Time	t <sub>R</sub>	Emitter-follower configuration			100	200	ns
Output Voltage Fall Time	t <sub>F</sub>				40	100	ns

- Notes:
1. All typical Values except for temperature coefficient are at T<sub>A</sub>=25°C.
  2. For conditions shown as MIN or MAX, use appropriate value under recommended operating conditions.
  3. Duration of the short-circuit should not exceed one second.
  4. Standard deviation is a measure of the statistical distribution the mean as derived from the formula:

$$\sigma = \sqrt{\frac{\sum_{n=1}^N (x_n - \bar{x})^2}{N-1}}$$

## ■ TEST CIRCUIT

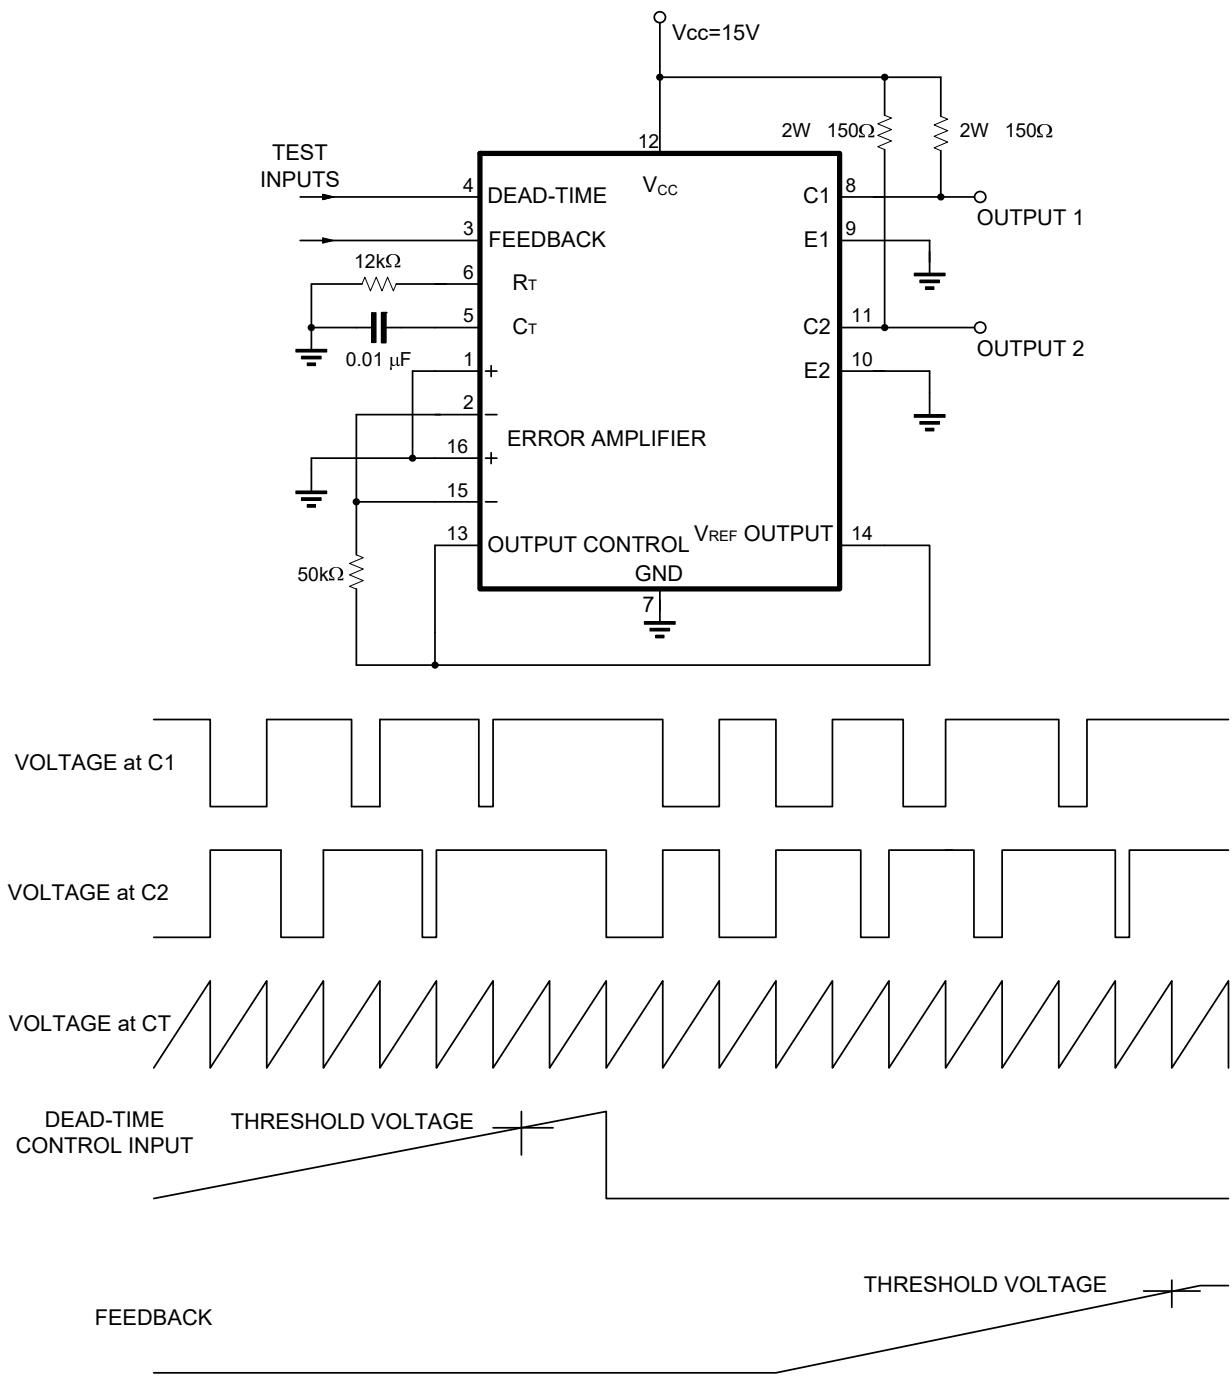


FIG 1. OPERATIONAL TEST CIRCUIT AND WAVEFORMS

■ TEST CIRCUIT(Cont.)

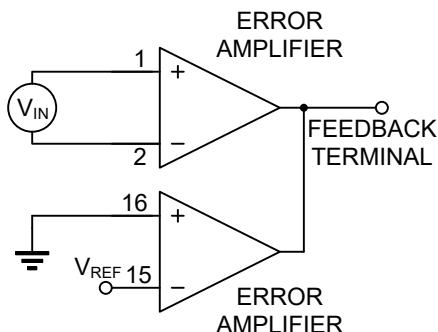


Fig. 2 AMPLIFIER CHARACTERISTICS

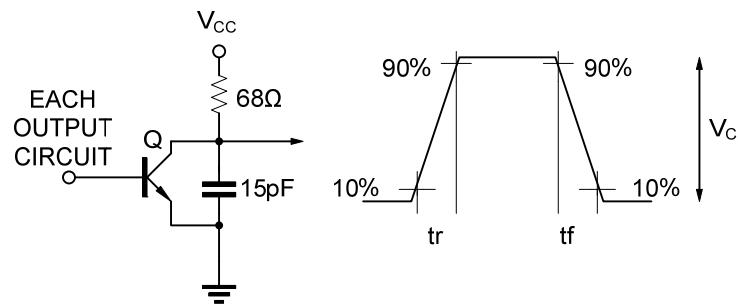


Fig. 3 COMMON-EMITTER CONFIGURATION



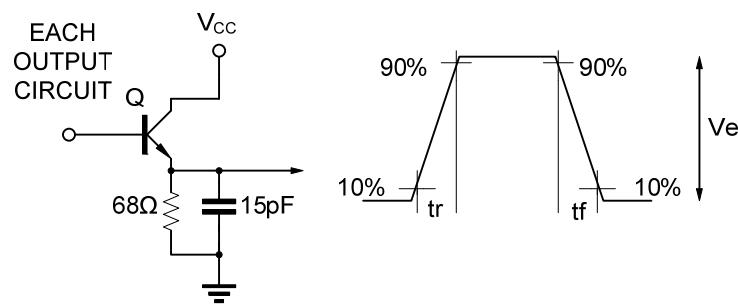


Fig. 4 Emitter -FOLLOWER CONFIGURATION

■ TYPICAL PERFORMANCE CHARACTERISTICS

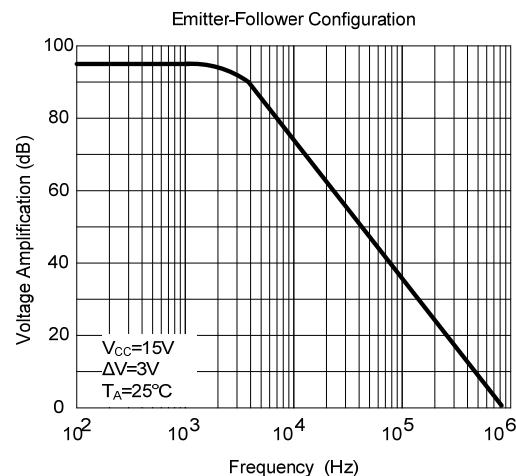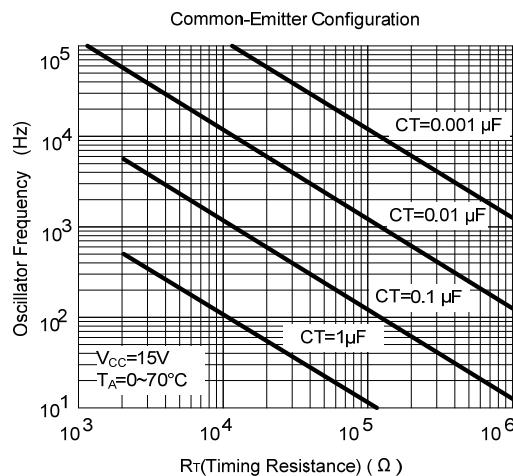

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.