

SPECIFICATION FOR LCD MODULE

Model No. TM0276ANFWG

Prepared by:	Date:
Checked by :	Date:
Verified by :	Date:
Approved by:	Date:

TIANMA MICROELECTRONICS CO., LTD

REVISION RECORD

Date	Ver.	Ref. Page	Revision No.	Revision Items

1. General Specifications:




- 1.1 Display type: TFT
- 1.2 Display color:
 - Display color*¹: 262K(max) COLOR
 - Background*²: Black (Red, Green, Blue dots are off state)
- 1.3 Polarizer mode: Transmissive/Positive
- 1.4 Viewing Angle: 6:00
- 1.5 Driving Method: 1/224 Duty 1/7 Bias
- 1.6 Backlight Type: LED (4 CHIPS)
 - Backlight Color: WHITE
- 1.7 Controller: HD667B89
- 1.8 Data Transfer: 8 Bit Parallel
- 1.9 Operating Temperature: -20----+70
 - Storage Temperature: -30----+80
- 1.10 Power Supply Voltage: VDD=3.0V
- 1.11 LCD Operating Voltage: VLCD=20.0V
- 1.12 Outline Dimensions: Refer to outline drawing on next page
- 1.13 Dot Matrix: 176 X 3 (RGB) X 220 Dots
- 1.14 Pixel Pitch: 0.066mmX0.198mm
- 1.15 Weight: TBD*³

*¹ Color tone is slightly changed by temperature and driving voltage.

*² Color tone will be changed by backlight.

*³ TBD: To Be Determined.

2. Outline Drawing

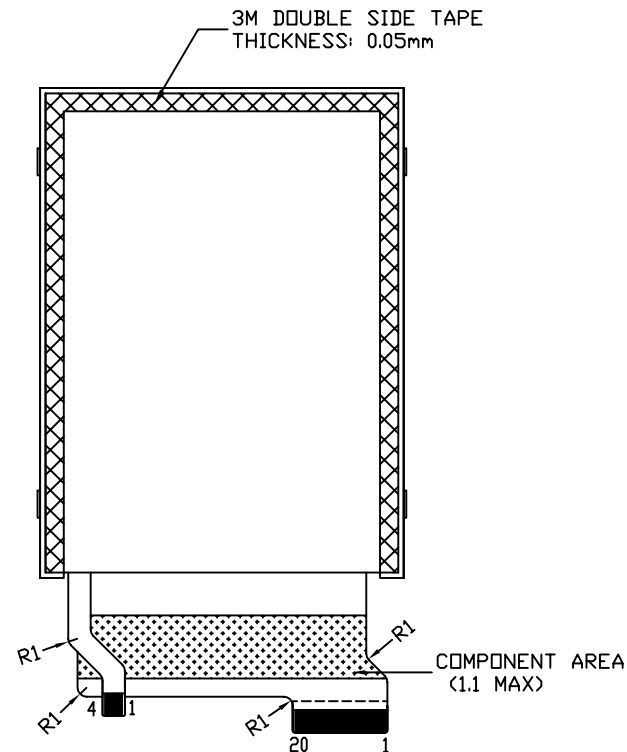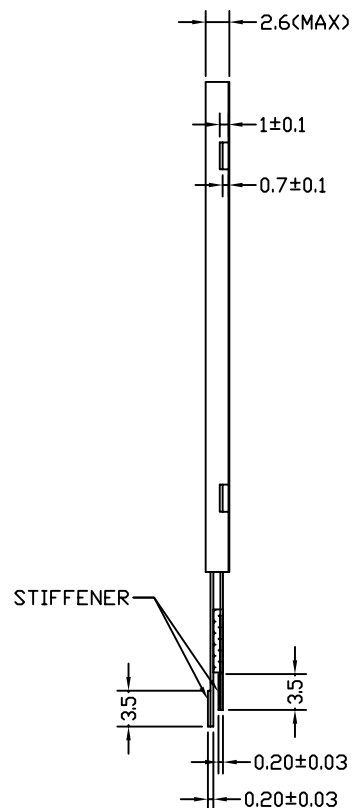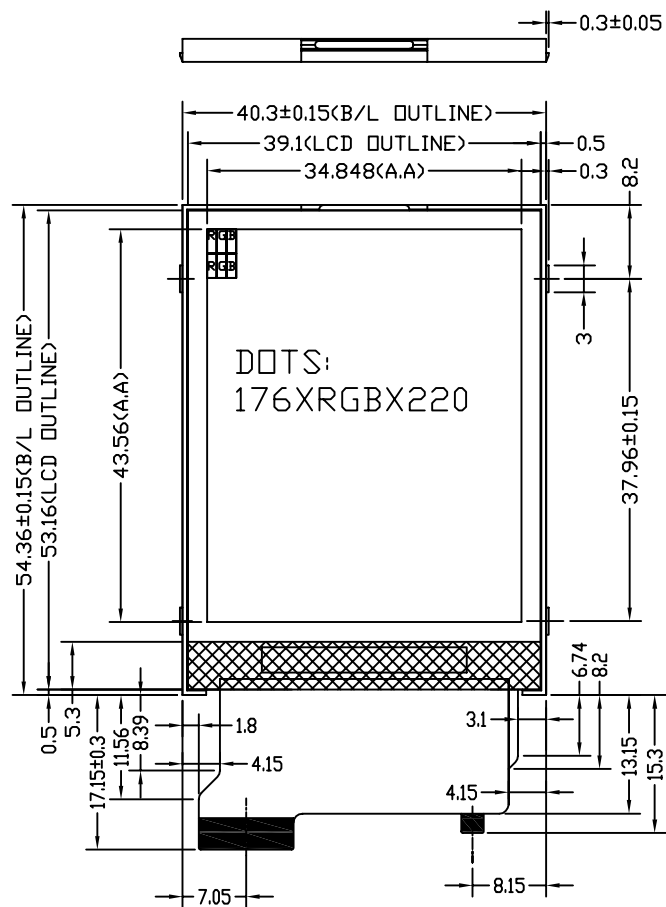

CN1	
1	NC
2	GND
3	GND
4	GND
5	CS
6	RS
7	WR
8	RD
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	RESET
18	VCC
19	VCC
20	NC



CN2		15	DB6
		16	DB7
1	CATHODE	17	RESET
2	CATHODE	18	VCC
3	ANODE	19	VCC
4	ANODE	20	NC

NOTES:

- ```


1.DISPLAY TYPE: TFT(262144-COLOR)
2.VIEWING DIRECTION: 6:00
3.LCD DRIVE IC: HD667B89
4.POLARIZER MODE: TRANSMISSIVE/POSITIVE
5.DRIVE METHOD: 1/224 DUTY 1/7 BIAS
6.VBAT: 2.6~3.2V
7.BACKLIGHT: 4CHIP-WHITE LED
8.OPERATING TEMP: -20°C -- 70°C
9.STORAGE TEMP: -30°C -- 80°C
10.UNMARKED TOLERANCE: ±0.30

```

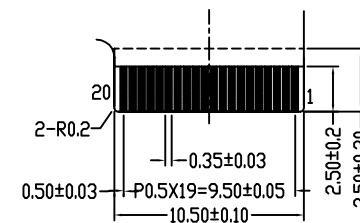


TIAN-MA MICROELECTRONICS CO.


22/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

|               |                          |                                                                                       |             |
|---------------|--------------------------|---------------------------------------------------------------------------------------|-------------|
| DRAWN BY:     | TITLE: TM0276ANFWG       |  |             |
| CHECKED BY:   |                          |                                                                                       |             |
| APPROVED BY:  |                          |                                                                                       | DWG NO: G-1 |
| CONFIRMED BY: | DWG NAME: TM0276AMFWGG-1 | SHEET NO: 1 OF 1                                                                      | UNIT: mm    |

### 3. LCD Module Part Numbering System

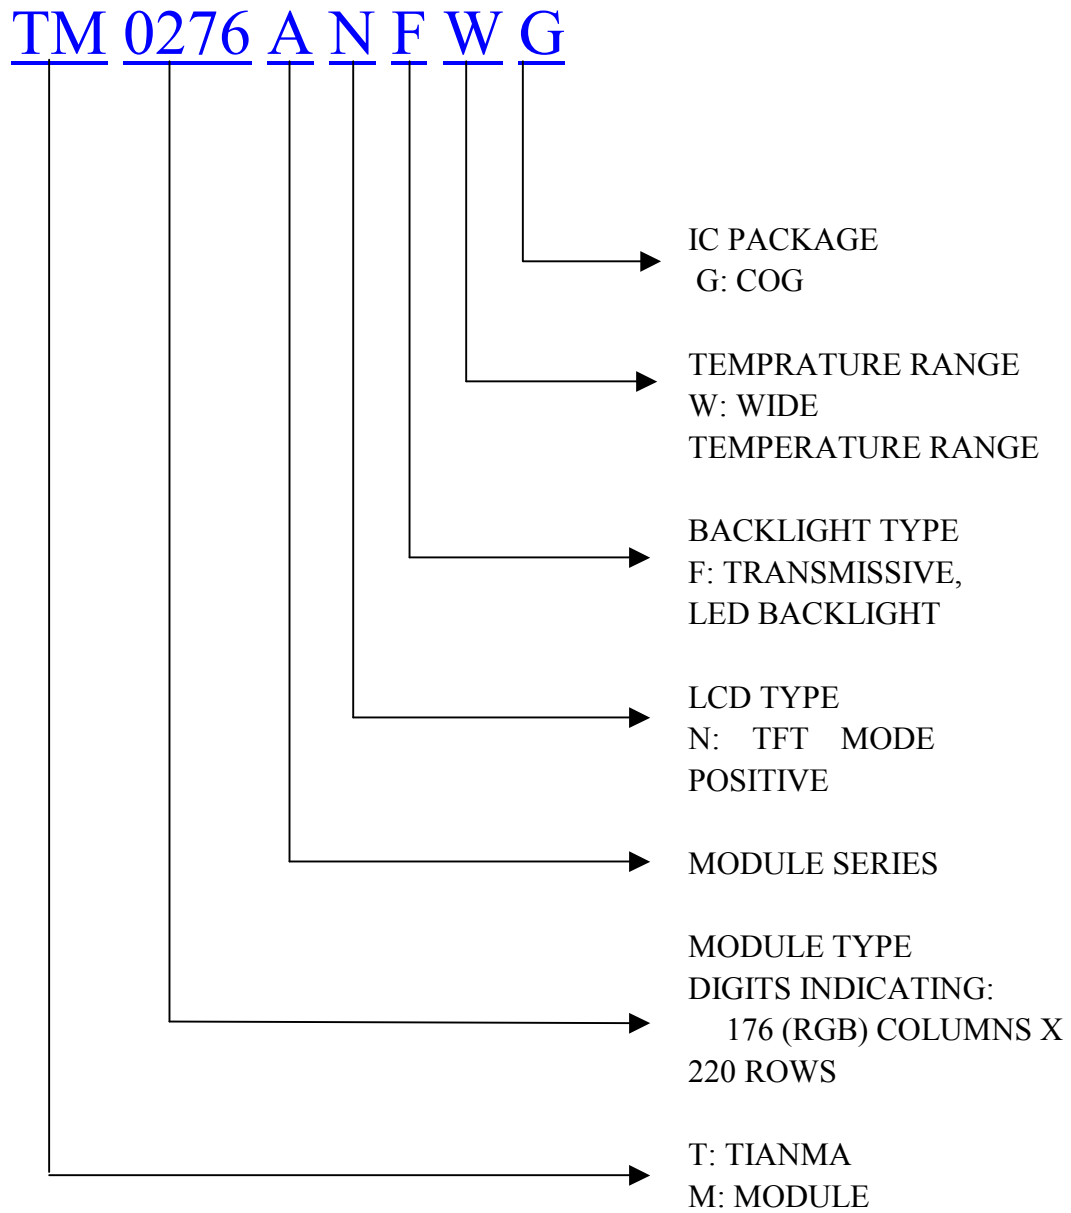

4. Circuit Block Diagram

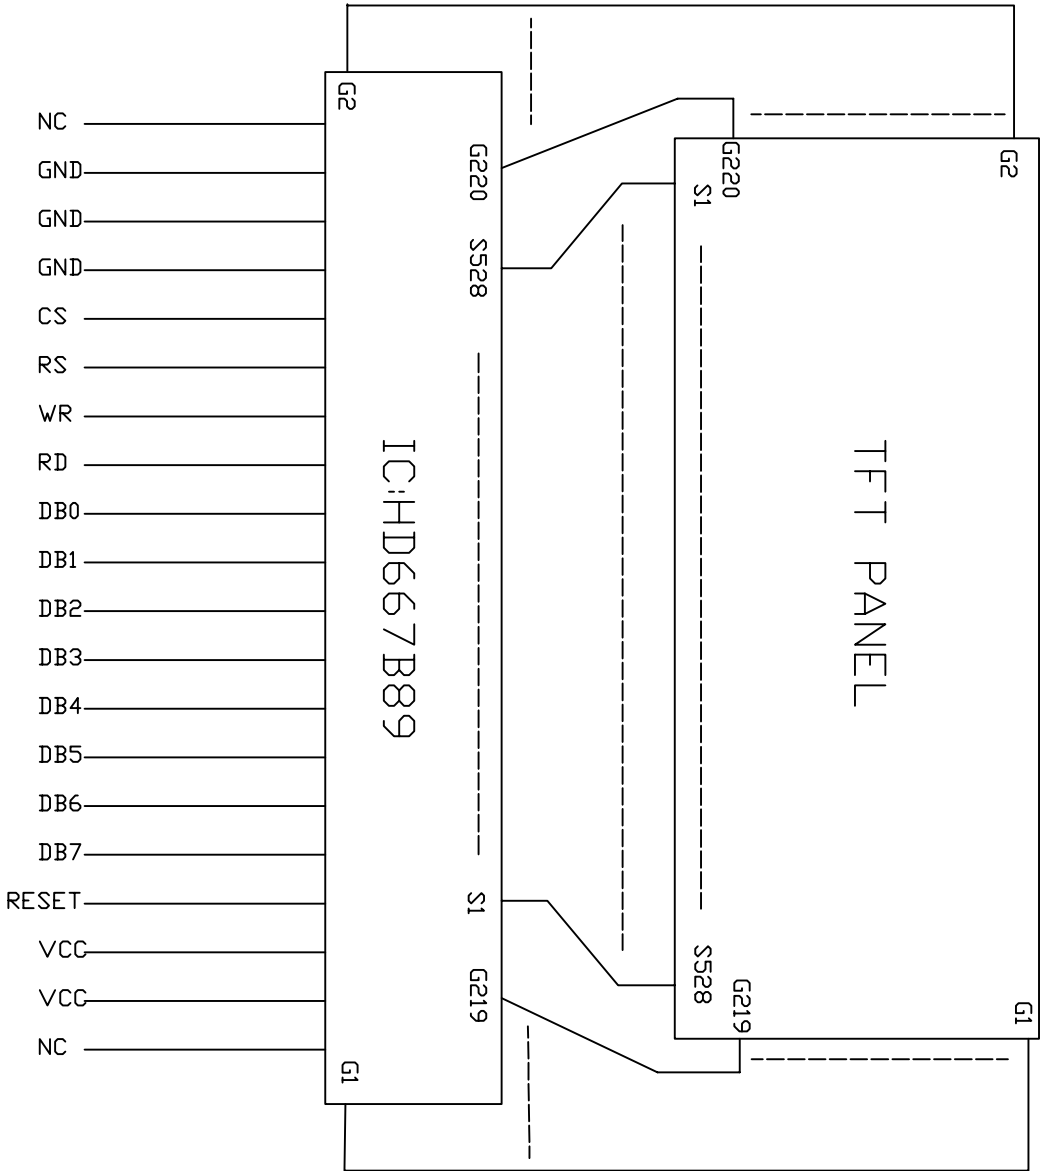

|                                                                                                                                        |     |                         |                                            |
|----------------------------------------------------------------------------------------------------------------------------------------|-----|-------------------------|--------------------------------------------|
| <div><div></div><div>TIAN-MA MICROELECTRONICS CO.</div><div>22/F., CASTIC Building, Shennan Road, Central, Shenzhen, China</div></div> |     |                         |                                            |
| DRAWN                                                                                                                                  | BY: | TITLE: TM0276ATG        |                                            |
| CHECKED                                                                                                                                | BY: | DWG NO: C-1             | SCALE: <div><div></div><div>mm</div></div> |
| APPROVED                                                                                                                               | BY: | DWG NAME: TM0276ATG-C-1 | SHEET NO: 1 OF 1                           |

## 5. Absolute Maximum Ratings

Ta=25

| Item                        | Symbol                            | Min. | Max.  | Unit | Remark             |
|-----------------------------|-----------------------------------|------|-------|------|--------------------|
| Power Supply Voltage        | V <sub>DD</sub> - V <sub>SS</sub> | -0.3 | +4.6  | V    |                    |
| LCD Driving Voltage         | V <sub>LCD</sub>                  | -    | +20.0 |      |                    |
| Operating Temperature Range | T <sub>OP</sub>                   | -20  | +70   |      | No<br>Condensation |
| Storage Temperature Range   | T <sub>ST</sub>                   | -30  | +80   |      |                    |

## 6. Electrical Specifications and Instruction Code

### 6.1 Electrical characteristics

V<sub>SS</sub>=0V, T<sub>a</sub>=25

| Item                       |      | Symbol                                                       | Min.               | Typ. | Max.                | Unit |
|----------------------------|------|--------------------------------------------------------------|--------------------|------|---------------------|------|
| Supply Voltage (Logic)     |      | V <sub>DD</sub> -V <sub>SS</sub>                             | +2.6               | +3.0 | +3.2                | V    |
| Supply Voltage (LCD Drive) |      | V <sub>LCD</sub>                                             | -                  | -    | 20.0                | V    |
| Input Signal Voltage       | High | V <sub>IH</sub><br>( V <sub>DD</sub> =3.0 )                  | 0.8V <sub>DD</sub> | -    | V <sub>DD</sub>     | V    |
|                            | Low  | V <sub>IL</sub><br>( V <sub>DD</sub> =3.0 )                  | 0                  | -    | 0.2 V <sub>DD</sub> | V    |
| Supply current (Logic)     |      | I <sub>DD</sub><br>(V <sub>DD</sub> - V <sub>SS</sub> =3.0V) | -                  | -    | 300                 | uA   |
| Oscillator frequency range |      | f <sub>osc</sub>                                             | 244                | 305  | 366                 | kHz  |
| Supply Voltage (LED)       |      | V <sub>LED</sub>                                             | -                  | 14.0 | -                   | V    |
| Supply current (LED)       |      | I <sub>LED</sub>                                             | -                  | 15.0 | -                   | mA   |
| LCD CURRENT                |      | I <sub>LCD</sub>                                             | -                  | -    | 5                   | mA   |



## 6.2 Interface Signals

### 6.2.1 CN1


| Pin No. | Symbol | Level | Description      |
|---------|--------|-------|------------------|
| 1       | NC     | -     |                  |
| 2       | GND    | 0V    | GROUND           |
| 3       | GND    | 0V    | GROUND           |
| 4       | GND    | 0V    | GROUND           |
| 5       | CS     | H/L   | CHIP SELECT      |
| 6       | RS     | H/L   | REGISTER SELECTS |
| 7       | WR     | H/L   | WRITE SINGAL     |
| 8       | RD     | H/L   | READ SINGAL      |
| 9       | DB0    | H/L   | Data bus bit 0   |
| 10      | DB1    | H/L   | Data bus bit 1   |
| 11      | DB2    | H/L   | Data bus bit 2   |
| 12      | DB3    | H/L   | Data bus bit 3   |
| 13      | DB4    | H/L   | Data bus bit 4   |
| 14      | DB5    | H/L   | Data bus bit 5   |
| 15      | DB6    | H/L   | Data bus bit 6   |
| 16      | DB7    | H/L   | Data bus bit 7   |
| 17      | RESET  | H/L   | RESET            |
| 18      | VCC    | 3V    | SUPPLY POWER     |
| 19      | VCC    | 3V    | SUPPLY POWER     |
| 20      | NC     | -     |                  |

### 6.2.2 CN2


| Pin No. | Symbol  | Level | Description |
|---------|---------|-------|-------------|
| 1       | CATHODE |       | LED CATHODE |
| 2       | CATHODE |       | LED CATHODE |
| 3       | ANODE   |       | LED ANODE   |
| 4       | ANODE   |       | LED ANODE   |

### 6.3 Interface Timing Chart

#### Load circuits for measuring AC characteristics

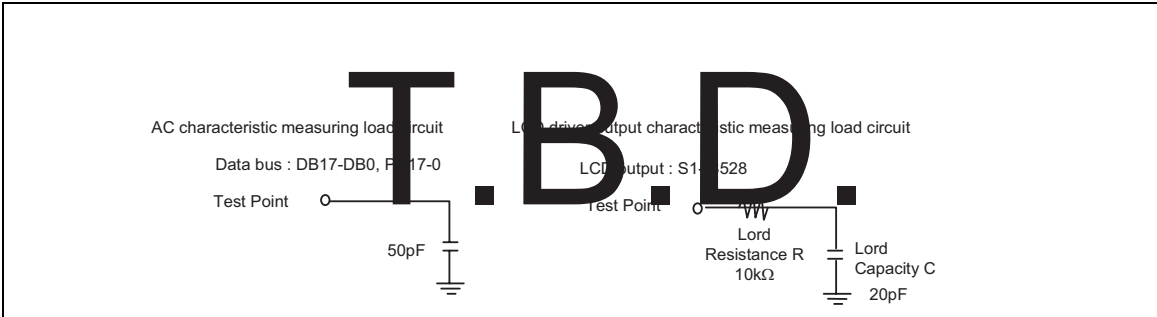


#### 80-system Bus Operation

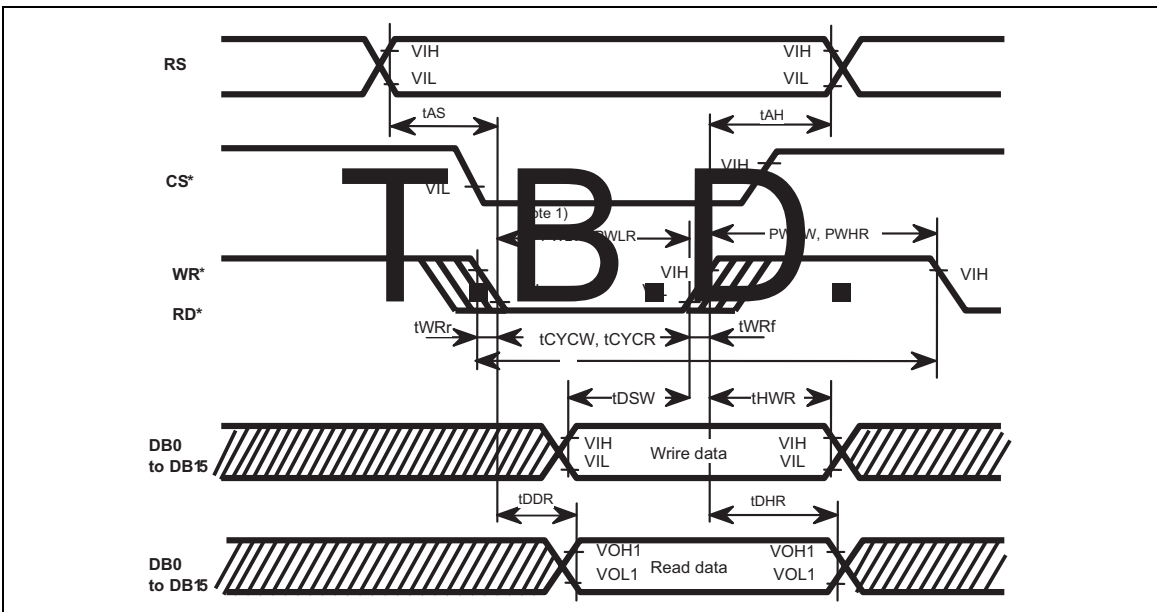

Note 1) PWLW and PWLR is specified in the overlapped period when CS\* is low and WR\* or RD\* is low.

Note 2) Parallel data transfer is enabled on the DB15-8 pins when the 8-bit bus interface is used. Fix the DB7-0 pins to Vcc or GND.


## Clock Synchronized Serial Interface Operation

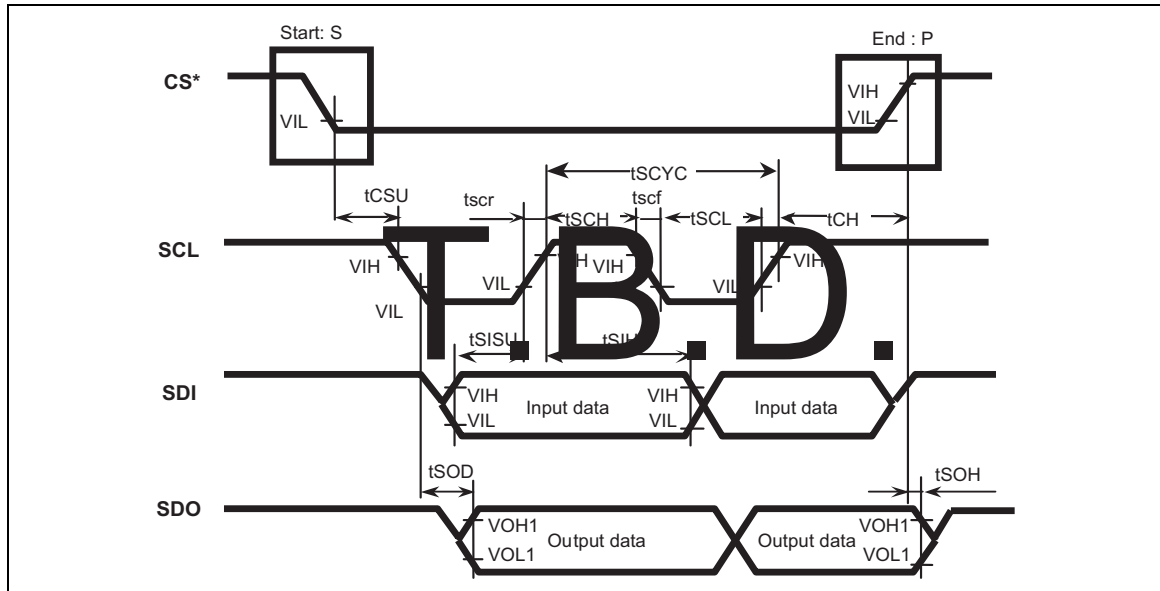

## RESET Operation



# 6.4 Instruction code

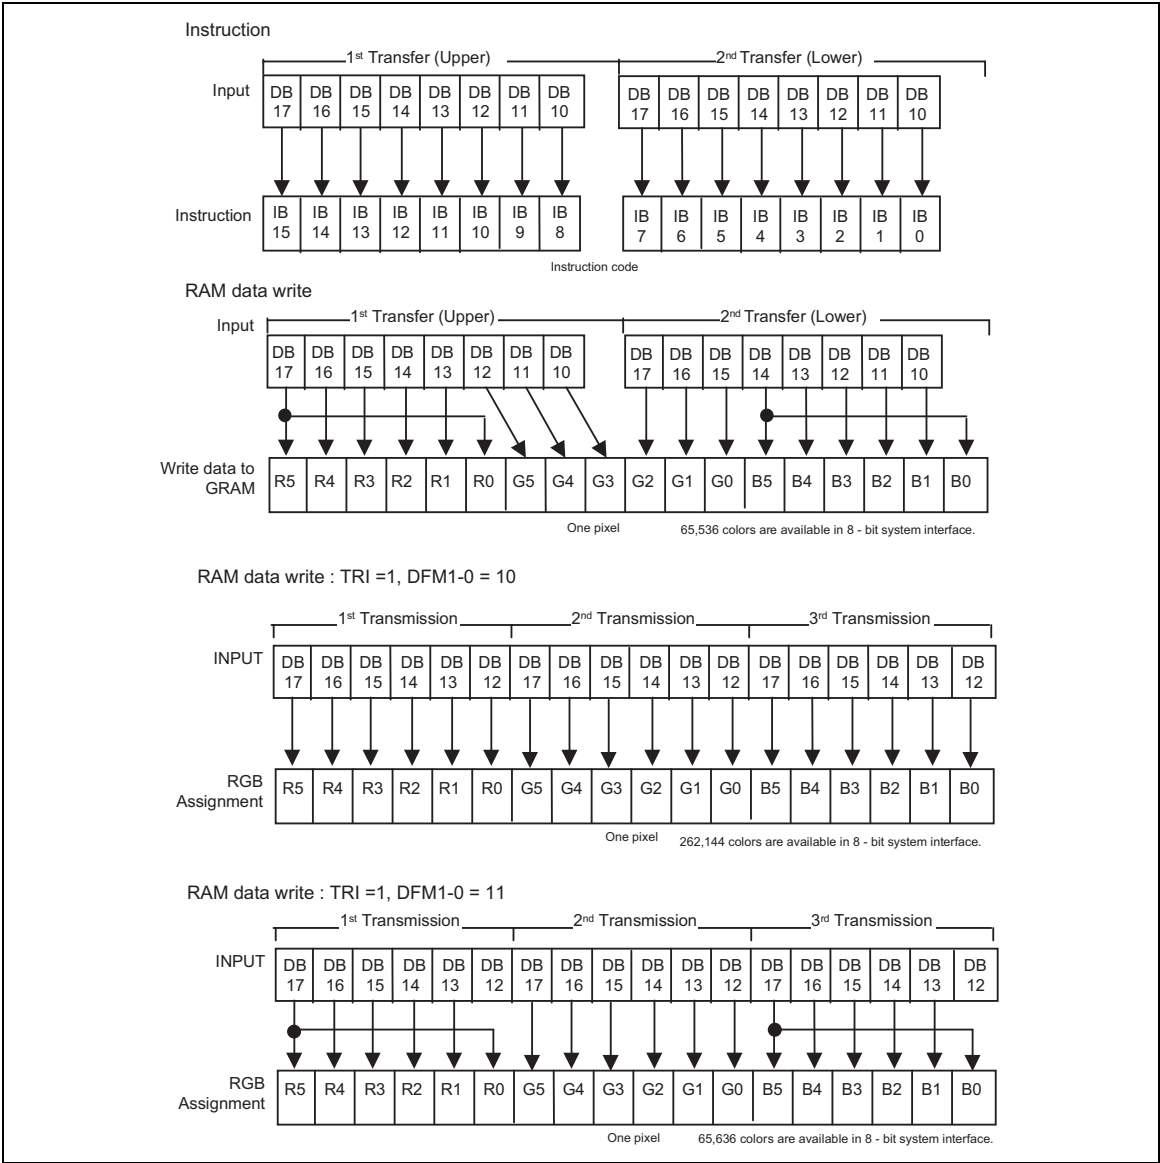

Data format for 8-bit interface

## 7. Optical Characteristics


### 7.1 Optical Characteristics

$V_{LCD}=20.0V$   $T_a=25$


| Item                     |       | Symbol | Condition      |       | Min.             | Typ.  | Max. | Unit |
|--------------------------|-------|--------|----------------|-------|------------------|-------|------|------|
| Viewing Angle            |       | x      | Cr≥10          | y=0 ° | -35    --    +15 |       |      | Deg  |
|                          |       | y      |                | x=0 ° | -45    --    +45 |       |      |      |
| Contrast Ratio           |       | Cr     | x=0 °<br>y=0 ° |       |                  | 150   | -    |      |
| Response Time            |       |        |                |       | --               | 25    |      | ms   |
| Color Of CIE Coord-Inate | Red   | x      | x=0 °<br>y=0 ° |       | -                | 0.593 | -    |      |
|                          |       | y      |                |       | -                | 0.333 | -    |      |
|                          | Green | x      | x=0 °<br>y=0 ° |       | -                | 0.314 | -    |      |
|                          |       | y      |                |       | -                | 0.545 | -    |      |
|                          | Blue  | x      | x=0 °<br>y=0 ° |       | -                | 0.138 | -    |      |
|                          |       | y      |                |       | -                | 0.160 | -    |      |

## 7.2 Definition of Optical Characteristics

### 7.2.1 Definition of Viewing Angle

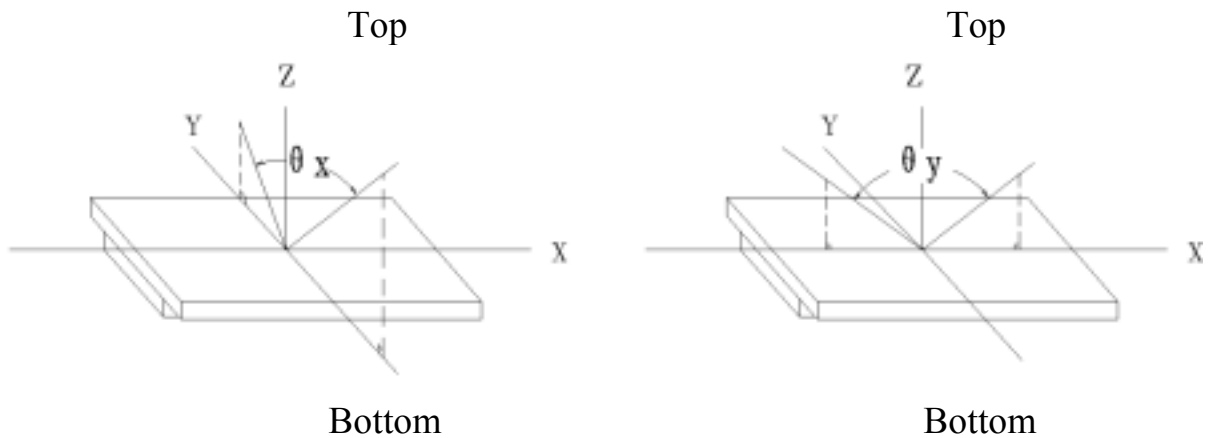

### 7.2.2 Definition of Contrast Ratio

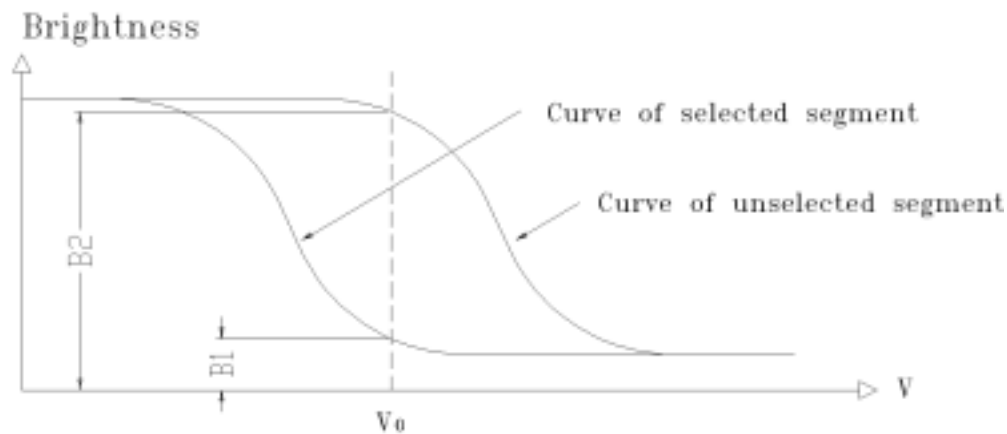


$$\text{Contrast Ratio} = B2/B1 = \frac{\text{unselected state brightness}}{\text{selected state brightness}}$$

Measuring Conditions:

1) Ambient Temperature: 25 ; 2) Frame frequency: 60.0Hz

### 7.2.3 Definition of Response time

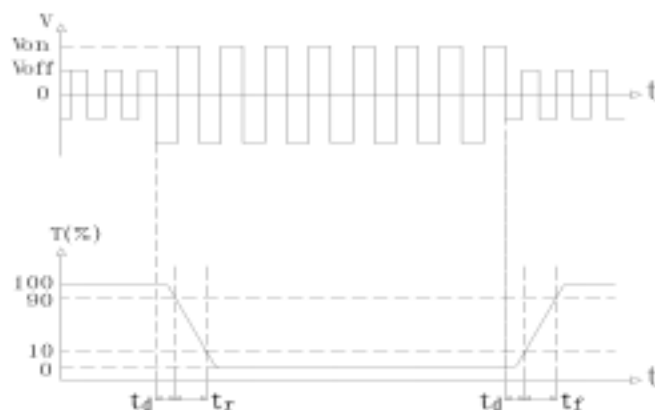

Turn on time:  $t_{on} = t_d + t_r$

Turn off time:  $t_{off} = t_d + t_f$

Measuring Condition:

1) Operating Voltage: 20.0V 2) Frame frequency: 60.0Hz

### 7.3 Brightness Characteristic

| Item       | Symbol | Condition            | Min. | Typ. | Max. | Unit              |
|------------|--------|----------------------|------|------|------|-------------------|
| Brightness | Bp     | Ta=25 ±3<br>30-80%RH | 180  | -    | -    | cd/m <sup>2</sup> |
| Uniformity | Bp     |                      | -    | 80   | -    | %                 |

Note:

1. The data is measured after LED are turned on for 5 minutes.
2. Testing conditions    LED: V<sub>LED</sub> = 14.0 V (DC)  
                                 LCD: All dots are on (White color)
3. Brightness in the center of the LCD panel.
4. Definition of Uniformity ( Bp)  
     Bp = Bp (Min.) / Bp (Max.) X 100 (%)  
     Bp (Max.) = Maximum brightness in 9 measurement spots  
     Bp (Min.) = Minimum brightness in 9 measurement spots

## 8. Reliability

### 8.1 Content of Reliability Test

Ta=25

| No. | Test Item                          | Content of Test                                                                                                       | Test condition                                    |
|-----|------------------------------------|-----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|
| 1   | High Temperature Storage           | Endurance test applying the high storage temperature for a long time                                                  | 80<br>240H                                        |
| 2   | Low Temperature Storage            | Endurance test applying the low storage temperature for a long time                                                   | -30<br>240H                                       |
| 3   | High Temperature Operation         | Endurance test applying the electric stress (voltage & current) and the thermal stress to the element for a long time | 70<br>240H                                        |
| 4   | Low Temperature Operation          | Endurance test applying the electric stress under low temperature for a long time                                     | -20<br>240H                                       |
| 5   | High Temperature /Humidity Storage | Endurance test applying the high temperature and high humidity storage for a long time                                | 65<br>90%RH<br>240H                               |
| 6   | Temperature Cycle                  | Endurance test applying the low and high temperature cycle<br>-30 25 80 25<br>30min 5min 30min 5min<br>1 cycle        | -30 /80<br>10 cycles                              |
| 7   | Vibration Test (package state)     | Endurance test applying the vibration during transportation                                                           | 10Hz~150Hz,<br>100m/s <sup>2</sup> ,<br>120min    |
| 8   | Shock Test (package state)         | Endurance test applying the shock during transportation                                                               | Half- sine wave,<br>300m/s <sup>2</sup> ,<br>18ms |
| 9   | Atmospheric Pressure Test          | Endurance test applying the atmospheric pressure during transportation by air                                         | 25kPa<br>16H                                      |



## 8.2 Failure Judgment Criterion

| Criterion Item           | Test Item No.                                                          |   |   |   |   |   |   |   |   | Failure Judgement Criterion         |
|--------------------------|------------------------------------------------------------------------|---|---|---|---|---|---|---|---|-------------------------------------|
|                          | 1                                                                      | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |                                     |
| Basic Specification      | √                                                                      | √ | √ | √ | √ | √ | √ | √ | √ | Out of the basic Specification      |
| Electrical specification | √                                                                      | √ | √ | √ | √ |   |   |   |   | Out of the electrical specification |
| Mechanical Specification |                                                                        |   |   |   |   |   | √ | √ |   | Out of the mechanical specification |
| Optical Characteristic   | √                                                                      | √ | √ | √ | √ | √ |   |   | √ | Out of the optical specification    |
| Note                     | For test item refer to 8.1                                             |   |   |   |   |   |   |   |   |                                     |
| Remark                   | Basic specification = Optical specification + Mechanical specification |   |   |   |   |   |   |   |   |                                     |

## 9. Quality Level

| Examination<br>or Test                                                                                                                        | At T <sub>a</sub> =25<br>(unless otherwise stated)                                           | Inspection     |      |      |    |                              |
|-----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------------|------|------|----|------------------------------|
|                                                                                                                                               |                                                                                              | Min.           | Max. | Unit | IL | AQL                          |
| External<br>Visual<br>Inspection                                                                                                              | Under normal illumination and eyesight condition, the distance between eyes and LCD is 25cm. | See Appendix A |      |      | II | Major<br>1.0<br>Minor<br>2.5 |
| Display<br>Defects                                                                                                                            | Under normal illumination and eyesight condition, display on inspection.                     | See Appendix B |      |      | II | Major<br>1.0<br>Minor<br>2.5 |
| Note: Major defects: Open segment or common, Short, Serious damages, Leakage<br>Miner defects: Others<br>Sampling standard conforms to GB2828 |                                                                                              |                |      |      |    |                              |

## **10. Precautions for Use of LCD Modules**

### **10.1 Handling Precautions**

10.1.1 The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.

10.1.2 If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.

10.1.3 Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.

10.1.4 The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.

10.1.5 If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:

- Isopropyl alcohol
- Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following:

- Water
- Ketone
- Aromatic solvents

10.1.6 Do not attempt to disassemble the LCD Module.

10.1.7 If the logic circuit power is off, do not apply the input signals.

10.1.8 To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

a. Be sure to ground the body when handling the LCD Modules.

b. Tools required for assembly, such as soldering irons, must be properly ground.

c. To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.

d. The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

## 10.2 Storage precautions

10.2.1 When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

10.2.2 The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:

Temperature :           0     ~   40




Relatively humidity:     80%

10.2.3 The LCD modules should be stored in the room without acid, alkali and harmful gas.

10.3 The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.





## Appendix A

### Inspection items and criteria for appearance defects
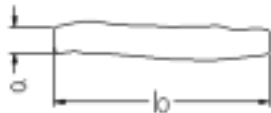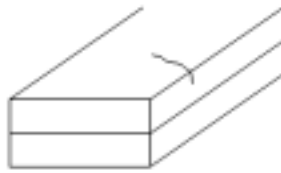
| Items                           | Contents                                                                            | Criteria                        |                                |                                    |
|---------------------------------|-------------------------------------------------------------------------------------|---------------------------------|--------------------------------|------------------------------------|
| Leakage                         |                                                                                     | Not permitted                   |                                |                                    |
| Rainbow                         |                                                                                     | According to the limit specimen |                                |                                    |
| Polarizer                       | Wrong polarizer attachment                                                          | Not permitted                   |                                |                                    |
|                                 | Bubble between polarizer and glass                                                  | Not counted                     | Max. 3 defects allowed         |                                    |
|                                 |                                                                                     | $\phi < 0.3\text{mm}$           | 0.3mm $\phi$ 0.5mm             |                                    |
|                                 | Scratches of polarizer                                                              | According to the limit specimen |                                |                                    |
| Black spot<br>(in viewing area) |  | Not counted                     | Max. 3 spots allowed           | Max. 3 spots<br>(lines)<br>allowed |
|                                 |                                                                                     | $X < 0.2\text{mm}$              | 0.2mm $X$ 0.5mm                |                                    |
|                                 |                                                                                     | $X = (a+b)/2$                   |                                |                                    |
| Black line<br>(in viewing area) |  | Not counted                     | Max. 3 lines allowed           |                                    |
|                                 |                                                                                     | $a < 0.02\text{mm}$             | 0.02mm $a$ 0.05mm<br>$b$ 2.0mm |                                    |
| Progressive cracks              |  | Not permitted                   |                                |                                    |





## Appendix A

### Inspection item and criteria for appearance defects (continued)
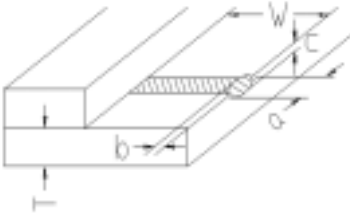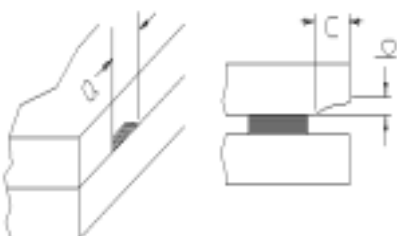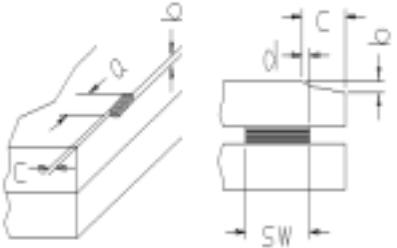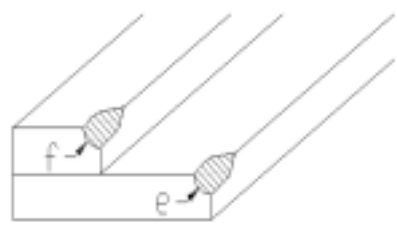
| Items        | Contents                                                                                                          | Criteria                                     |         |         |                       |                       |
|--------------|-------------------------------------------------------------------------------------------------------------------|----------------------------------------------|---------|---------|-----------------------|-----------------------|
| Glass Cracks | Cracks on pads<br>               | a                                            | b       | c       | Max. 2 cracks allowed | Max. 5 cracks allowed |
|              |                                                                                                                   | 3mm                                          | W/5     | T/2     |                       |                       |
|              |                                                                                                                   | 2mm                                          | W/5     | T/2<C<T |                       |                       |
|              | Cracks on contact side<br>      | a                                            | b       |         | Max. 2 cracks allowed |                       |
|              |                                                                                                                   | 3mm                                          | T/2     |         |                       |                       |
|              |                                                                                                                   | 2mm                                          | T/2<b<T |         |                       |                       |
|              |                                                                                                                   | C shall be not reach the seal area           |         |         |                       |                       |
|              | Cracks on non-contact side<br> | a                                            | b       |         | Max. 2 cracks allowed |                       |
|              |                                                                                                                   | 3mm                                          | T/2     |         |                       |                       |
|              |                                                                                                                   | 2mm                                          | T/2<b<T |         |                       |                       |
|              |                                                                                                                   | C 0.5mm                                      |         |         |                       |                       |
|              |                                                                                                                   | d SW/3                                       |         |         |                       |                       |
|              | Corner cracks<br>              | e<2.0mm <sup>2</sup><br>f<2.0mm <sup>2</sup> |         |         | Max. 3 cracks allowed |                       |




## Appendix B

### Inspection items and criteria for display defects
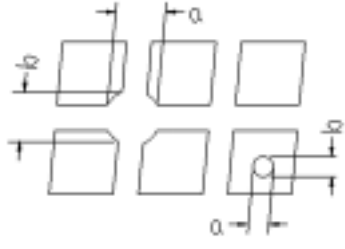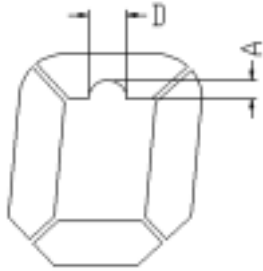
| Items                                 | Contents                                                                            | Criteria                        |                            |                             |
|---------------------------------------|-------------------------------------------------------------------------------------|---------------------------------|----------------------------|-----------------------------|
| Open segment or open common           |                                                                                     | Not permitted                   |                            |                             |
| Short                                 |                                                                                     | Not permitted                   |                            |                             |
| Wrong viewing angle                   |                                                                                     | Not permitted                   |                            |                             |
| Contrast radio uneven                 |                                                                                     | According to the limit specimen |                            |                             |
| Crosstalk                             |                                                                                     | According to the limit specimen |                            |                             |
| Pin holes and cracks in segment (DOT) |   | Not counted                     | Max.3 dots allowed         | Max.3 dots allowed          |
|                                       |                                                                                     | X<0.1mm                         | 0.1mm X 0.2mm              |                             |
|                                       |                                                                                     | X=(a+b)/2                       |                            |                             |
|                                       |  | Not counted                     | Max.2 dots allowed         |                             |
|                                       |                                                                                     | A<0.1mm                         | 0.1mm A 0.2mm<br>D<0.25mm  |                             |
| Black spot (in viewing area)          |  | Not counted                     | Max.3 spots allowed        | Max.3 spots (lines) allowed |
|                                       |                                                                                     | X<0.1mm                         | 0.1mm X 0.2mm              |                             |
|                                       |                                                                                     | X=(a+b)/2                       |                            |                             |
| Black line (in viewing area)          |  | Not counted                     | Max.3 lines allowed        |                             |
|                                       |                                                                                     | a<0.02mm                        | 0.02mm a 0.05mm<br>b 0.5mm |                             |

## Appendix B

### Inspection items and criteria for display defects (continued)
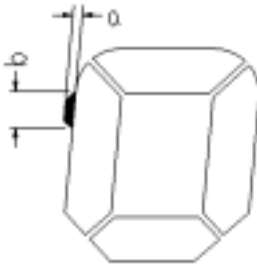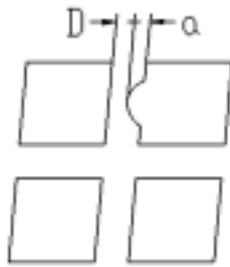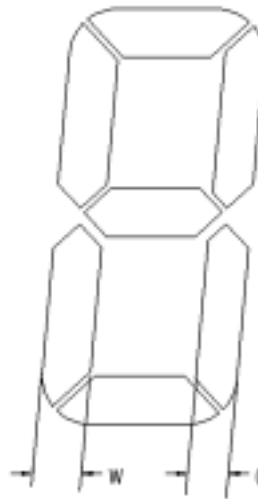
| Items                     | Content                                                                             | Criteria                                                                                                            |                                                    |                      |
|---------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|----------------------|
| Transformation of segment |    | Not counted                                                                                                         | Max. 2 defects allowed                             | Max.3 defect allowed |
|                           |                                                                                     | $x < 0.1\text{mm}$                                                                                                  | $0.1\text{mm} \leq x \leq 0.2\text{mm}$            |                      |
|                           |                                                                                     | $x=(a+b)/2$                                                                                                         |                                                    |                      |
|                           |   | Not counted                                                                                                         | Max. 1 defects allowed                             |                      |
|                           |                                                                                     | $a < 0.1\text{mm}$                                                                                                  | $0.1\text{mm} \leq a \leq 0.2\text{mm}$<br>$D > 0$ |                      |
|                           |  | Max.2 defects allowed<br>$0.8W \leq a \leq 1.2W$<br><br>$a$ =measured value of width<br>$W$ =nominal value of width |                                                    |                      |