


液晶之光 电话: 020-33819057  
 Http://www.lcdfriends.com

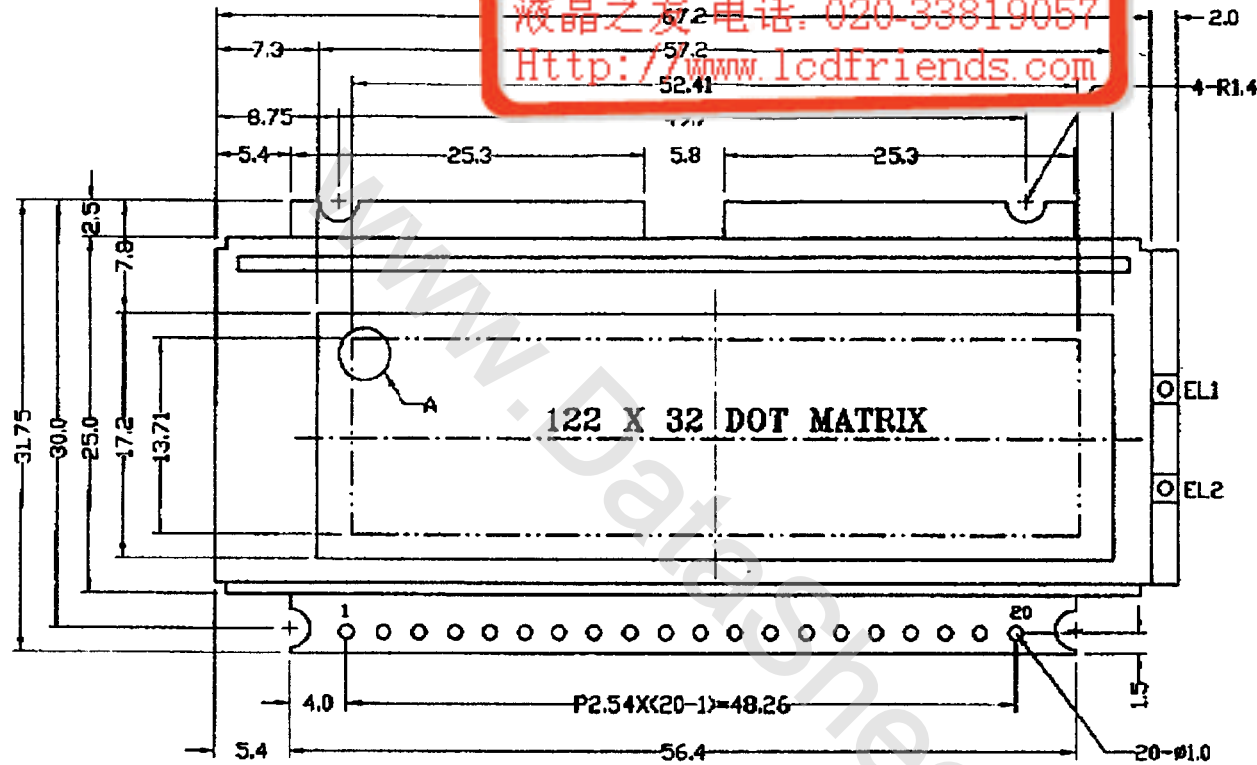


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Vss	Vdd	V0	Vout	A0	E1	E2	D0	D1	NC	NC	D2	D3	D4	D5	D6	D7	NC	NC	NC

NOTES:

- 1.DISPLAY TYPE: STN/B-W MODE
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 4.OPERATING TEMP: 0°C---+50°C
- 5.STORAGE TEMP: -20°C---+60°C
- 6.BEZEL IS TO BE PAINTED BLACK
- 7.ALL UNMARKED TOLERANCES: ±0.3
- 8.DRIVE METHOD: DUTY=1/32 BIAS=1/6
- 9.LCD OPERATING VOLTAGE: 5.9V
- 10.BACKLIGHT TYPE: EL
- 11.CONTROLLER: SED1520DDAX2

DETAIL A:



TIAN-MA MICROELECTRONICS CO.

2/F., WINGKO Building, Shewan Road, Central, Shenzhen, China

DRAWN BY: 梁海	TITLE: TM12232ECB6	SCALE:
CHECKED BY: 梁海	DWG NO: G-1	UNIT: mm
APPROVED BY: 王超	DWG NAME: TM12232ECB6-1	SHEET NO: 07
CONFIRMED BY: 梁海		