



液晶之友 电话: 020-33819057
<http://www.lcdfriends.com>

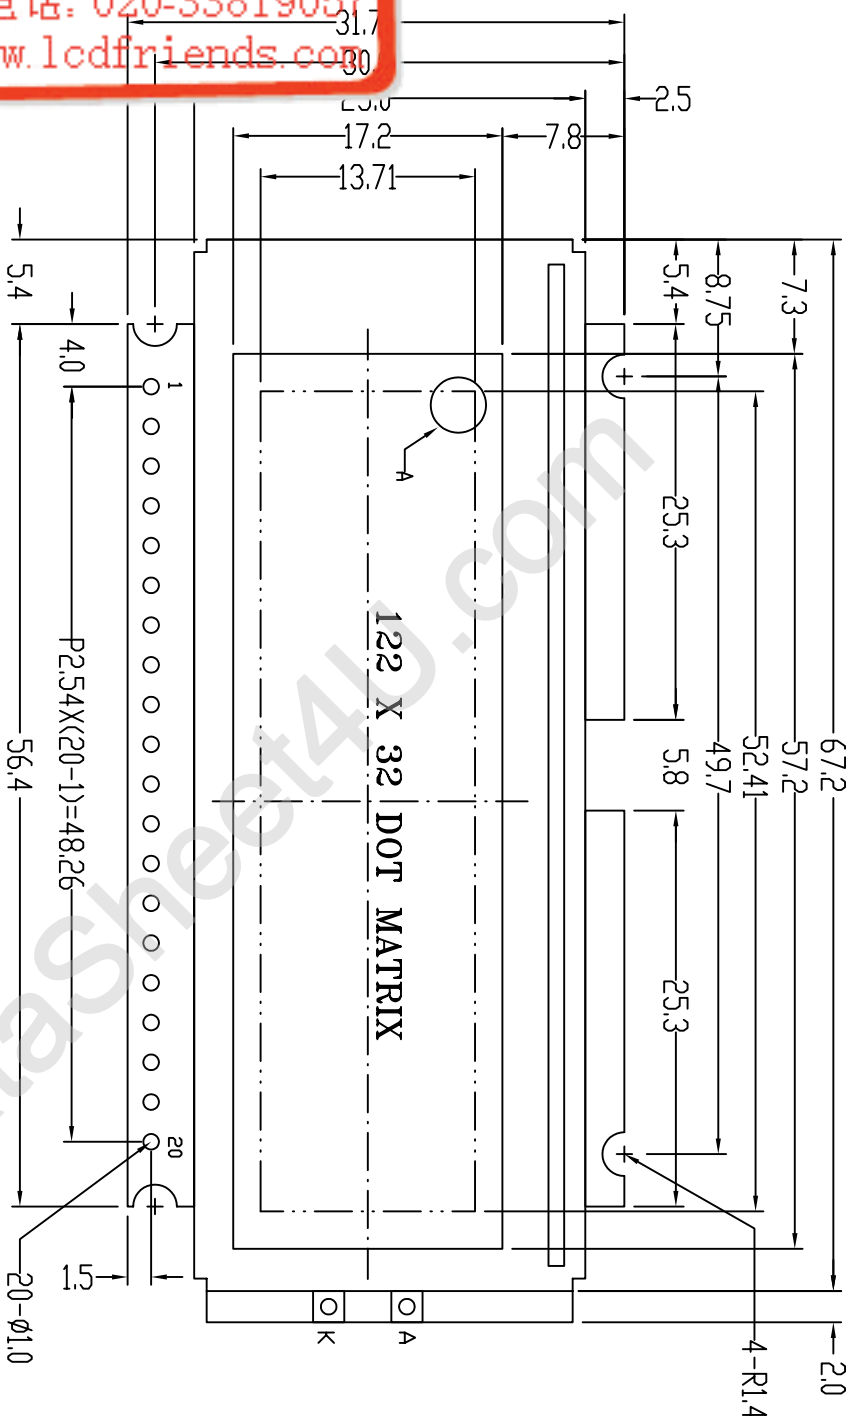


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VSS	Vdd	V0	Vout	A0	E1	E2	D0	D1	NC	NC	D2	D3	D4	D5	D6	D7	NC	A	K

1. DISPLAY TYPE: STN/BLUE MODE
 2. VIEWING DIRECTION: 12:00
 3. POLARIZER MODE: TRANSPARENT/NEGATIVE
 4. DRIVE METHOD: 1/32 DUTY 1/6 BIAS
 5. LCD OPERATING VOLTAGE: 9.0V
 6. OPERATING TEMP: -20°C~+70°C
 7. STORAGE TEMP: -30°C~+80°C
 8. CONTROLLER: SED1520D0A
 9. BACKLIGHT TYPE: LED(WHITE, 30mA, 3.3±0.2V)
 10. BEZEL IS TO BE PAINTED BLACK
 11. UNMARKED TOLERANCES: ±0.3mm

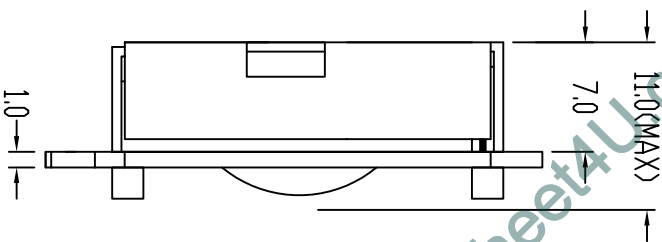

DETAIL A:



TIAN-MA MICROELECTRONICS CO.

22/F., HANGJU Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM12232EFCW06	SCALE:	UNIT: mm
CHECKED BY:	DWG NO: G-1	SCALE:	UNIT: mm
APPROVED BY:	DWG NAME: TM12232EFCW06-1	SHEET NO:	OF
CONFIRMED BY:			