



PIN	SYMBOL	PIN	SYMBOL
1	NC	16	VSS
2	CS1	17	VBLT
3	RES	18	CAP3-
4	A0	19	CAP1+
5	VR	20	CAP1-
6	RD	21	CAP2-
7	DD	22	CAP2+
8	D1	23	V1
9	D2	24	V2
10	D3	25	V3
11	D4	26	V4
12	D5	27	V5
13	D6	28	V6
14	D7	29	C86
15	VDD	30	IR5

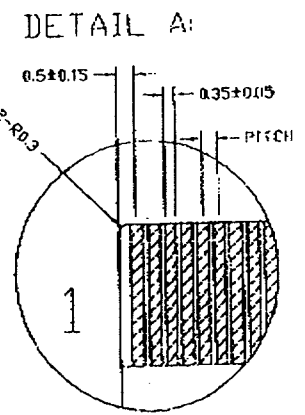

- NOTES:
1. DISPLAY TYPE: STN/BLUE MODE
 2. VIEWING DIRECTION: 6:00
 3. POLARIZER MODE: TRANSMISSIVE/NEGATIVE
 4. DRIVE METHOD: 1/65 DUTY 1/7 BIAS
 5. LCD OPERATING VOLTAGE: 8.9V
 6. VDD: 5.0V
 7. OPERATING TEMP.: -20°C~+70°C
 8. STORAGE TEMP.: -30°C~+80°C
 9. CONTROLLER: S(D)S605D11B
 10. WITH LED BACKLIGHT(WHITE, 5.0V)
 11. CONNECTOR: FPC
 12. UNMARKED TOLERANCE: ±0.3mm
 13. USED LCD: TJCGS-195A

TIAN-MA MICROELECTRONICS
 22/F., HANGDU Building, Shennan Road, Central, Sh

DRAWN BY: 古晓娟 2018-03	TITLE: TM12864A2FFWG
CHECKED BY: 李松 2018-03	DWG NO: G-1
APPROVED BY: 李松	DWG NAME: TM12864A2FFWG-1.DWG
CONFIRMED BY:	