


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
V _{SS}	V _{CC}	V _{EE}	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

NOTE:

1. DISPLAY TYPE: TN
2. VIEWING DIRECTION: 12:00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
5. LCD OPERATING VOLTAGE: 4.7V
6. OPERATING TEMP.: 0°C~+50°C
7. STORAGE TEMP.: -20°C~+60°C
8. BACKLIGHT: LED(4.2V, YELLOW-GREEN)
9. CONTROLLER: S6A0069X01-C0CX
10. BEZEL IS TO BE PAINTED BLACK
11. ALL UNMARKED TOLERANCE: ±0.3mm

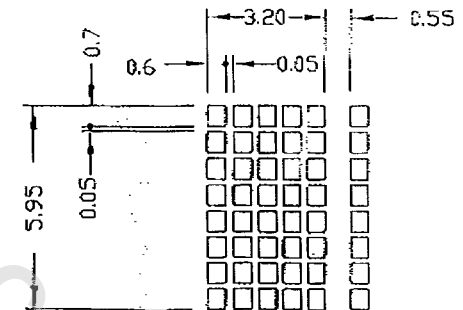

TIAN-MA MICROELECTRONICS CO., LTD.

22/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: [Signature]	TITLE: TM1616AUCU6
CHECKED BY: [Signature]	DWG NO: G-1
APPROVED BY: [Signature]	DWG NAME: TM1616AUCU6-3
CONFIRMED BY: [Signature]	SHEET 3 OF 3